




# LAPTOP SPEAKER STAND

## PRODUCT HANDBOOK

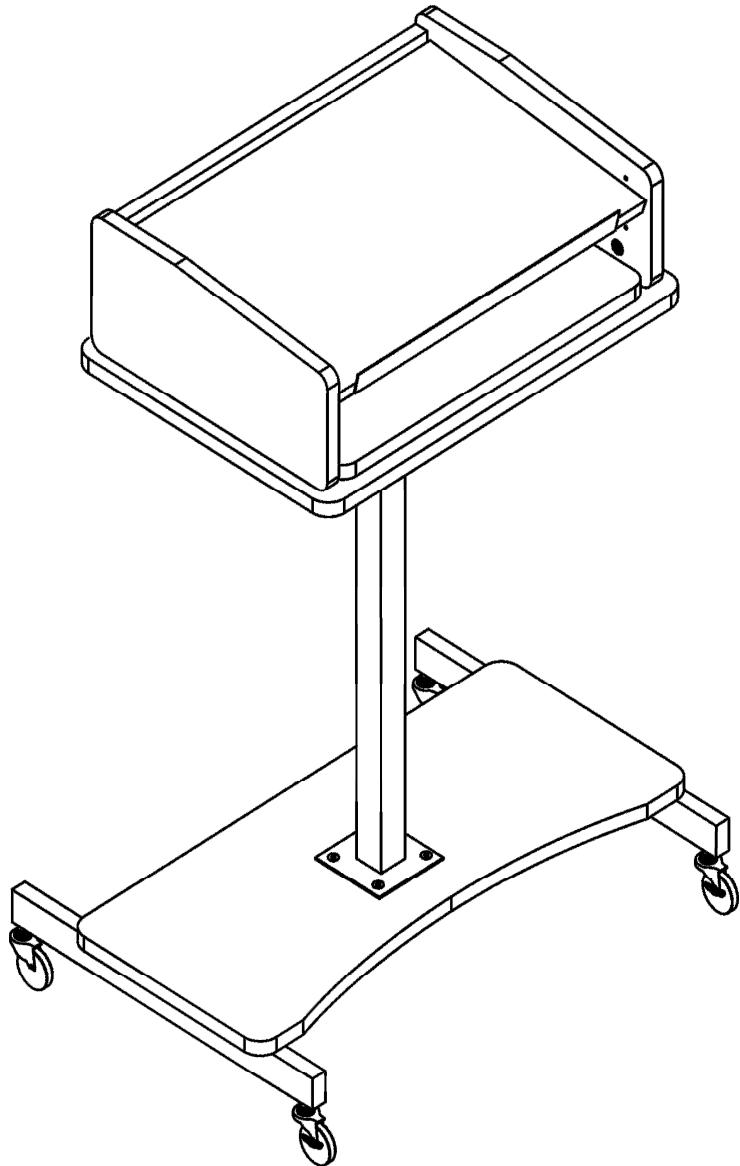

**MODEL # LSS**



# Model #LSS Instruction Manual

Parts List	
(A) 1PC	(B) 1PC
(C) 1PC	(D) 1PC
(E) 1PC	(F) 1PC
(G) 1PC	(H) 1PC
(I) 1PC	

Hardware List					
(1)			(2)		4 pcs
		6 pcs			
(3)			(4)		9 pcs
		4 pcs			
(5)			(6)		4 pcs
		9 pcs			
(7)			(8)		2 pcs
		1pcs			
(9)			(10)		1 pcs
		2 pcs			
(11)					1 pcs

Dear Valued Customer,

Although extreme care goes into manufacturing and packing of this package, mistakes are possible. If you encounter any missing parts or difficulty in assembly, etc. please call our toll free customer service line at 1-800-261-4112 for courteous and immediate resolution to your problem.

Sincerely

Oklahoma Sound


## Manufactures Warranty

Our lecterns undergo the most rigid and exacting test for superior quality and performance before leaving our factory. Oklahoma Sound warrants this product to be free from defective material and workmanship on this unit for five years from the date of resale by an authorized Oklahoma Sound distributor. Oklahoma Sound will replace defective parts and repair malfunctioning products under this warranty when the defect occurs under normal installation and use, provided that the unit is returned to our factory via prepaid transportation after direct authorization and approval from Oklahoma Sound. This warranty provides that examination of the returned product must disclose in our judgment a manufacturing defect. This warranty does not extend to any product which has been subject to misuse, neglect, accident, improper installation or where the serial number has been removed if defective and is given in lieu of any other warranty implied or expressed and will not cover any damage.

**Step 1:**

- a) Begin by identifying panel #A and lying it on a clean, soft surface face down.
- b) Take the steel base frame, Panel #B and place it over the panel as shown with the caster nuts facing upwards.
- c) The four holes on the metal frame should align with the four plastic inserts on panel #A.
- d) Use four bolts # 3 to secure the panel #B to panel #A by inserting the bolts through the holes on panel #B and insert them into the plastic inserts on panel #A as shown.
- e) Use the provided hex key (hardware #10) to tighten the bolts securely.


**STEP1**

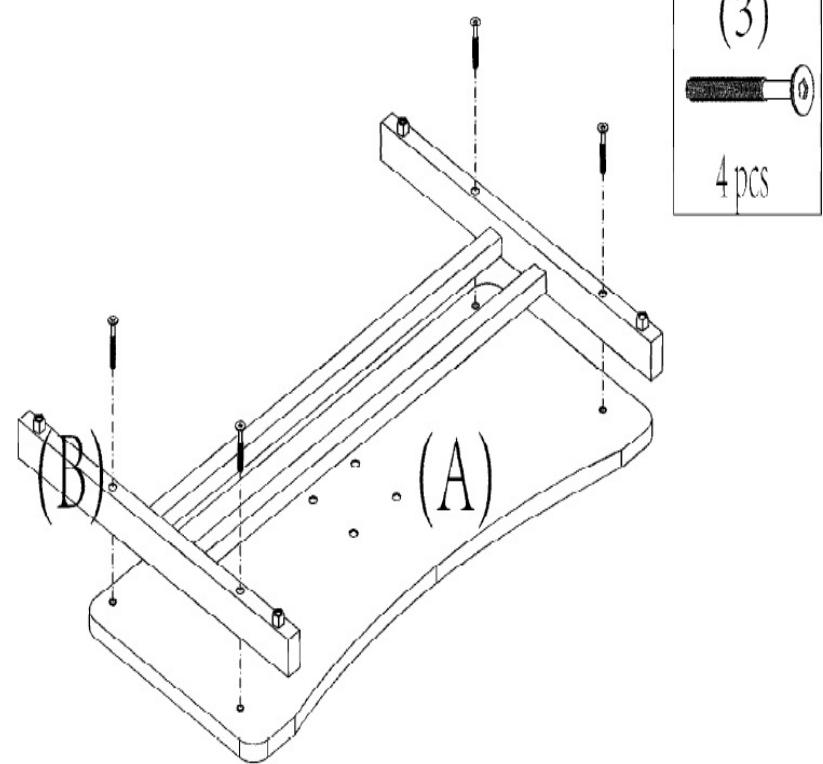

**Step 2:**

- a) Locate your four casters, two non-locking #7 and two locking #8.
- b) The two locking casters should be installed in the front of the unit. You can identify the front of the unit by noticing the rounded side of panel #A as shown in the illustration.
- c) Begin by treading the stem of the casters into the caster nuts located at each corner as shown.
- d) Use the provided open-end wrench part #11 and tighten the caster all the way so the caster stem is flush and tight to the caster nuts.

**STEP2**

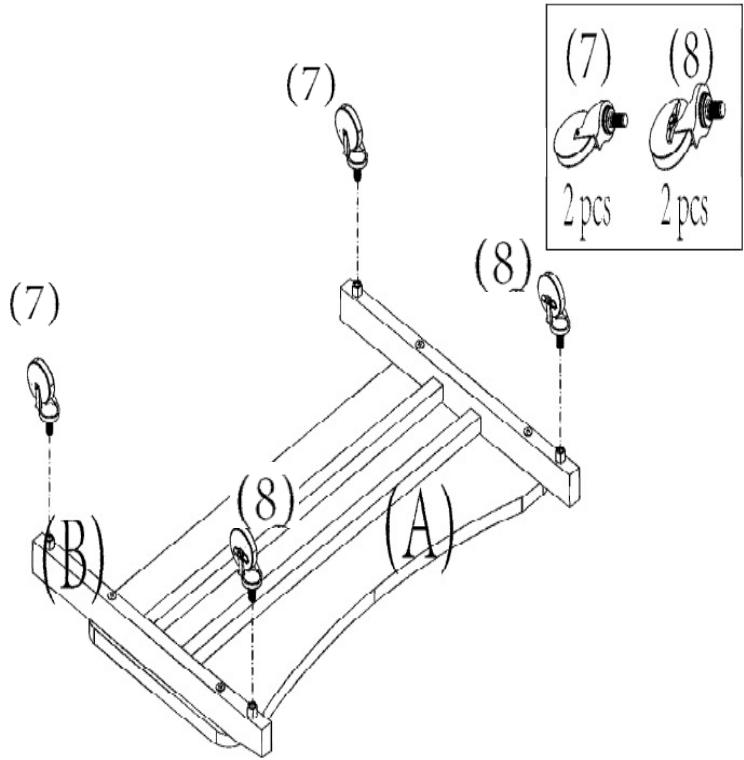




STEP3

Step 3:


- a) Turn the entire base assembly right side over with panel #A facing up as shown.
- b) Be sure to lock the two locking casters before continuing the assembly of the unit.

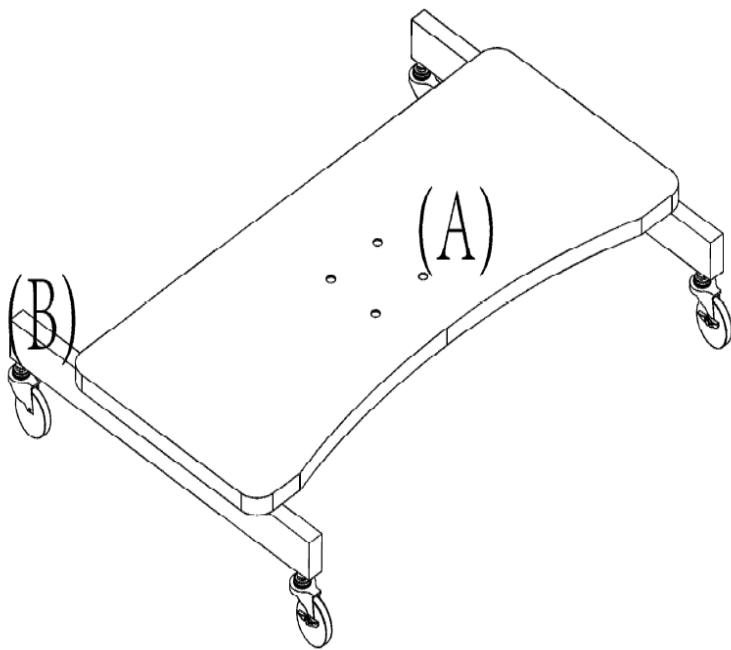

STEP4

Step 4:



- a) Locate the column part #C and make sure it is in its closed position as shown.
- b) Identify the adjustable knob, part #7 and thread it into the nut on the side of the column as shown.

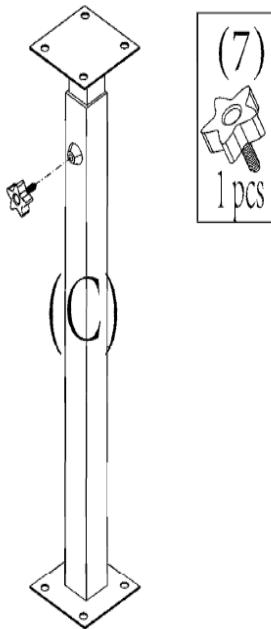

**Step 5:**

- a) Locate panel #D and lay it down on a clean, soft surface with the four holes in the middle of shelf facing upwards as shown.
- b) Turn the column #C upside down with the knob closer to the panel. Align the four holes on the column plate with the four plastic inserts embedded in panel #D
- c) Use four bolts #1 to secure the column to panel #D as shown.
- d) Use the provided hex key (hardware #10) to tighten the bolts securely so that the column is securely fastened to the panel.



**STEP5**

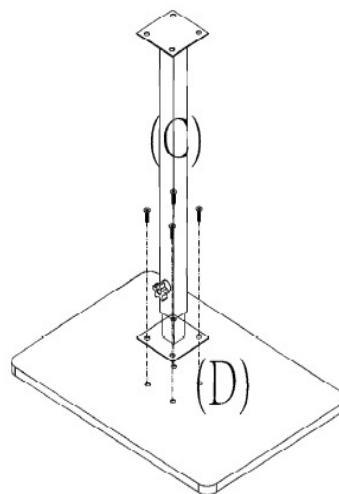

**Step 6:**

- a) Carefully turn the column and the attached panel #D over and align the four holes at the corners of the mounting plate with the four predrilled holes in the center of panel #A as shown.
- b) Use four bolts #2 to secure the column to panel A as shown.
- c) Use the provided hex key (hardware #10) to tighten the bolts securely.



**STEP6**

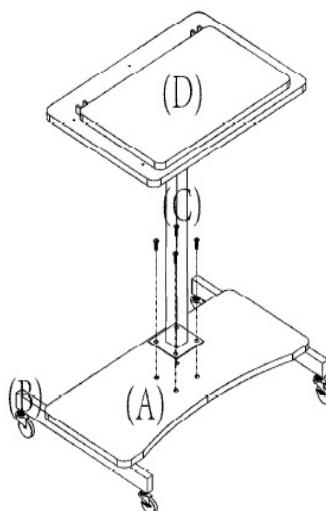

**Step 7:**


- a) Locate panel #H and the metal book stop part I.
- b) Lay panel #H on a clean, soft surface facing downwards with two inserts at the edge facing upwards as shown.
- c) Align the two holes on part #I with the two plastic inserts on panel #H as shown.
- d) Use two bolts #1 to secure the book-stopper, part #I in place.
- e) Use the provided hex key (hardware #10) to tighten the bolts securely.
- f) Place this panel on the side for a later step.

**STEP7**

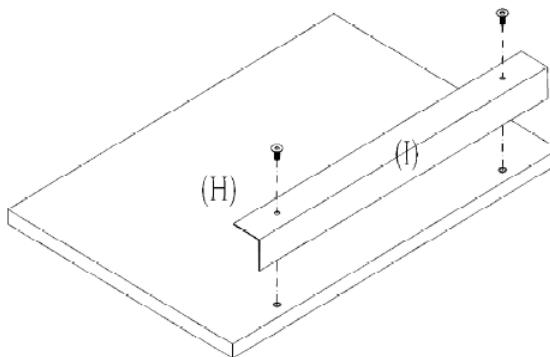



**Step 8:**

- Locate panels # F and lay it down on a clean, soft surface with the predrilled holes facing up as shown.
- Insert five cam locks part # 4 into the five holes on the panel.
- Be sure to always insert the cam locks with the arrow +/- facing the edge of the panel so the cam bolt can be inserted with ease.**
- Insert four wooden dowels, part #12, two on each end of the panel as shown.

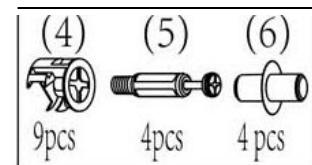


**Step 9:**

- Locate panel #E and #G and lay them down on a clean, soft surface with the holes facing upwards.
- Insert two cam locks #4 as shown in each panel.
- Install two cam bolts # 5 as shown into the pre-installed plastic inserts using a Phillips screw driver.
- Insert two part #6 in the pre drilled holes on both panels #E and #G as shown.

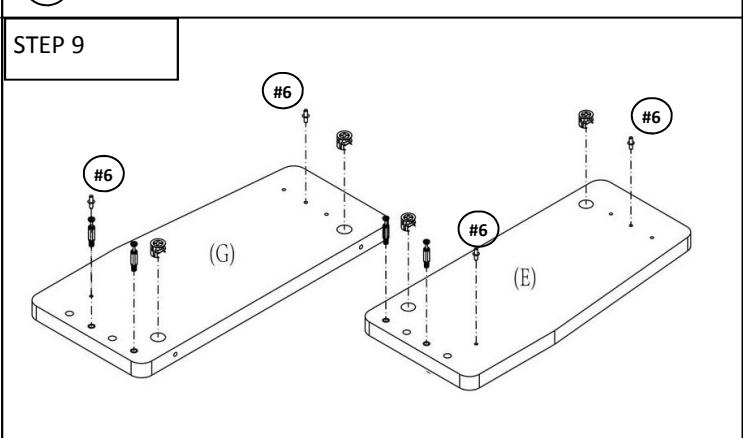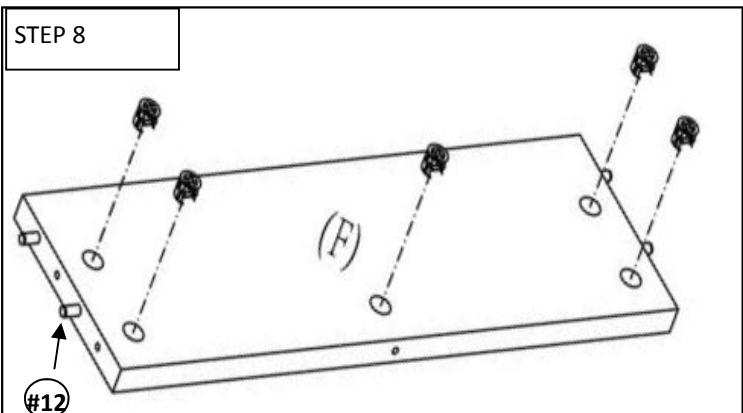

**Step 10:**

- Attach rear panel #F with right panel #G by aligning the cam bolts on panel #G with cam lock holes at the edge of panel #F.
- The dowels at the edge of panel #F should also align with holes of panel #G.
- Once aligned proceed to insert the cam bolts into the cam locks until the two panels are completely flush.
- Proceed by turning the cam locks using a Phillips screwdriver to lock the two panels together.
- Proceed by aligning the predrilled hole on the side of panel #H with the pin #6 on panel #G as shown.
- Insert panel #H as far as it goes so the shelf can turn freely on the pin.
- Lower the shelf to rest the surface on the pins on the two inner sides of panels #E and #G.

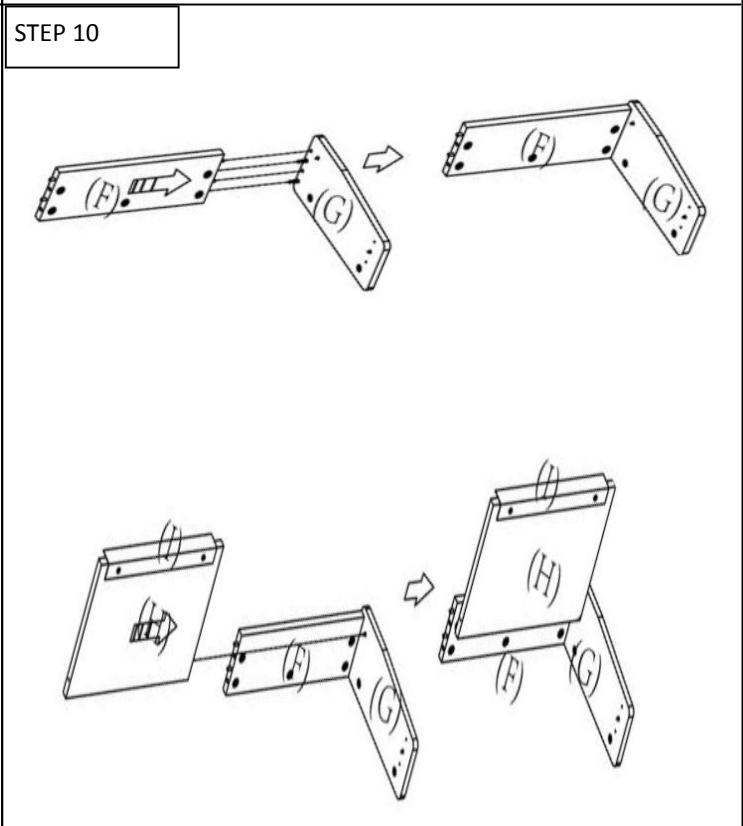

**Step 11:**




- a) Proceed to attach the left side panel #E to the other side of rear panel #F and panel #H by aligning the cam bolts on panel #E with the cam lock holes on the side of panel #F.
- b) The wooden dowels on the edge of panel #F should align with the predrilled holes on panel #E.
- c) Be sure to align the predrilled hole on the edge of the surface panel #H with the pin on panel #E as shown.
- d) Once everything is aligned proceed to gently insert the cam bolts onto the holes until all the panels are flush with each other.
- e) Proceed by turning the cam bolts using a Phillips screwdriver to lock all the panels together.

**Step 12:**


- a) Insert five cam bolts #5 into the plastics inserts on the surface of panel #D as shown. Use a Phillips screwdriver to install the cam bolts properly.

**Step 13:**

- a) Proceed by aligning the cam lock holes at the bottom of panels #E, #F and #G with the five cam bolts on panel #D.
- b) Lifting the three walls and the surface panel over panel #D and align the cam bolts with the cam locks.
- c) Once aligned gently lower the rear and side panels over the cam bolts so the cabinet wall are flush with the base panel #D as shown.
- d) Proceed by turning the cam locks using a Phillips screwdriver to lock the cabinet walls and the cabinet base together.

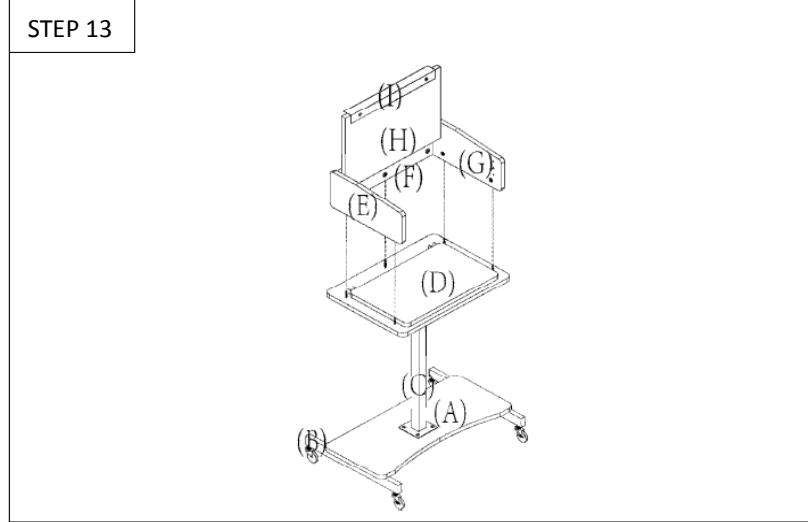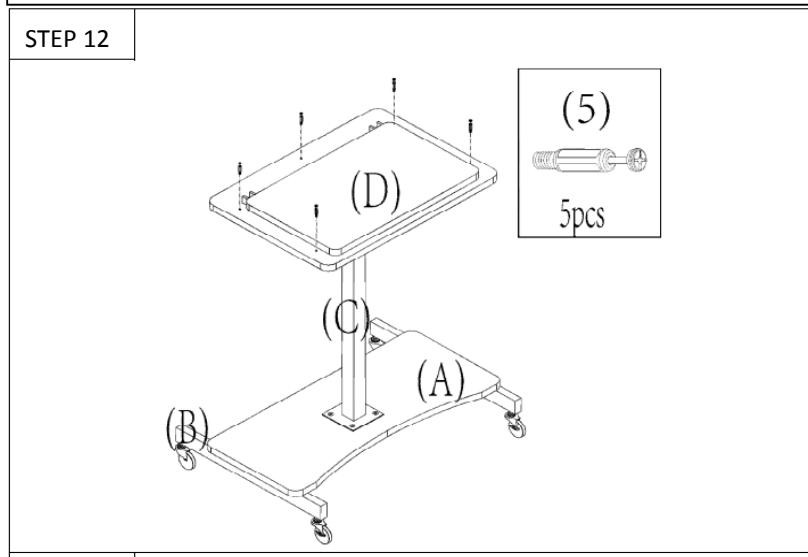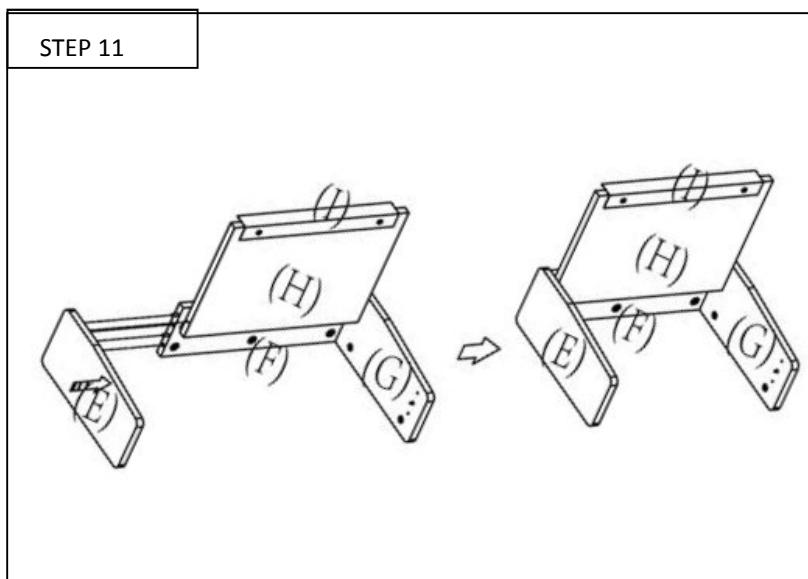

- ◆ To adjust the height of the stand loosen the knob on the column and raise the cabinet to the desired height. Tighten the knob well to secure the surface at your desired height.
- ◆ The angle of the shelf can be adjusted by adjusting height location of the pin on the inside of the two side cabinet walls.

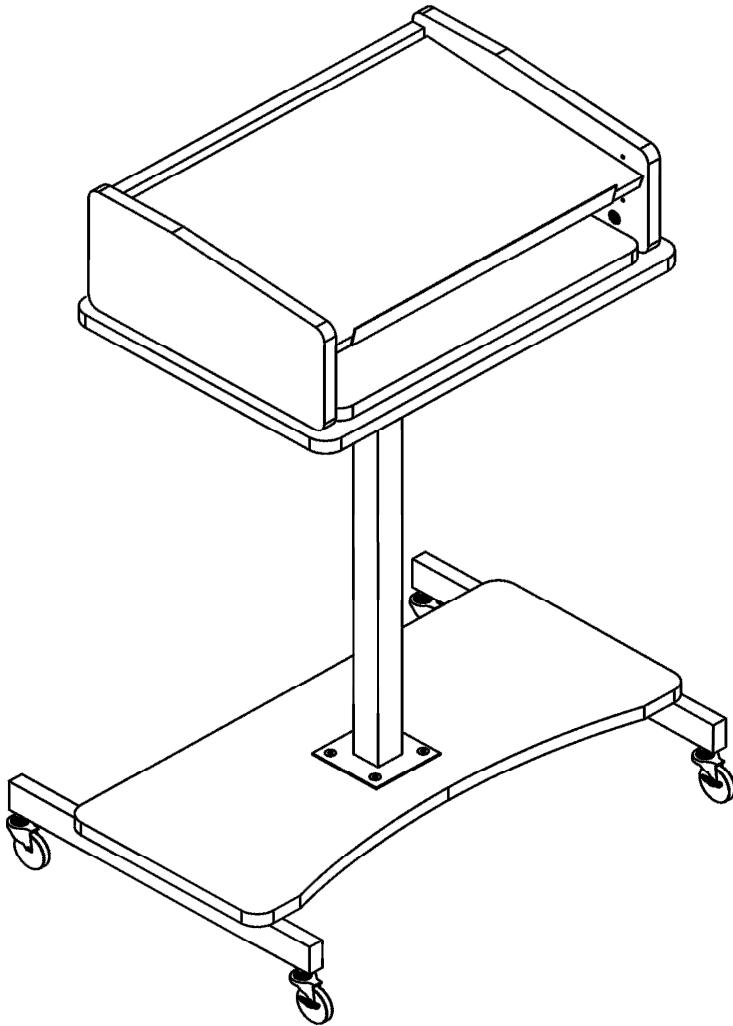

Congratulations!!! Your Laptop Speaker Stand is now completely assembled.



## Other Sound and Non-Sound Lecterns from Oklahoma Sound

Model #WZD



Model #6010



MODEL #111 PLS



Model 800X/810



Model #SCL



For these and other OS product please contact your dealer, or:

Oklahoma Sound

149 Entin Road, Clifton N.J. 07014 ◆ Tel : (973) 594-9000

[www.oklahomasound.com](http://www.oklahomasound.com) ◆ [info@oklahomasound.com](mailto:info@oklahomasound.com)