Visit www.metro.com/resources or scan the QR code for assembly videos, warranty information, cleaning guidelines and more!

Scanner ici pour visionner une vidéo de l'assemblage détaillé

Para ver un video de instrucciones detalladas sobre el montaje, escanee aquí.

ASSEMBLY AND USE INSTRUCTIONS
SLIDESECURE – SUPER ERECTA®

Save this document for application, load rating, and safety reference.





⚠ CAUTION - MAXIMUM LOAD CAPACITY

Load capacity per shelf (evenly distributed)	
Super Erecta (SES)	
800 lbs. (363 kg)	18 in. to 48 in. (457 mm to 1219 mm)
600 lbs. (272 kg)	54 in. (1370 mm) or longer

Load capacity per unit (evenly distributed)

Stationary units have a maximum load capacity (evenly distributed) of 2,000 lbs. (907 kg).

Mobile units have a maximum capacity of three times the caster load rating up to but not exceeding 1,000 lbs. (453 kg) total. Consult the Metro catalog for caster load ratings.


Failure to follow these instructions could result in personal injury or property damage.

⚠ WARNING - TIPPING HAZARD


- Do not stand or climb on shelving.
- Place heavy objects on lowest shelf.
- Distribute weight as evenly as possible.
- Do not drop heavy objects on shelves or subject units to shock such as forklifts or dollies.
- Move mobile units along long axis only. ()
- Shelves should be assembled with a maximum spacing of 30 in. (76cm). Additional accessories (i.e. 3-sided double snake frames) may be used in lieu of shelves to safely support the shelving unit.
- Place shelving on solid and level floors. Level the unit by adjusting the leveling feet.
- Install bottom shelf as low as possible.
- For 18 in. (457mm) deep Security Units, use casters no larger than 5 in. diameter.

TWO PEOPLE REQUIRED TO ASSEMBLE UNIT


Security Components

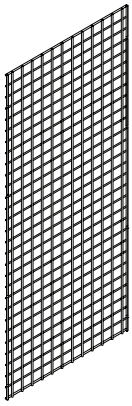


Back Panels **(2)**



End Panels **(2)**




*Left Door Panel




*Right Door Panel


Left and Right Rail Mount Set with Hardware



LH Rail Mount **(x1)**




RH Rail Mount **(x1)**




#10-24 Flat Head Screw **(x8)**




Bushings **(x16)**




Upper Back Plate with long studs **(x1)**



Middle Back Plate with short studs **(x1)**




Lower Back Plate with short studs **(x1)**

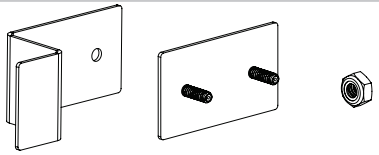

Side Clamps with #10-24 hex nuts **(x2)**

Rail Kit



Slide Rail Assy (**x1**)



Bottom Channel Assy (**x1**)




#10-24 Button Head Security Screw **(x2)**



Mounting Plate (**x2**)



#1/4-20 Acorn Nut (**x2**)




Top Shroud Cover **(x1)**



#1/4-20 Screw (**x2**)



Security Bracket (**x2**)



Post **(x4)**


Optional:



Brake Caster **(x2)**



Swivel Caster **(x2)**

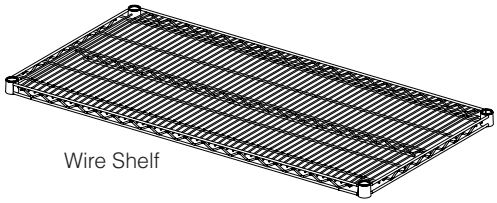

Wire Shelf

Tool Required

3/8 in. and 7/16 in. wrench




Phillips Head Screw Driver





Security Allen Key (Provided)




Rubber Mallet



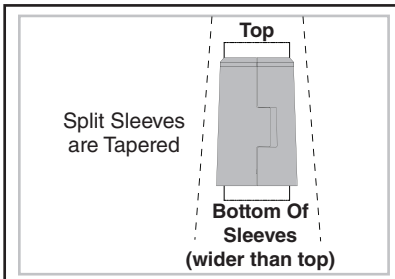

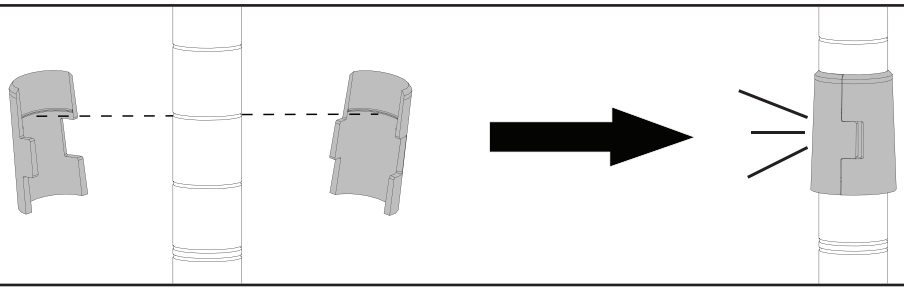


Stem Caster Installation

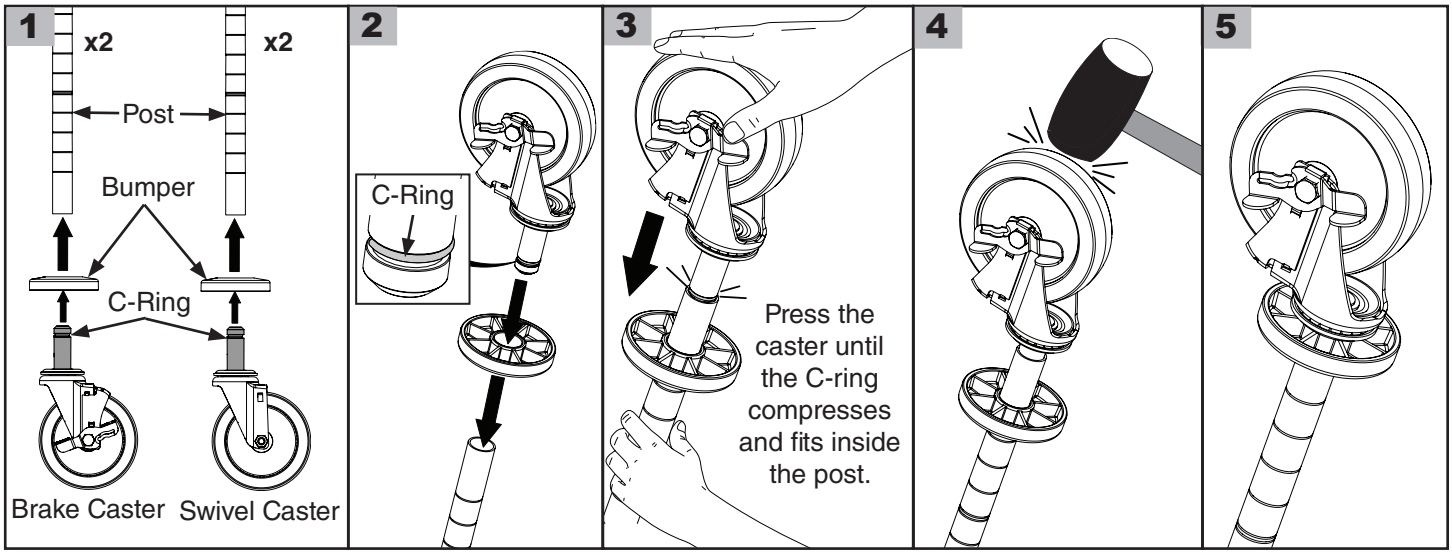


Shelf Installation

1 Bottom Shelf Placement


Maintain at least 6" (152mm) of clearance between the floor and the lowest shelf for proper cleaning.

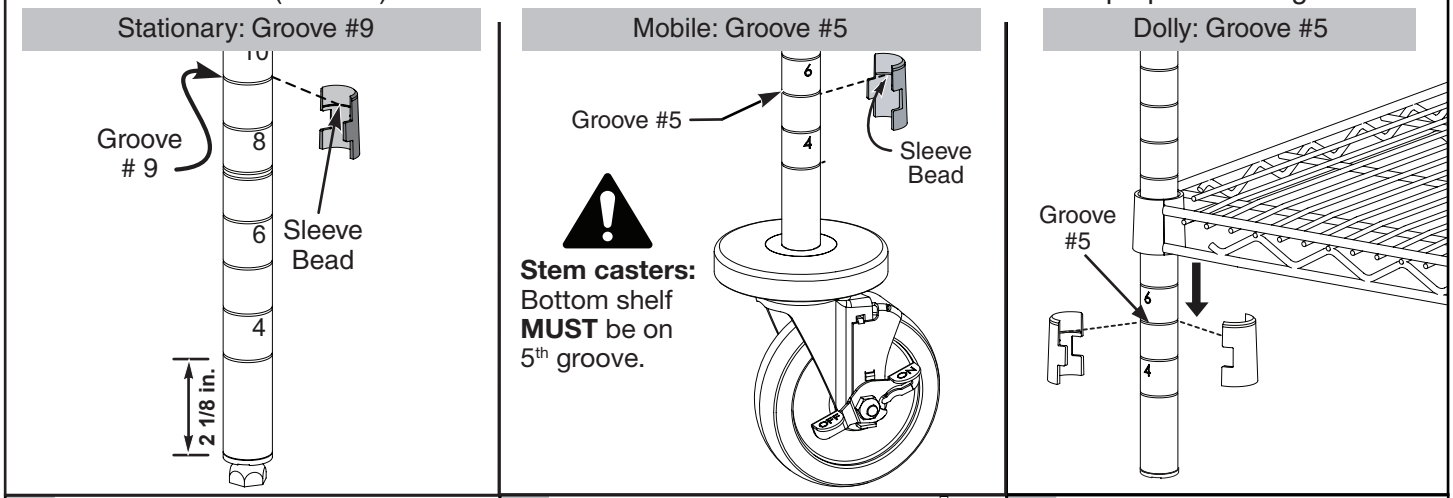

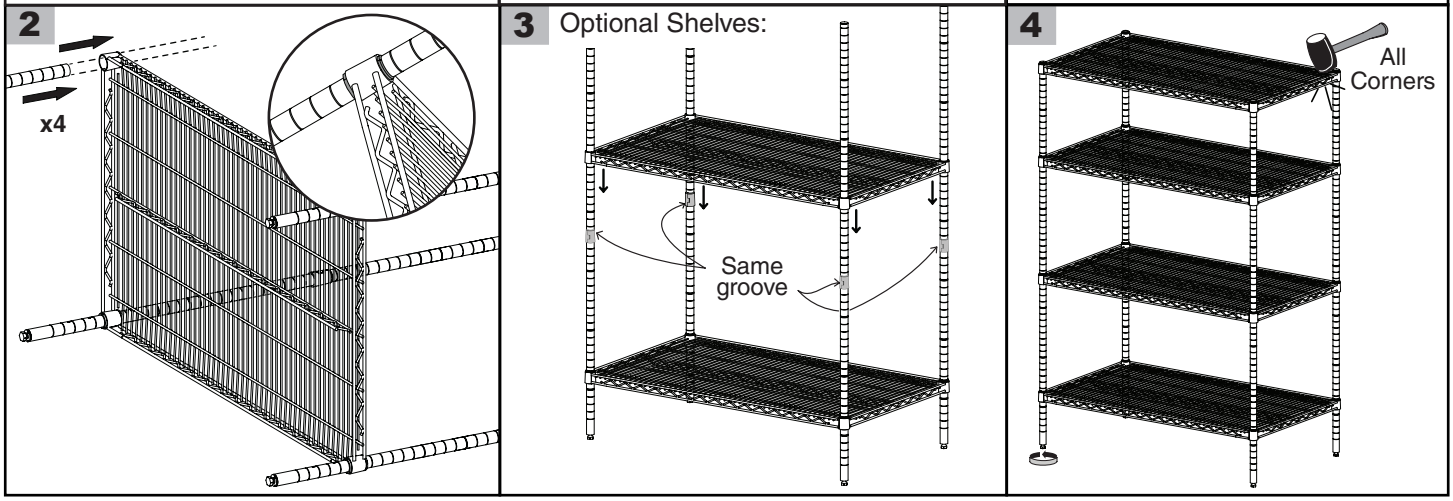


Security Cage Assembly

1

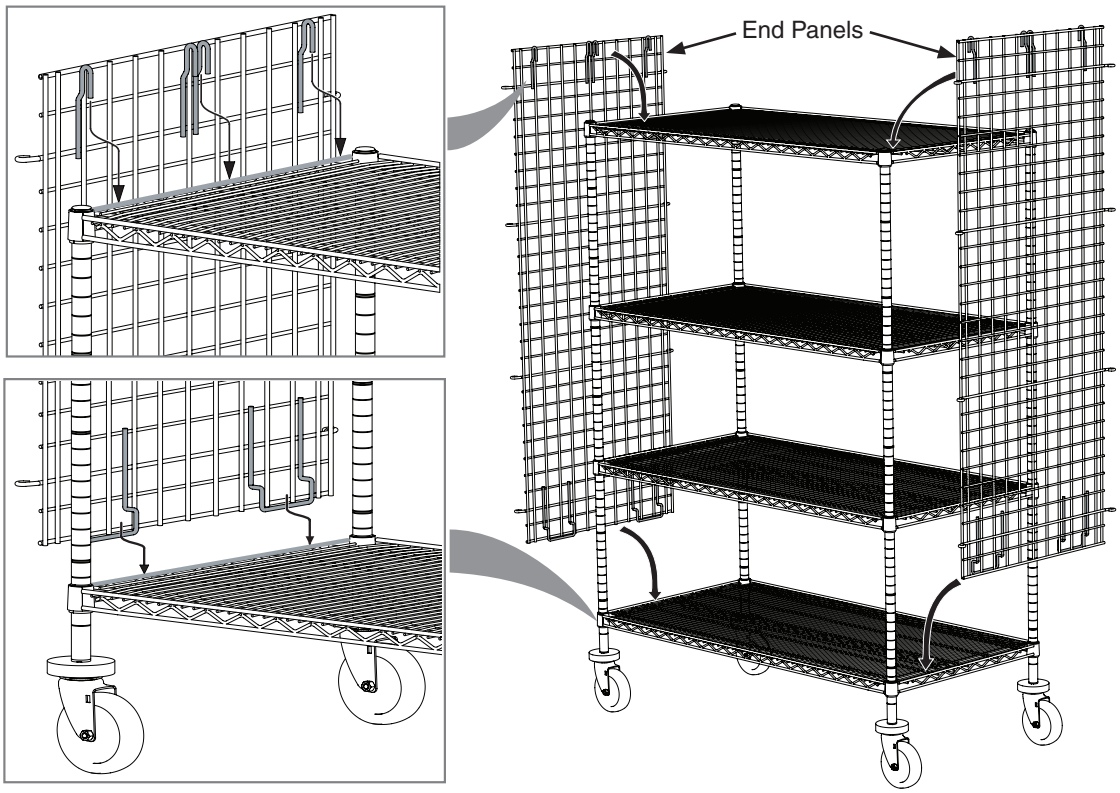

2

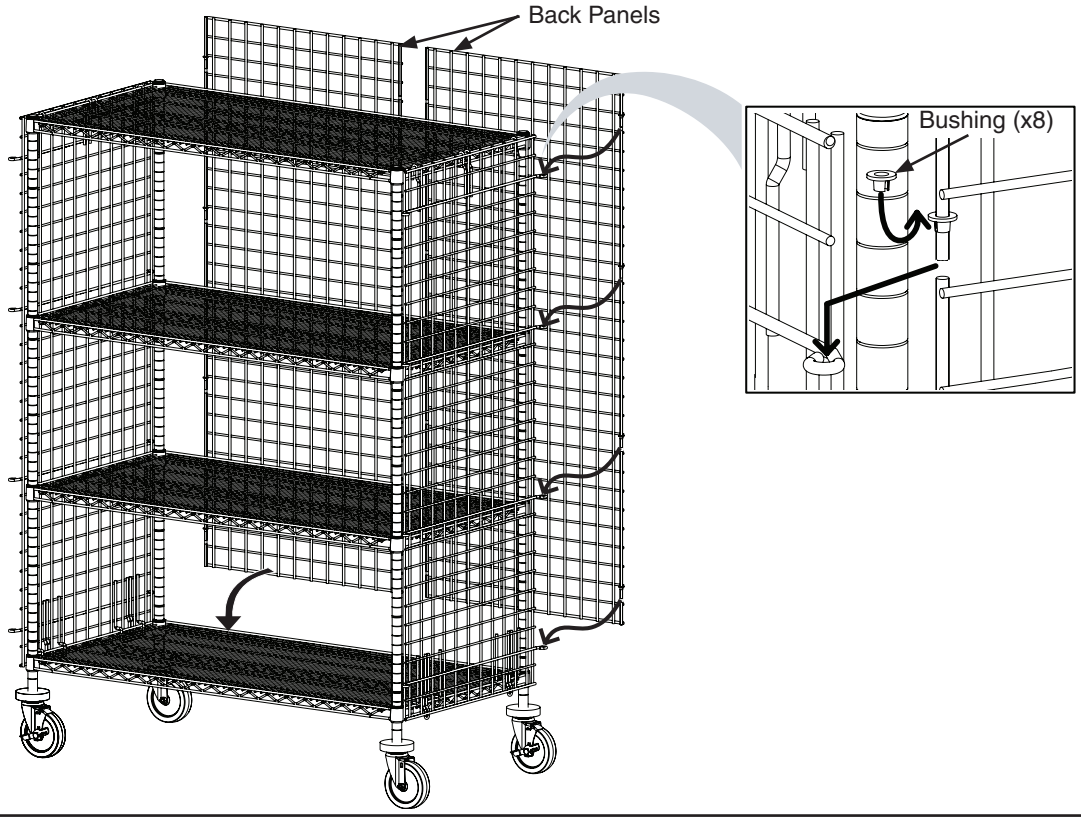

3


3/8 in. wrench




Upper Back Plate with long studs and #10-24 Hex Nuts

Middle Back Plate with short studs and #10-24 Hex Nuts

Lower Back Plate with short studs and #10-24 Hex Nuts

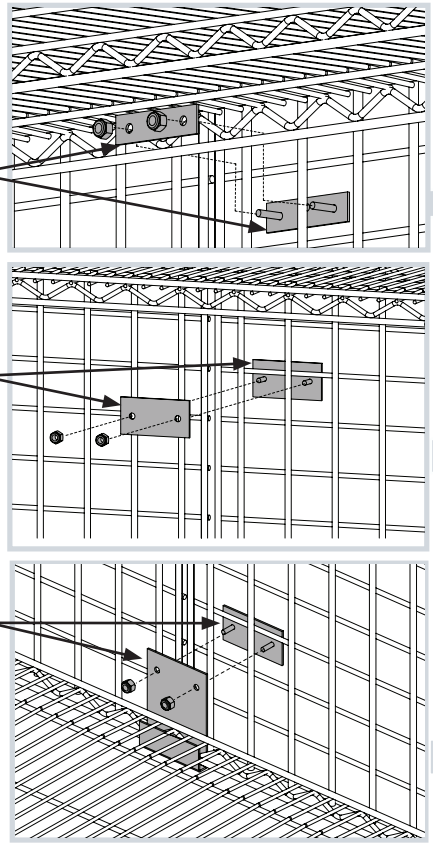

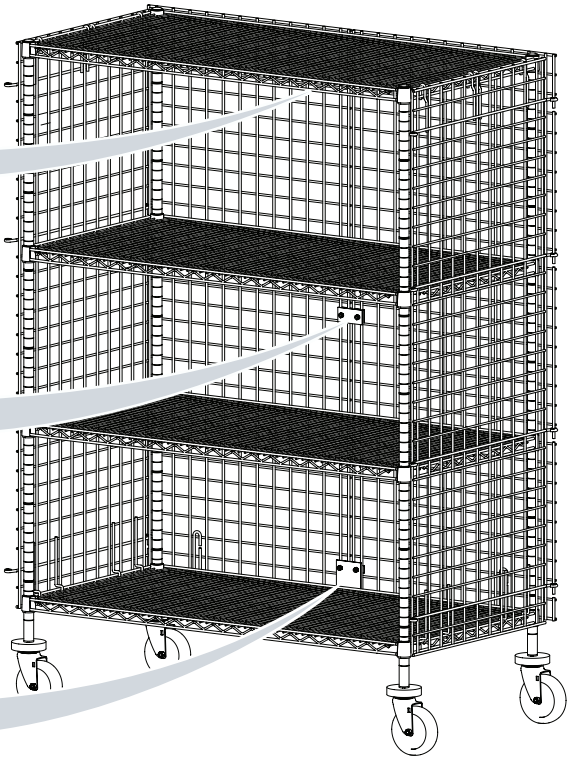

4


3/8 in. wrench



Outside Clamp

Inside Clamp **x2**

#10-24 Hex Nut

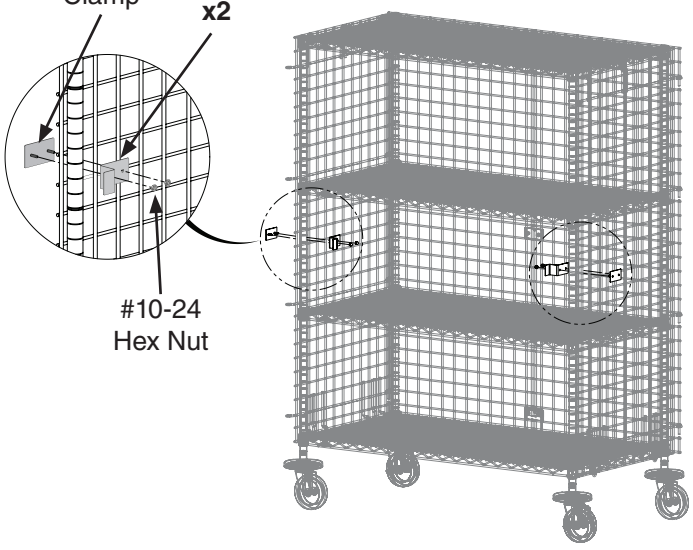


5


Secure At The Highest Groove Under the Shelf

Rail Mount **x2**


#10-24 Flat Head Screw

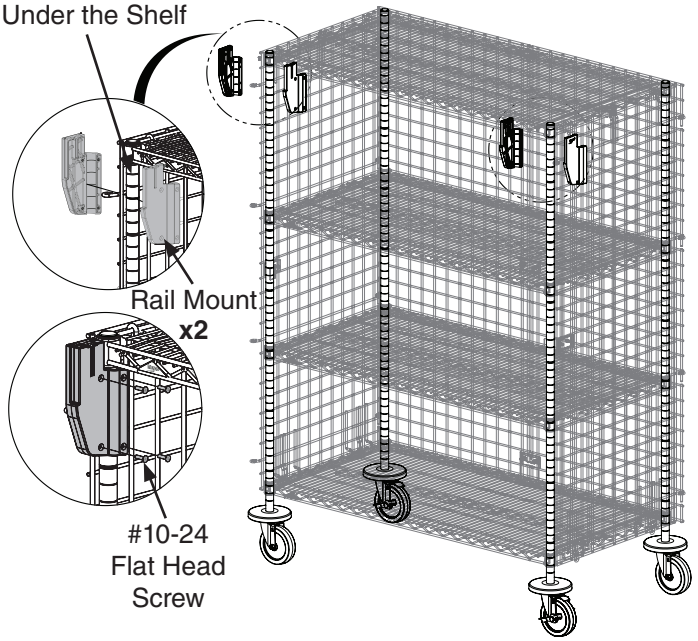


6 Lift & Place the Slide Rail Assy In Position.

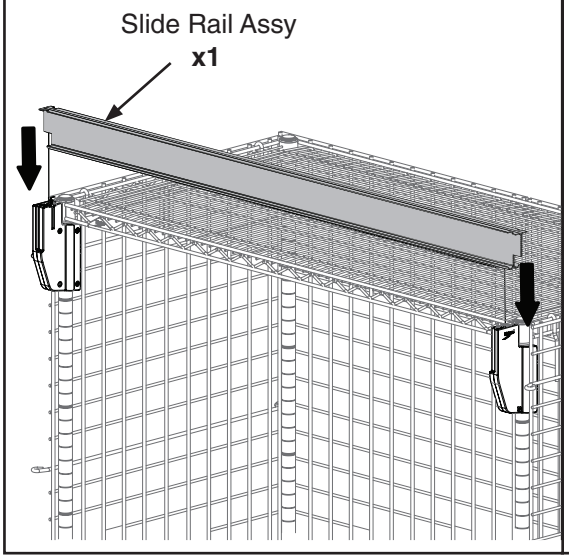


7 Tilt the left door approximately 20 degrees and rest the door rollers on the rear channel of the top rail.

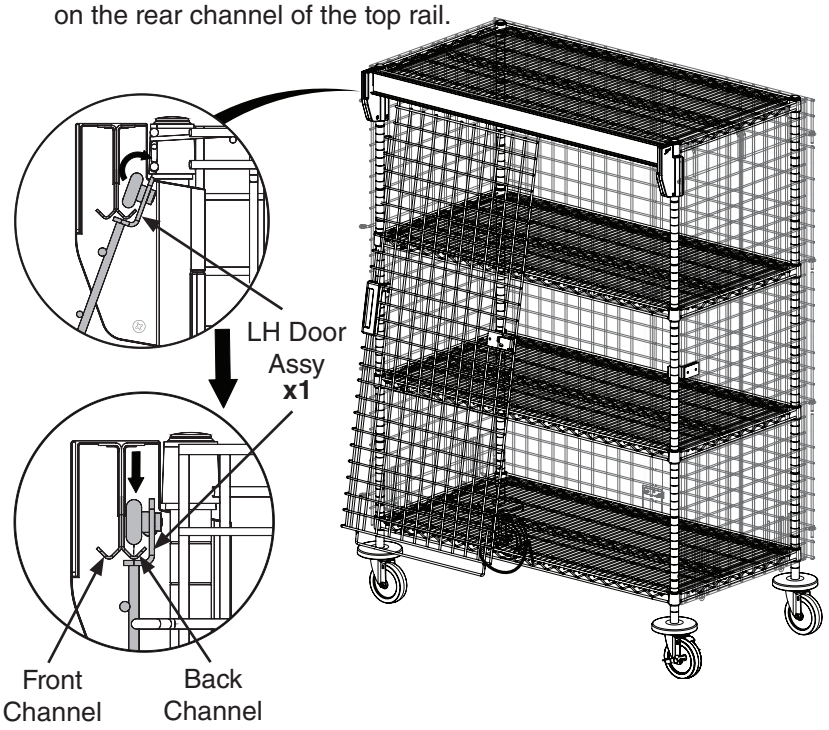


8

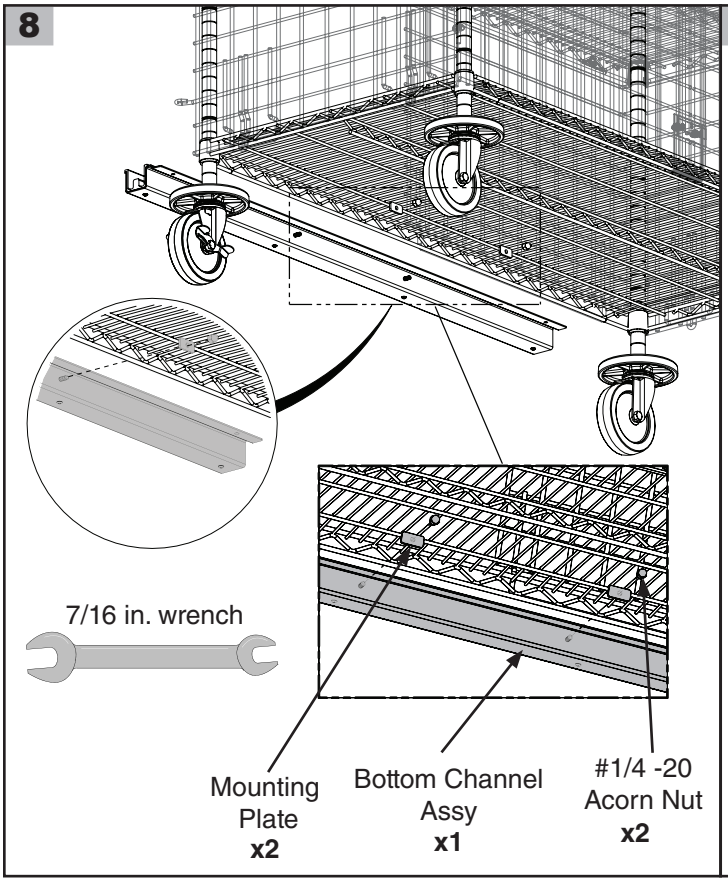


9

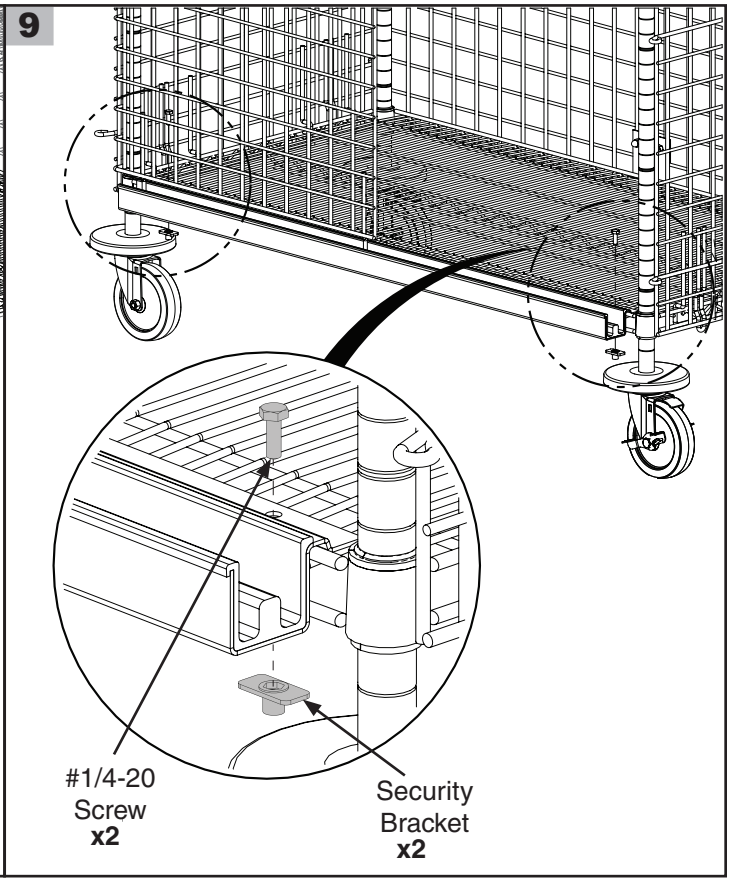


10

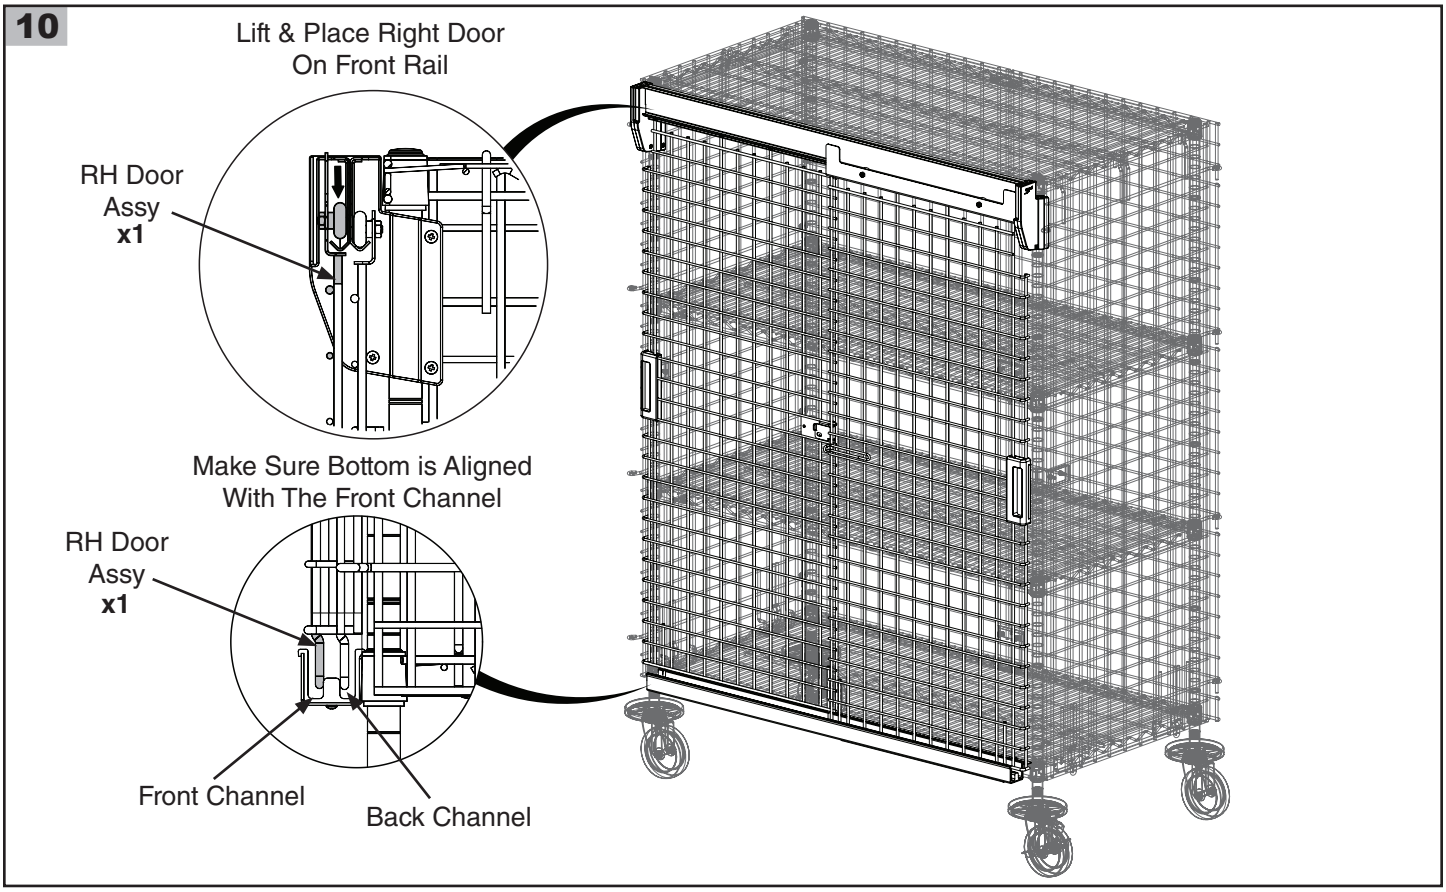
Lift & Place Right Door
On Front Rail
RH Door
Assy
x1
Make Sure Bottom is Aligned
With The Front Channel
RH Door
Assy
x1
Front Channel
Back Channel


11

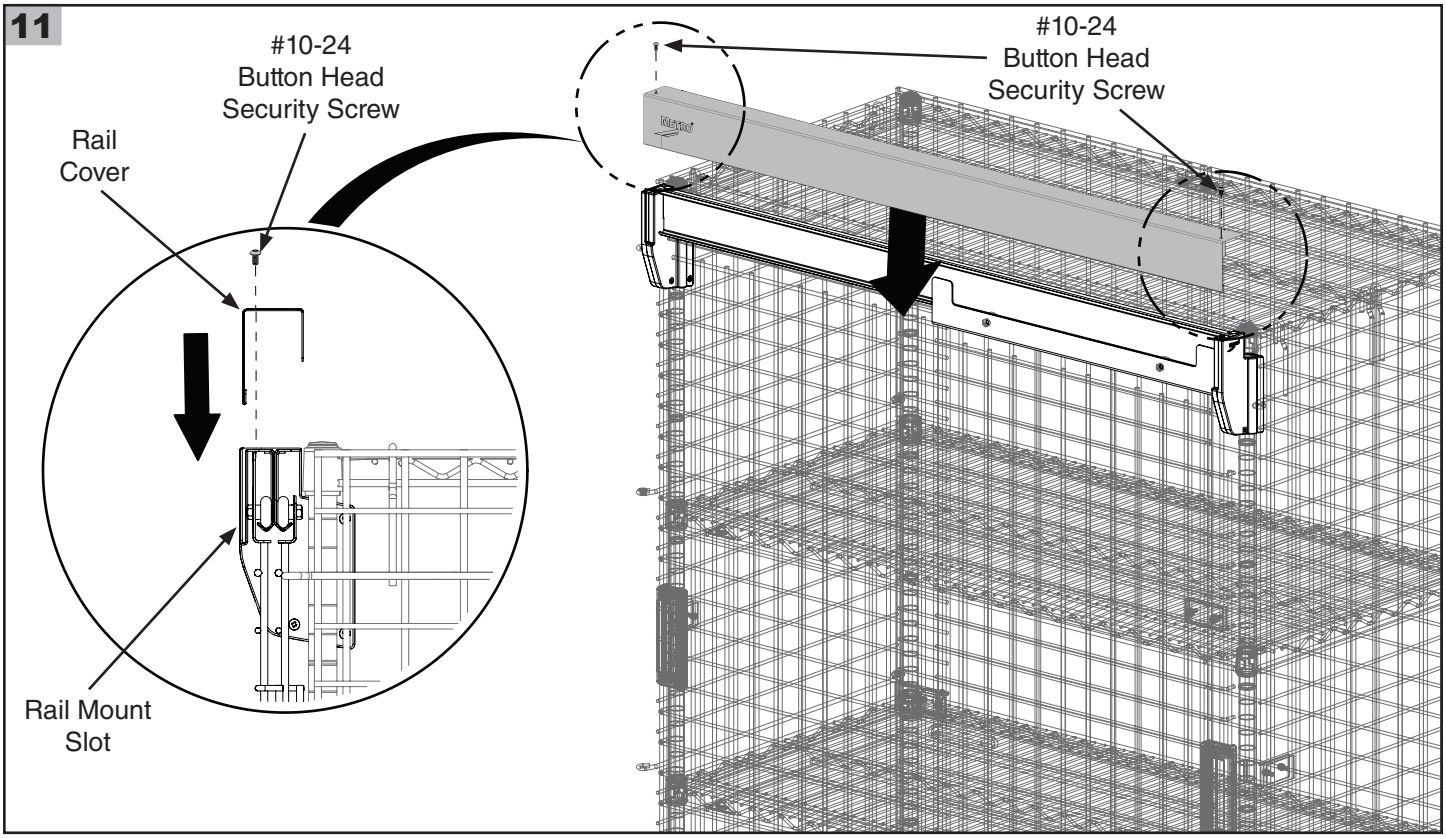
#10-24
Button Head
Security Screw
Rail
Cover
#10-24
Button Head
Security Screw
Rail Mount
Slot

Door locking operation

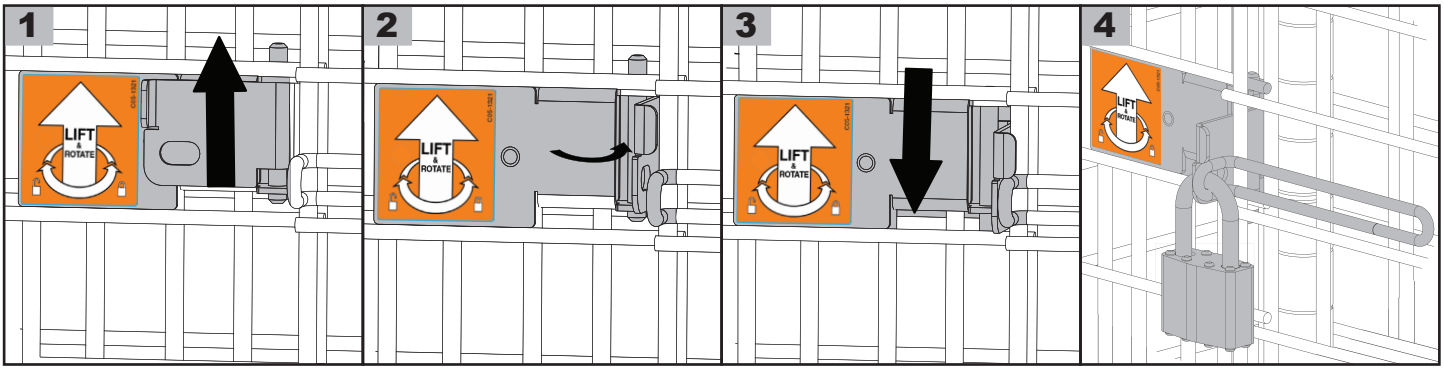


Door unlocking operation

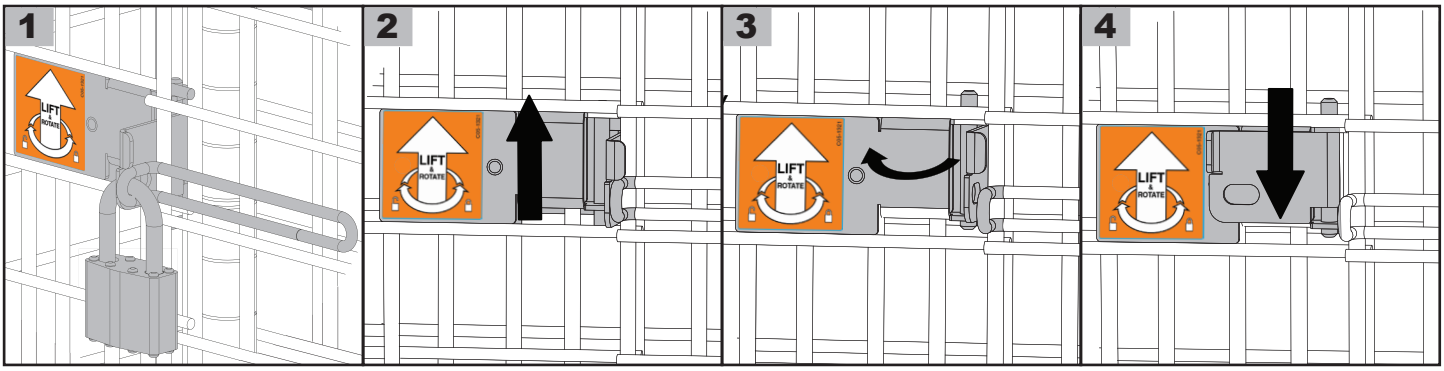

⚠ CAUTION - PINCH POINT



Always use handles to open and close the doors.

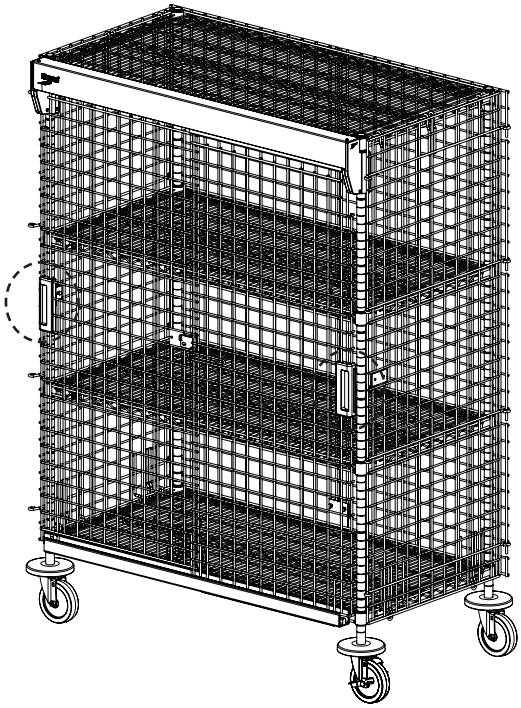

© 2025 InterMetro Industries Corporation, Wilkes-Barre, PA 18705
L01-701 REV 09/25

METRO®
We put space to work.

Ali GROUP

WELBILT
an Ali Group Company