



**CONTRACTOR
LIGHTING & SUPPLY**
WWW.CONTRACTORLIGHTING.COM

PROJECT
TYPE
CATALOG #

NEW YORK CITY APPROVED EMERGENCY LIGHT

City of New York approved heavy-duty emergency lighting unit is efficient and easy to install. It is completely self-contained and fully automatic. They are available in 2 and 3 headed configurations are all 20 gage steel and have several different voltages and wattages available.



FEATURES

- Front access panel is hinged for trouble-free installation.
- Universal mounting pattern and conduit knockouts allow for easy installation.
- Front, top or side mounted heads
- Capable of powering multiple remote heads
- Stamped conduit knockouts standard on all units
- White powder coat finish
- Custom colors available

ELECTRONICS

- Fully automatic current limited pulse switching charger
- Line-latch prevents unnecessary discharge of battery
- Temperature compensated components in the circuitry
- Brownout and short circuit protection
- Dual diagnostic LED display which indicates AC/ON and High Charge
- Push-to-test switch/120 or 277 field-selectable inputs


CONSTRUCTION

- Durable 20-gauge steel cabinet finished in a white powder coat.

APPROVALS

- Certified by ETL or CSA to UL924 standard.

DIMENSIONS

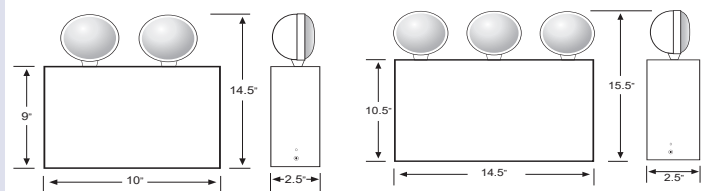

BATTERY

- Maintenance-free, sealed lead calcium battery.
- Nickel Cadmium battery available.

LAMPS

- Standard lamp heads are Par 36 Style
- Par 18 style and MR16 lamps available.

Lamp Selection	6 Volt	12 Volt
Standard	3.6, 5.4W, 7.2W, 9W	9W, 18W
Halogen	H8W, H10W, H12W, H20W	H6W, H8W, H12W, H12W, H20W
Sealed Beam	SB8W, SB9W, SB12W, SB18W, SB25W	SB8W, SB12W, SB18W, SB25W
Sealed Beam Halogen	SBH12W, SBH20W	SBH8W

ORDERING INFORMATION

MODEL	VOLTS	WATTS	HEADS	HEAD MOUNTING	LAMPS	OPTIONS	
02-NYE	6 = 6 Volt 12 = 12 Volt	12 = 12 (6v) 18 = 18 (6v) 27 = 27 (6v) 50 = 50 (6v, 12v)	0 = 0 Head 1 = 1 Head 2 = 2 Heads 3 = 3 Heads	TM = Top Mount SM = Side Mount FM = Front Mount	See Lamp Selection Above	V = Voltmeter A = Ammeter NC = NiCad TP = Tamper Proof Screws C = Custom Color	FP = Food Prep Lens MH = Metal Heads CS = Cord Set P18 = Par 18 Heads MR16 = MR16 Heads