
MAINTENANCE LADDER, PERFORATED - LAD-MM-3-P-YL APPROX WEIGHT: 89.03 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PAIN *** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE ***

APPROX WEIGHT: 89.03 lbs. DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

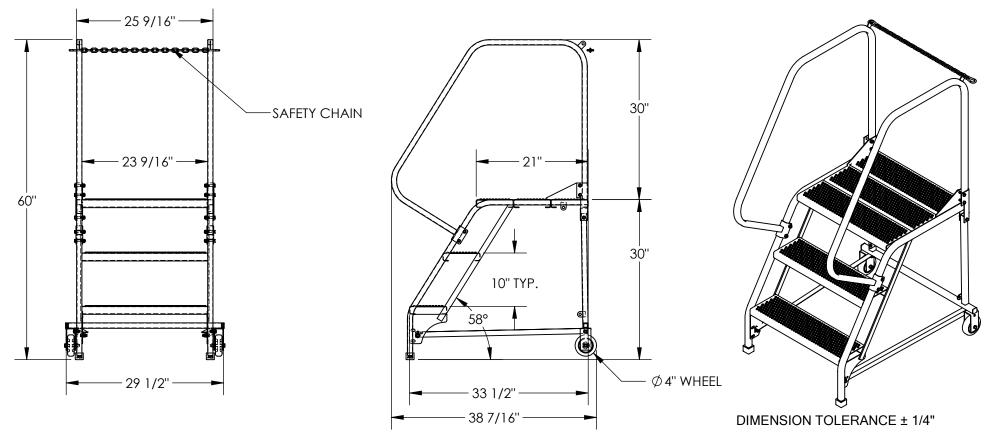

STANDARD FEATURES

MODEL NUMBER IS LAD-MM-3-P-YL **OVERALL WIDTH IS 29 1/2"** USABLE WIDTH IS 23 9/16" **OVERALL LENGTH IS 38 7/16" USABLE LENGTH IS 33 1/2" OVERALL HEIGHT IS 60"** PLATFORM HEIGHT IS 30" TOUGH BAKED IN POWDER COATED YELLOW FINISH

STEP TYPE: PERFORATED STEPS CLIMB ANGLE: 58°

STEP DIM. 24" X 7" MAX CAPACITY IS 350 LBS

SPECIAL FEATURES

NONE

NOTE

- -SOME ASSEMBLY REQUIRED
- -TOOL TRAY SOLD SEPERATELY

		L		
FOR INTERNAL USE ONLY PROJECT SIGN OFF				
SALES				
ENG.				
FAB.		R		
POWER		G		

Α

Ρ

Ρ

R

0

V

Α

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ANY MODIFIED UNITS ARE NON-RETURNABLE [] As drawn

[] As marked

Signed:

Printed Name:

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

1	DISTRIBUTOR'S NAME:	P.O.# X		
	VESTIL MANUFAC	W.O.# X		
	DRAWN BY: JWW	DATE: 5/1	8/2020	SALES: X
	reference: X		SCALE: 1:18	FILE NAME:
	QUOTED LEAD TIME: X	QUOTE #		44-007-369-001