# TRNGO espresso from LINE SUPER AUTOMATIC

# installation checklist

PRODUCT CODE: TUNO



#### **Quick Reference Specifications**

Dimensions: 33"(H)X 23.0"(L)X 17.6"(W)


Weight: 168.7 lbs (full)

Electrical Requirements: Volts: 208-240/Watts: 6120/Amps: 30 Plumbing Requirements: Flow: 30GPH (minimum) Pressure: 20psi (minimum) Hardness: 3 GPG (maximum) 1/2" NPT Male w/shut off

Drainage Requirements: Open gravity drain of 1.25" ID (min) within 4 feet

of machine

The following information will assist you in preparing your location for the installation of your equipment. Please make sure everything is prepared to these specifications prior to scheduling your installation. Once everything is complete, check the appropriate boxes and sign the bottom of the form.

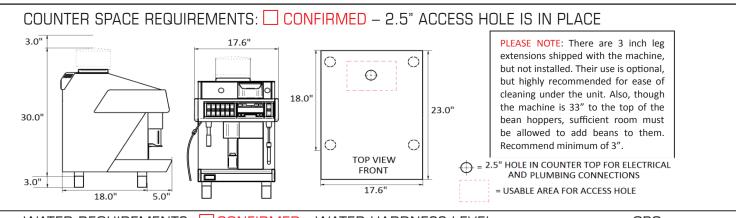

WATER REQUIREMENTS : CONFIRMED - WATER HARDNESS LEVEL

\_GPG

 $^*$ Machine must be supplied with a minimum of 30 Gallons per hour @ 20 PSI.



- \*Example of appropriate supply fitting, see example at left 1/2" NPT Male w/shut off.
- \*If water hardness levels exceed 3 GPG (Grains per Gallon) a water softener MUST be installed. Exceeding these levels will void the manufacturer's warranty. (Check appropriate box below)
- $\square$  I have tested the water hardness and it is 3 GPG or less (see above).
- $\square$  I already have a suitable water softener and its output is 3 GPG or less (see above).
- ☐ I have tested the water hardness level and it is written above. Please supply me with the appropriate water softener at time of installation.

## ELECTRICAL REQUIREMENTS: CONFIRMED

208-240V/30AMP/6500WATT Dedicated 30 AMP Plug within 4 feet of installation location. PLEASE NOTE: The machine will not be supplied with a Cord Cap

(Male plug). The outlet to the right is recommended.



### DRAINAGE REQUIREMENTS: CONFIRMED

Access to open gravity drain no smaller than 1.25" ID (Inner Diameter). Drain MUST be within 4 feet of the machine for proper drainage.

By signing below, I am confirming that all installation requirements have been met. I also understand that if all the requirements have not been met, I may be subject to additional installation and travel charges beyond the original estimate.



