



HEARTHBAKE SERIES COUNTERTOP ELECTRIC OVENS

SERIES: P46S & P46BL



Bakers Pride® P46 series ovens feature two baking chambers: an upper chamber with two decks that is great for pizza, pretzels, and flatbreads and a taller lower chamber with one deck for baking or roasting.

This series is available with your choice of Cordierite or brick-lined with Cordierite. The brick-lined model offers the benefit of an added Cordierite ceiling, which increases temperatures and recovery times. They may be easily installed at the factory or in the field.

The two baking chambers also independently controlled, featuring a 284–680°F thermostat and 15-minute timer in the top chamber and a 140–550°F thermostat and 60-minute timer in the bottom chamber. This series comes standard with stainless steel exterior and 4" adjustable legs. International voltages available.

FEATURES AT A GLANCE

- 208 V or 220/240 V @ 5750 watts, single or three phase
- Two baking chambers
- Upper chamber: 7" (178 mm) or 7.5" (191 mm) deck height
- Lower chamber: 2.75" (70 mm) or 3.25" (83 mm) deck height
- Three 20.75" (527 mm) sq. decks
- Cordierite or brick-lined
- 60-minute, electric timer (bottom chamber) with continuous ring-alarm and manual shut-off
- 15-minute, electric timer (top chamber) with continuous ring-alarm and manual shut-off
- 284–680°F (140–360°C) (top chamber) and 140–550°F (60–288°C) (bottom chamber) temperature range
- All stainless steel exterior
- High-heat, fully welded, aluminized steel baking chamber
- Fully insulated
- 6' (1829 mm) cord and plug on single-phase units
- 4" (102 mm) adjustable legs
- One-year limited warranty

OPTIONS & ACCESSORIES


- Stainless steel stand (with or without casters)
- International voltages
- Stacking kits
- Steel decks
- Glass window in door
- Lightstone decks
- Brick-lined conversion kit (standard on P46BL)



HEARTHBAKE SERIES COUNTERTOP ELECTRIC OVENS

SERIES: P46S & P46BL

EQUIPMENT DIMENSIONS

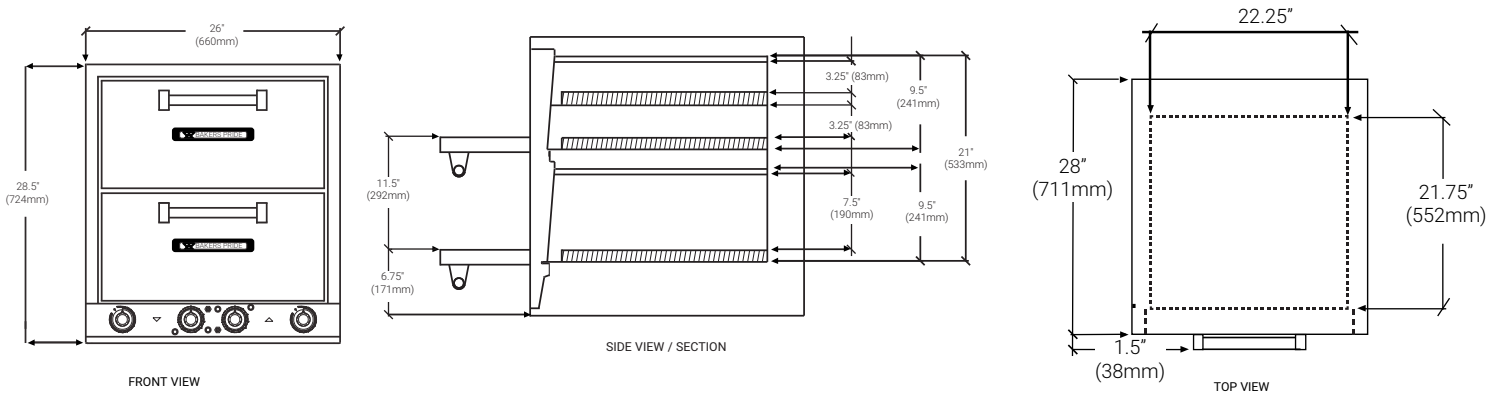


MECHANICAL SPECIFICATIONS

Model #	Overall Dim (W x H x D)*	Deck Height	Deck Size (W x D)	Decks	Baking Chambers	Thermostat Range	Carton Dim (W x H x D)	Cubic Feet	Cubic Meter	Ship Wt.
P46S	26" x 28.5" x 28" (660 x 724 x 711)	3.25" (83) & 7.5" (191)	20.75" x 20.75" (527 x 527)	3	2	284°-680°F (140-360°C)	30" x 32" x 32" (762 x 813 x 813)	17.7	.51	309 (140kg)
P46BL	26" x 28.5" x 28" (660 x 724 x 711)	2.75" (70) & 7" (178)	20.75" x 20.75" (527 x 527)	3	2	140°-550°F (60-288°C)	30" x 32" x 32" (762 x 813 x 813)	17.7	.51	325 (148kg)

*Height excludes legs

POWER SUPPLY

Model #	Watts	Voltage	Phase	Amps	Plug Style			
					USA	Canada	UK	Europe
P46S	5750	208	1, 3	27.6, 20.3	6-30P	6-50P		
		220/240	1, 3	25.0, 18.7				



REQUIRED CLEARANCES

- Left 3" (76 mm)
- Right 3" (76 mm)
- Back 3" (76 mm)

In European Community Countries and North America. In NON-COMBUSTIBLE locations only.

In European Community Countries only in COMBUSTIBLE locations. NOT for North America.

Bakers Pride Oven Company, LLC is a wholly owned subsidiary of Standex International Corporation.

Bakers Pride reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.



Freight Class: 110
FOB: Allen, 75013

11.13.2017

