



A JohnsonDiversey Company



**CMA-44L**  
Chemical Sanitizing  
44" Conveyor  
Dishwasher

Item. # \_\_\_\_\_


Spec. # \_\_\_\_\_



Optional motor cover

**FEATURES:**

- 242 racks / 968 covers per hour.
- Economical to operate. Uses only .8 gallons of water per cycle.
- Unique 3-stage washing process provides pre-wash, power wash and final rinse all in a 44" machine.
- Automatic soil purging system filters wash water and traps plate debris into an external tray. Tray can be easily removed for dumping contents.
- Heavy duty 12 and 14 gauge 304 stainless steel construction offers durable performance and years of trouble free operation.
- Built-in chemical resistant industrial 10kW heater is proven to be more durable than commercial style heaters.
- Large 19" high opening accommodates larger items and utensils.
- Auto start/stop makes operation safe and easy.
- Includes table limit switch and rack saver arm that protect the machine, dishracks and dishtable from damage.
- Three speed settings available for optimum cleaning performance.



Rack saver arm protects the machine, dishracks and table from damage.



3-stage washing process provides pre-wash, power wash and final rinse all in a 44" machine.



Top mounted controls include easy to read temperature gauges and complete operating instructions.



Shown with optional corner feed table. Available right or left.




Large 19" high opening accommodates larger items and utensils.

AIA # \_\_\_\_\_

JohnsonDiversey

Spec. #

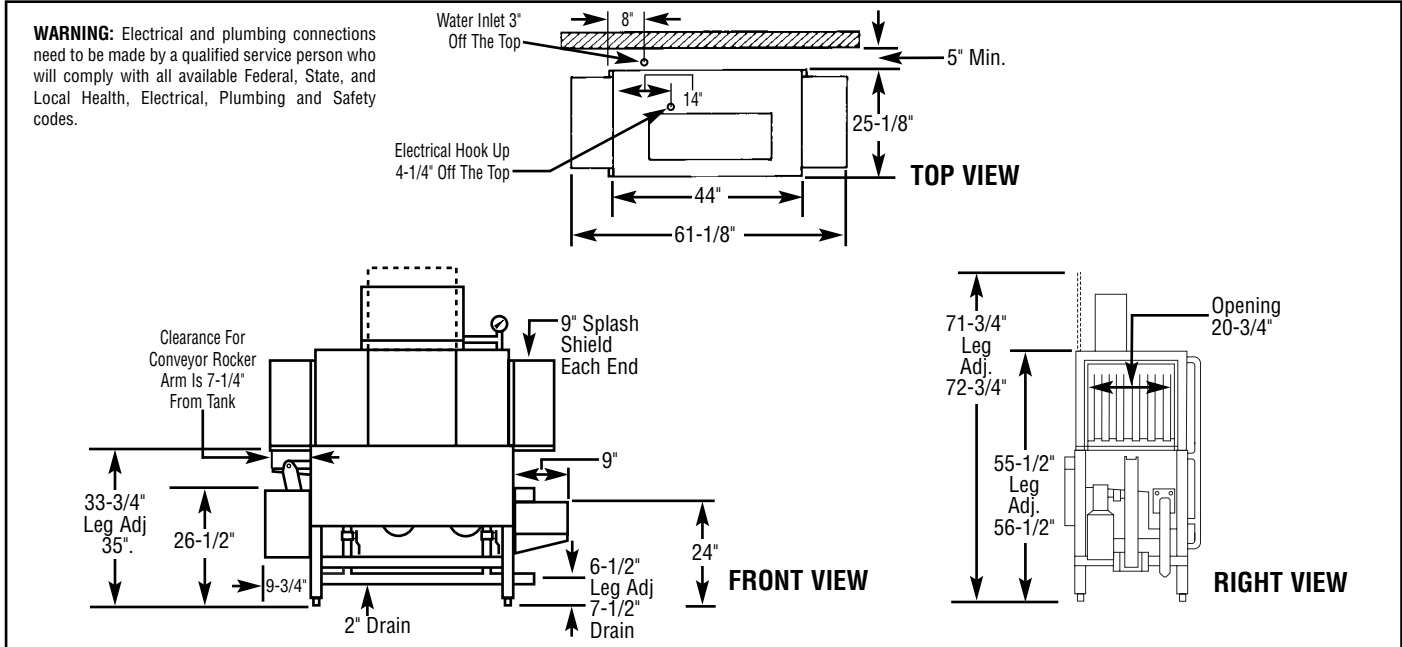

**Specifications:**

MODEL CMA-44L	USA	METRIC	USA	METRIC
<b>OPERATING CAPACITY</b>				
RACKS PER HOUR (NSF RATED)	242	242		
<b>CONVEYOR SPEED</b>	6.75 FT./MIN.	(206 CM/MIN.)		
<b>DRAIN</b>	2"	-		
<b>WASH PUMP MOTORS HP (2)</b>	1	1		
<b>CONVEYOR MOTOR HP</b>	1/3	1/3		
<b>WATER INLET - FILL</b>	3/4"	-		
<b>WATER INLET - FINAL RINSE</b>	1/2"	-		
<b>WASH TANK CAPACITY</b>				
PRE-WASH	4.25 GAL	(16.0 L)		
WASH	11.75 GAL	(44.5 L)		
TOTAL	16.0 GAL	(60.5 L)		
<b>WASH PUMP CAPACITY</b>				
EACH	52 GPM	(197 LPM)		
<b>OPERATING TEMPERATURE</b>				
WASH	140°F-150°F	(60°C/65.5°C)		
FINAL RINSE	140°F-150°F	(60°C/65.5°C)		
<b>WATER CONSUMPTION</b>				
PER RACK (FINAL RINSE)	.8 GAL	(3 L)		
PER HOUR (FINAL RINSE)	192 GPH	(726.6 LPH)		
<b>DIMENSIONS</b>				
DEPTH	25-1/8"	(64cm)		
WIDTH	44"	(111.7cm)		
HEIGHT	55-1/2"-56-1/2"	(140.97-143.51cm)		
STANDARD TABLE HEIGHT	34"	(86cm)		
MAX HEIGHT CLEARANCE FOR DISHES	19"	(48cm)		
<b>STANDARD DISHRACK</b>				
DIMENSIONS	1	1		
	19-3/4"X19-3/4"	(50X50cm)		
<b>ELECTRICAL RATING</b>	<b>VOLTS</b>	<b>PHASE</b>	<b>AMPS</b>	
	208	1	61	
	240	1	65	
	208	3	38	
	240	3	42	
<b>BOOSTER HEATER</b>	10kW			
<b>SPECIFY DIRECTION OF RACK TRAVEL (RIGHT TO LEFT, LEFT TO RIGHT) WHEN ORDERING</b>				
<b>SHIPPING WEIGHT</b>				
APPROXIMATE	662#	(300kg)		

**Summary Specifications: Model CMA-44L**

The Model CMA-44L low energy, chemical sanitizing conveyor dishwasher meets NSF, UL, and CUL sanitation and construction standards WITHOUT the use of a BOOSTER HEATER. The CMA-44L performs three separate washing functions including a built-in pre-wash, all in a 44" space. The CMA-44L washes up to 242 racks per hour and uses a minimum .8 gallons of water per rack while achieving sparkling, clean, dry dishes.

**Available Models**

- CMA-44L R/L Right to Left
- CMA-44L L/R Left to Right

**Available Options**

- Corner Feed Table
- Alternative electrical options
- Also available at 205 or 167 racks/hr
- Stainless steel dishtables
- Auto Fill
- Vent Hood with 4" X 16" Vent and Damper Control (2 per set)
- Motor Cover

AIA #