



NORDIC CCM1030 SERIES

MODULAR CUBED ICE MAKER



Ice maker shown on B842SS bin

FEATURES:


- Produces up to 1201 lbs. (546 Kgs.) of ice per day
- Constructed from corrosion-resistant stainless steel
- Built in Agion Antimicrobial product protection effective against mold, mildew and fungus
- Ultra-low profile – only 26 inches (660 mm) tall
- Harvest assist reduces utility consumption
- Choice of full or half cube size
- No air filter to clean or replace

Protected by Agion



Nature's antimicrobial

Dimensions and Air Flow

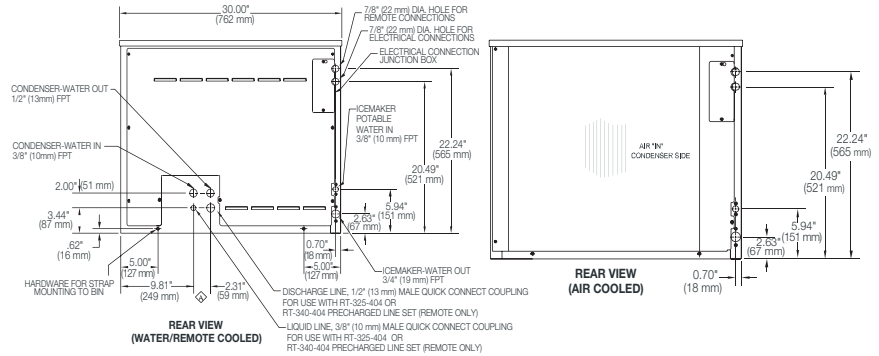


OPERATING LIMITS

Ambient Temp. Range Air & Water	50° - 110°F (10° - 43°C)
Water Temp. Range	40° - 100°F (4.5° - 38°C)
Water Pressure Ice Maker Water in	Min. 20 psi (1.4 bar)
	Max. 60 psi (6.9 bar)
Condenser Inlet Water (Water cooled only)	Min. 20 psi (1.4 bar)
	Max. 60 psi (6.9 bar)

MODEL NO.	Cond. Unit	Ice Prod. per 24 hrs. at 70° Air / 50° Water lbs. (Kgs.)	Ice Prod. per 24 hrs. at 90° Air / 70° Water lbs. (Kgs.)	Water Used-Gals. (Ltrs.) per 100 lbs. of ice 90° Air / 70° Water		Kilowatts Used per 100 lbs. of ice 90° Air / 70° Water	Heat Rejection (Btuh)	Electrical Rating	Min. Circuit Amp.
				Ice Prod. Use	Cond. Use				
CCM1030A*2	Air	1109 (504)	811 (369)	20.6 (78)	n/a	5.4	16239	208-230/60/1	13.8
CCM1030W*2	Water	1121 (510)	941 (428)	23.7 (90)	169.8 (643)	3.8	15986	208-230/60/1	9.0
CCM1030R*2	Remote	1201 (546)	905 (411)	19.1 (72)	n/a	5.4	18149	208-230/60/1	13.8
CCM1030AF5	Air	1027 (467)	742 (337)	21.8 (83)	n/a	6.0	15699	230/50/1	13.3
CCM1030WF5	Water	1087 (494)	917 (417)	23.6 (89)	170.5 (645)	4.0	16005	230/50/1	9.5
CCM1030RF5	Remote	1077 (490)	801 (364)	22.4 (85)	n/a	5.5	16127	230/50/1	15.1

MODEL NO.	Description	Shipping Weight lbs. (Kgs.)
RC08002	Remote Condenser for 1 model CCM1030R (208-230/50-60/1 voltage)	95 (43)
RT25	25 ft. (7.6m) Precharged Tubing Kit for R-404A models	13 (6)
RT40	40 ft. (12m) Precharged Tubing Kit for R-404A models	18 (8)
RT60	60 ft. (18.2m) Precharged Tubing Kit for R-404A models	26 (12)

See Bin specification sheet for information on ice storage bins.
 * Represents cube size. For full cube substitute an "F", for half cube substitute an "H".
 Please note: air-cooled units require 6" (152 mm) clearance for air intake and exhaust.



NUMBER OF WIRES 3

MAX. FUSE SIZE 50 Hz: 15
 60 Hz: 20

SHIPPING WEIGHT LBS (KGS.) . . 225 (102)

AGENCY LISTINGS



Cube Size:	Width	Depth	Height
Full	7/8" (22mm)	7/8" (22mm)	7/8" (22mm)
Half	3/8" (10mm)	7/8" (22mm)	7/8" (22mm)



IN THE U.S.A.
 Ph: 800.238.3600
 Fax: 763.488.4283

OUTSIDE THE U.S.A.
 Ph: 763.488.8200
 Fax: 763.488.4283

101 Broadway Street West
 Osseo, MN 55369
 www.cornelius.com