



## NORDIC CCM2148 SERIES

MODULAR CUBED ICE MAKER



Ice maker shown on B1315SS bin



### FEATURES:

- Produces up to 1998 lbs. (908 Kgs.) of ice per day
- Constructed from corrosion-resistant stainless steel
- Built in Agion Antimicrobial product protection effective against mold, mildew and fungus
- Ultra-low profile – only 26 inches (660 mm) tall
- Harvest assist reduces utility consumption
- Choice of full or half cube size
- No air filter to clean or replace

Protected by Agion



Nature's antimicrobial

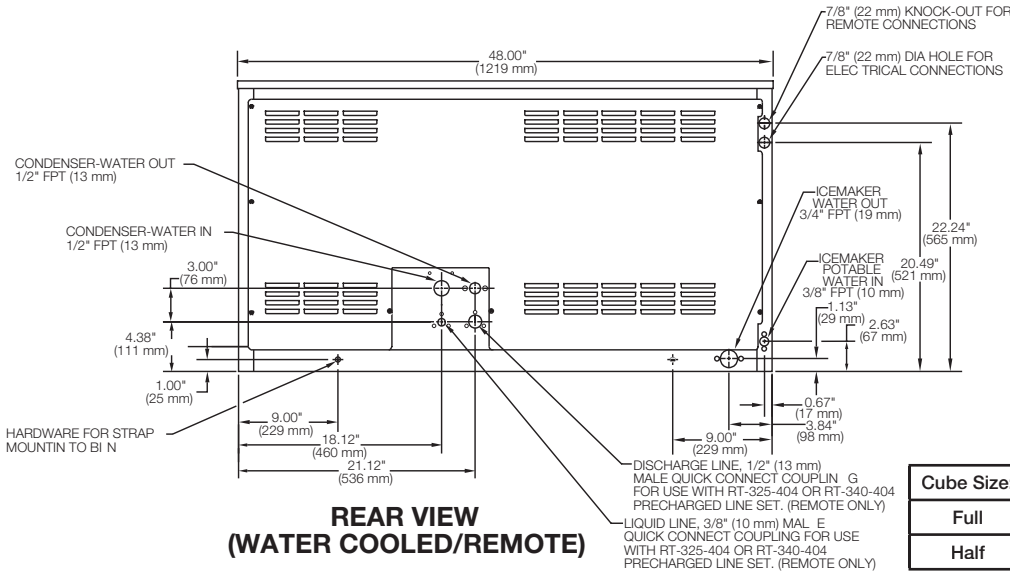

Cube Size:	Width	Depth	Height
Full	7/8" (22mm)	7/8" (22mm)	7/8" (22mm)
Half	3/8" (10mm)	7/8" (22mm)	7/8" (22mm)

MODEL NO.	Cond. Unit	Ice Prod. per 24 hrs. at 70° Air / 50° Water lbs. (Kgs.)	Ice Prod. per 24 hrs. at 90° Air / 70° Water lbs. (Kgs.)	Water Used-Gals. (Ltrs.) per 100 lbs. of ice 90° Air / 70° Water		Kilowatts Used per 100 lbs. of ice 90° Air / 70° Water	Heat Rejection (Btuh)	Electrical Rating	Min. Circuit Amp.
				Ice Prod. Use	Cond. Use				
CCM2148W*2	Water	1939 (881)	1892 (860)	24.9 (94)	109.9 (416)	4.3	33970	208-230/60/1	25.3
CCM2148R*2	Remote	1998 (908)	1714 (779)	21.08 (80)	n/a	5.7	35192	208-230/60/1	33.7
CCM2148W*3	Water	1953 (888)	1847 (840)	26.5 (100)	150.5 (570)	4.3	33179	208-230/60/3	16.6
CCM2148R*3	Remote	1953 (830)	1716 (780)	21.5 (81)	n/a	5.6	35077	208-230/60/3	23.2

MODEL NO.	Description	Shipping Weight lbs. (Kgs.)
RC21002	Remote Condenser for 1 model CCM2148R (208-230/50-60/1/3 voltage)	155 (71)
RT25	25 ft. (7.6m) Precharged Tubing Kit for R-404A models	13 (6)
RT40	40 ft. (12m) Precharged Tubing Kit for R-404A models	18 (8)
RT60	60 ft. (18.2m) Precharged Tubing Kit for R-404A models	26 (12)

See Bin specification sheet for information on ice storage bins  
 \* Represents cube size. For full cube substitute an "F", for half cube substitute an "H".  
 90° / 70° figures are rated in accordance with ARI Standard 810.

NUMBER OF WIRES . . . . . 3 or 4  
 MAX. FUSE SIZE . . . . . 20, 30 or 50  
 RECOMMENDED BREAKER SIZE 40  
 SHIPPING WEIGHT LBS (KGS.) . . 50 Hz: 360 (164)  
 60 Hz: 375 (170)



AGENCY LISTINGS . . . . .

**OPERATING LIMITS**

Ambient Temp. Range Water	50° - 110°F (10° - 43°C)
Air Temp. Range Remote	-20° - 100°F (-29° - 43°C)
Water Temp. Range	40° - 100°F (4.5° - 38°C)
Water Pressure Ice Maker Water in	Min. 20 psi (1.4 bar)
	Max. 60 psi (6.9 bar)
Condenser Inlet Water (Water cooled only)	Min. 20 psi (1.4 bar)
	Max. 60 psi (6.9 bar)



IN THE U.S.A. Ph: 800.238.3600 Fax: 763.488.4283  
 OUTSIDE THE U.S.A. Ph: 763.488.8200 Fax: 763.488.4283  
 101 Broadway Street West Osseo, MN 55369 www.cornelius.com