


Standard Features

- Standard size:
23"W x 28"D x 62"H (End Load)
Custom Sizes Available
- Max "R" insulation sandwiched between two durable fabric layers.
- Handy zippered access flap (Velcro® optional).
- Clear pocket for product labeling
- Loop for wall-hanging storage

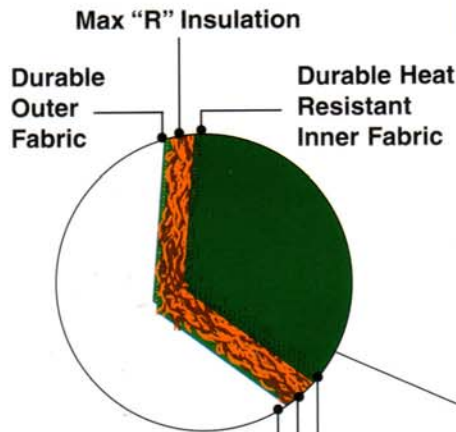

INSULATION MATERIAL

- 65% Olefin, 35% Polyester
- Fibers absorb less than 1% moisture
- Flame Rating: Class I as per Federal Flammable Fabrics Act 16 CFR Part 1610
- "R" Value: 2.20 up to 2.50
- Thickness: 0.55" (6.2 oz. per sq. yd.)

OUTSIDE MATERIAL

- 24 oz. per sq. yd. (0.61 mm)
- Vinyl Coated Polyester Fabric
- -20°F Coldcrack
- Break Strength: 90 x 80 lbs. (ASTM 5034)
- Flame Rating: California Fire Marshall - CA117 Section E, MVSS-302

INSIDE MATERIAL

- Mallard Duck (100% Cotton)
- Weight: 11.5 oz. per sq. yd.
- Break Strength: 170 x 100 lbs. (Method 5100)
- Flame Rating: California Fire Marshall - CA117 Section E, MVSS-302



Benefits

- Transforms an open rack into an inexpensive "closed cabinet" (insulated pad included for bottom shelf).
- Turns a non-insulated cabinet into an insulated cabinet (and prevents skin burns from hot exterior metal surfaces).

Customer Satisfaction Guarantee

Within 30 days, if you are not convinced of the quality, value and benefits of Curtron Protecto-Covers®, you may return the item for a full refund.

