

**TRUE FOOD SERVICE EQUIPMENT, INC.**

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366
 (636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com

Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model #: _____

AIA #

SIS #

GDM Series - Glass Door Merchandisers (single door radius front models)

**GDM-23RF**

*TRUE is the world's largest manufacturer of
glass door merchandisers.*

Glass Door Reach-In Refrigerators (single door radius front models)

- ☐ **GDM-10RF**, ☐ **GDM-12RF**,
☐ **GDM-23RF**, ☐ **GDM-26RF**

SPECIFICATIONS / FEATURES

CABINET CONSTRUCTION:

- Durable and permanent non-peel or chip white vinyl exterior.
- White, vinyl coated aluminum interior cabinet liner with 300 series stainless steel floor. Construction of liner in accordance with NSF standards.
- Cabinet mounted on a welded, galvanized frame rail, painted for additional corrosion protection.
- Safety shielded fluorescent interior lighting. Integrated door light standard.

DOORS:

- Triple pane thermal insulated glass. Doors extend for full view of product. Door gaskets of one piece construction.
- Adjustable, self closing, torsion type closure system. The face of each door fitted with a 12" long handle.

INSULATION:

- Entire cabinet structure insulated using foamed-in-place CFC free polyurethane foam.

SHELVING:

- Adjustable vinyl coated wire shelves. Shelves capable of supporting up to 250 lbs.
- Full height shelf support pilasters, with double oblong holes on 1/2" centers. Pilasters made of the same material as cabinet interior. Four (4) chrome plated, stainless steel shelf clips to be included for each shelf.

REFRIGERATION SYSTEM:

- Refrigeration system factory balanced using CFC free 134A refrigerant.
- Bottom mounted condensing unit - easy access for maintenance.
- Factory pre-engineered capillary tube system with oversized condenser and evaporator to reduce product pull down time and to consistently maintain 33°F to 38°F interior cabinet temperature. (non-adjustable capillary tube system superior to problematic expansion valve)
- Evaporator - epoxy coated at the time of manufacture to eliminate the potential of corrosion.

ELECTRICAL CHARACTERISTICS:

- Unit completely pre-wired at factory, and ready for final connection to a 115/60/1 phase - 15 amp dedicated outlet. A cord and plug set to be included.
- A sole use circuit is required.

Also available:

- Wine Merchandiser
- Two Door Refrigerator

Remote cabinets available 14% off list
 (condensing units supplied by others).
 Consult factory technical service dept. for BTU information.



115/60/1
NEMA-5-15R

Specifications subject to change without notice.

Printed in
U.S.A.

2/03




Exceptions:


APPROVALS:




GDM Series: Glass Door Merchandisers - Single Door Radius Front

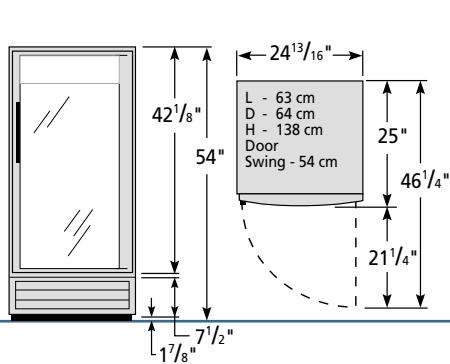


GDM-10RF

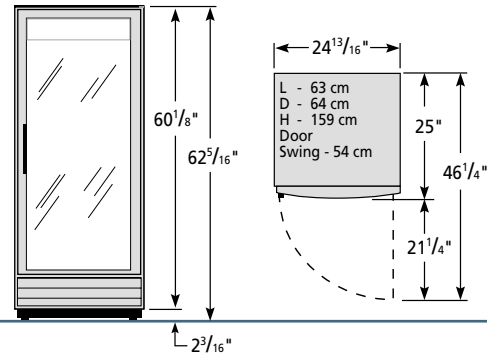

GDM-12RF

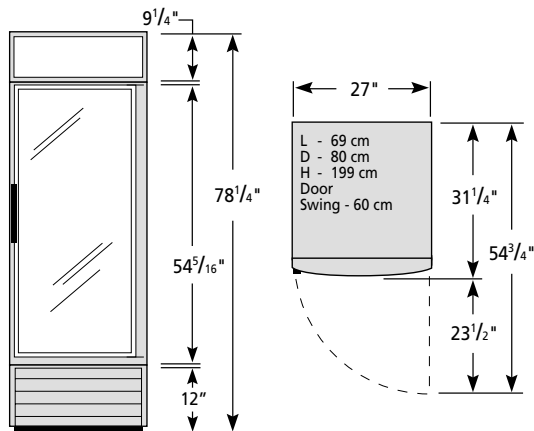

GDM-23RF

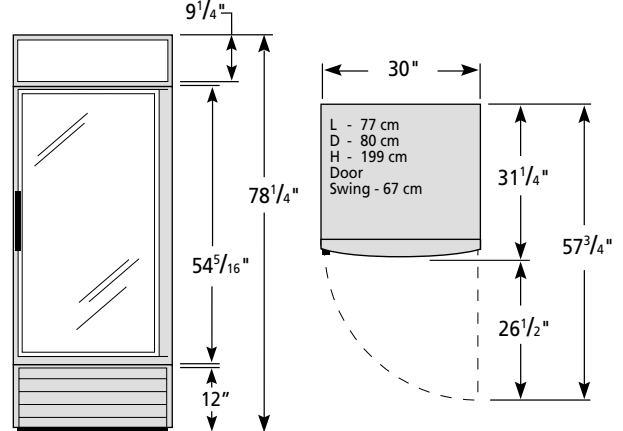

GDM-26RF

Rough-In Data

Model	Doors	Capacity (Cu. Ft)	# of Shelves	Dimensions (inches)			HP	Volts	PH	Amps	NEMA Config.	Cord Length (feet)	Crated Weight
				L	D	H							
GDM-10RF	1	10	3	24 13/16	25	54	1/5	115	1	5.0	5-15	6	206
GDM-12RF	1	12	3	24 13/16	25	62 5/16	1/5	115	1	5.0	5-15	6	233
GDM-23RF	1	23	4	27	31 1/4	78 1/4	1/3	115	1	7.5	5-15	9	312
GDM-26RF	1	26	4	30	31 1/4	78 1/4	1/3	115	1	7.8	5-15	9	321

Specifications subject to change without notice.

Standard Features

- Oversized and balanced, environmentally friendly 134A refrigeration system - holds 33°F to 38°F.
- White laminated vinyl exterior (rosewood, walnut and black vinyl also available).
- White, vinyl coated aluminum interior and 300 series stainless steel bottom (NSF approved).
- Positive seal, torsion type closure system, self-closing doors.
- Adjustable vinyl coated wire shelves.
- Epoxy coated evaporator.
- Integrated door light.
- Fluorescent interior lighting (safety shielded).
- Triple pane thermal insulated glass.
- Foamed-in-place polyurethane high density cell insulation.
- Illuminated sign panel included on GDM-23RF and GDM-26RF, decal on GDM-10RF and GDM-12RF.
- Bottom mount compressor.
- Slide out compressor can be serviced easily and accessed by a single repairman.

- 1 year parts & labor warranty (USA).
- 5 year compressor warranty.
- See our website www.truemfg.com for the latest color & sign offerings.

Optional Accessories

- ☐ Gravity-feed TrueTrac® shelving.
- ☐ Wine racks.
- ☐ Novelty Baskets.
- ☐ Additional shelves available.
- ☐ Barrel locks available.
- ☐ Available with 2 1/2" diameter castors.
- ☐ Available with stainless steel or optional seismic legs.
- ☐ A variety of sign panels available.

Clearance Required For Coolers (USA)

Sides Inches/mm	Top* Inches/mm	Rear Inches/mm
0 / 0	1 / 26	1 / 26

* GDM-10RF & GDM-12RF only.



Model	Front	Right	Plan	3D
GDM-10RF	TFD021E	TFD021S	TFD021P	TFD0213
GDM-12RF	TFD027E	TFD027S	TFD021P	TFD0273
GDM-23RF	TFAY28E	TFAY28S	TFAY28P	TFAX283
GDM-26RF	TFAY29E	TFAY29S	TFAY29P	TFAY293

TRUE FOOD SERVICE EQUIPMENT

St. Charles Industrial Center • P.O. Box 970 • O'Fallon, Missouri 63366 • (636)240-2400 • FAX (636)272-2408 • (800)325-6152 • www.truemfg.com
Printed in U.S.A.

