

**REFRIGERATOR MANUFACTURER**  
**Turbo air**  
 more durable, efficient, beautiful

4184 E. Conant St.  
 Long Beach, CA 90808  
 Tel. 310-900-1000  
 Fax. 310-900-1077  
[www.turboairinc.com](http://www.turboairinc.com)

Project :	
Model # :	
Item # :	Qty :
Available W/H :	
Approval :	

## Solid Dual Temperature

Reach-In Top Mount  
 J Series

**Model : JRF-45**

### ≡ FEATURES & BENEFITS ≡

#### ■ Digital temperature control & monitor system

- Keep food products safe by maintaining constant temperatures.
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originate from cold air leaks.
- Digital display allows for easy monitoring.
- Programs interpret the condition of refrigeration systems by self-diagnosis.
- Rapid cool-down function (Turbo freeze).
- Smart fuzzy defrost system.
- Automatic evaporator fan motor delays.

#### ■ Hot gas condensate system **Only Turbo Air models**

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

#### ■ Door pressure release device **Only Turbo Air models**

Pressure relief doors are designed to eliminates vacuum pressure and allows easy, instant door opening.

#### ■ Two separate refrigeration system

J series dual temp. model is designed with two separate compressors for refrigerator & freezer. 35% of freezer is built on the left and 65% of refrigerator is on the right.

#### ■ Efficient refrigeration system

Turbo Air's J series dual temp. models are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

#### ■ Exterior & interior of cabinet construction

Stainless steel exterior (galvanized steel top, bottom and back) and stainless steel interior with AL inside walls and door liners. It guarantees the utmost in cleanliness and long product life. Unlike other companies' products, the sharp corners and edges have been rounded to reduce the risk of injury.

#### ■ Adjustable, heavy duty, PE(polyethylene) coated wire shelves

#### ■ LED interior lighting

#### ■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

#### ■ Refrigerator holds 33°F ~ 38°F, and freezer holds -10°F ~ 0°F for the best in food preservation



ENERGY STAR®  
 Qualified

Model	Swing Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D* x H † (inches)
JRF-45	2	16.4(F)/22.8(R)	6	1/3(F) 1/4(R)	8.8	452	49 5/8 x 31 1/2 x 72

## Model : JRF-45

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	① NEMA 5-15P
Full Load Amperes	8.8
Compressor HP	1/3(F) 1/4(R)
Feed Wires with Ground	3
Cord Length (ft.)	9
Refrigerant	R-134A(F) / R-134A(R)
DIMENSIONAL DATA	
# of Doors	2
Net Capacity (cu. ft.)	16.4(F) / 22.8(R)
Ext. Length Overall (in.)	49 5/8 (1260mm)
Ext. Depth Overall (in.) *	31 1/2 (800mm)
Ext. Height Overall (in.) †	72 (1829mm)
Freezer Int. Demension (L x D x H) (in.)	18 1/8 x 27 3/8 x 56
Ref. Int. Demension (L x D x H) (in.)	25 1/4 x 27 3/8 x 56
Gross Weight (lbs.)	452
# of Shelves	6
Shelf Size (in.)	17 x 24 1/2 (F) / 24 x 24 1/2 (R)

Design and specifications subject to change without notice.  
Actual shipping weight may differ due to extra packing materials for product protection.  
\* Depth does not include 2" for rear condensate enclosure.  
† Height does not include 5" for caster height.

■ **WARRANTY : 2 Year Parts and Labor Warranty  
Additional 3 Year Warranty on Compressor**


- Door locks standard
- Self-contained system
- Standard 4" dia. swivel casters with locks on the front set
- Solid and sturdy grille design
- Legs available (optional)

■ **OPTIONAL ACCESSORIES :**


- 5" caster, 1/2" diameter & 13 TPI: M726500100 (non-brake), M726500200 (w/ brake)
- 6" stainless steel leg: 30221M0600
- Additional PE coated wire shelf: K2D9000102 (Left), K2B9000202 (Right)

## PLAN VIEW


(unit : inch)



FRONT VIEW

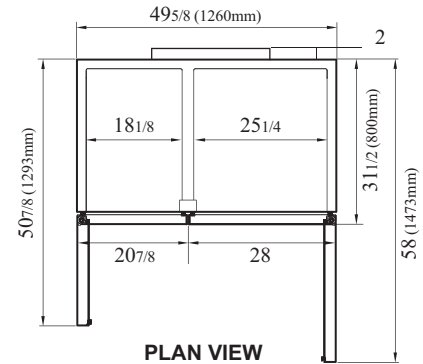

PLAN VIEW

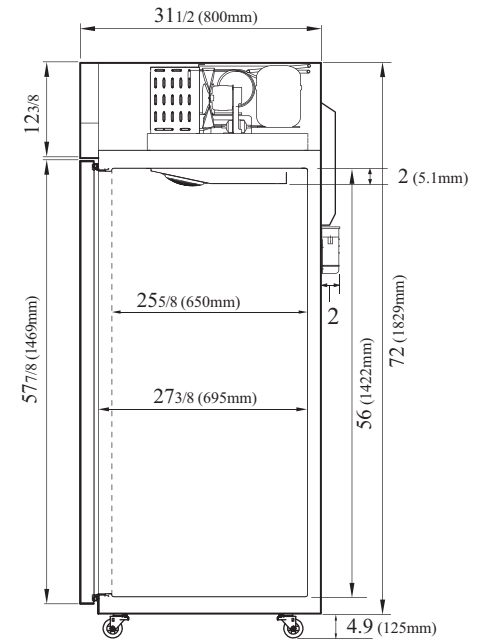

SIDE VIEW

Ver.201604



ENERGY STAR®  
Qualified

- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002