



# TRANSPORT SELECT<sup>®</sup>

## Heavy Duty Holding Cabinet

Models: ☐ HHDS60U13 ☐ HHDS74U17

### Design Features

- Temperature range of 70°F - 215°F.
- Top mounted convection heat and humidity system with high wattage heating element maintains even temperatures throughout the cabinet ensuring quick preheating and rapid recoveries.
- Accurate, reliable thermostat adjustable to 215°F (°C)
- Door features include magnetic gasket to prevent heat loss, heavy-duty hinges and positive-closing latch.
- Full perimeter bumper of gray non-marking vinyl.
- Heavy-duty, plate-type swivel casters with 6" x 2" balloon tires, for easy maneuvering over almost any surface (front two casters provided with brakes).
- Field reversible doors.



### Quality Construction

- Heavy-gauge stainless steel construction
- Fully insulated door, sides, back, base and top with 1 1/2" fiberglass.
- Universal interior provided with heavy-duty extruded universal pan supports that accept 12" x 20" and 18" x 26" pans.
- Stainless steel tubular push/pull handles mounted on rear of cabinet.
- Heavy-duty stainless steel cord wrap
- 12ga stainless steel hinging.

### Options & Accessories

- Padlock hasp
- Additional extruded universal pan supports
- Chrome electro-plated wire shelving (18"x26")
- Dutch Door available on HHDS74U17
- 208V or 240V
- Posi-Lock 6" Balloon Caster

### Warranty & Certifications

#### Parts and Service Warranty

- Protected by BevLes 2 year parts and 1 year service warranty.

#### Certified by the following:




Mailing: 729 Third Ave., Dallas, TX 75226 • Shipping: 1938 Wyott Dr., Cheyenne, WY 82007  
(800) 441-1601 • Fax: (214) 565-0796 • [www.BevLes.com](http://www.BevLes.com) • [sales@BevLes.com](mailto:sales@BevLes.com)



# TRANSPORT SELECT®

## Heavy Duty Holding Cabinet

Models: ☐ HHDS60U13 ☐ HHDS74U17

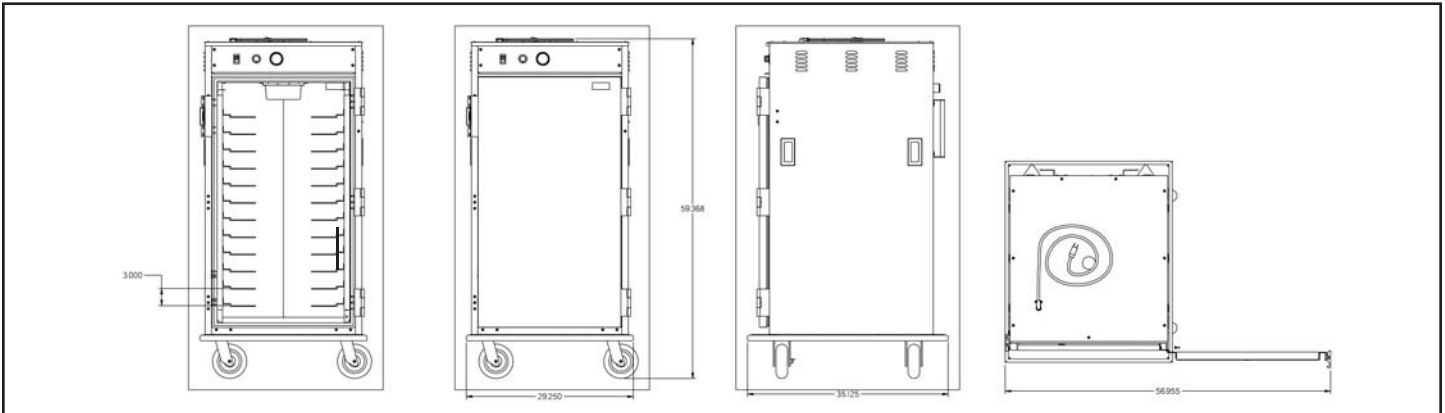

Model Number	Capacity			Dimensions			Ship Wt.	Act. Wt.
	18x26	12x20	SPC/G*	H	W	D		
HHDS60U13	13	26	3"	59.5"	29.3"	35.2"	370 lbs (167.8 kg)	340 lbs (154.2 kg)
HHDS74U17	17	34	3"	75.5"	29.3"	35.2"	440 lbs (186 kg)	410 lbs (170.1 kg)

Electrical	Voltage	Watts	Amps	Electric Service	Phase	Hertz	Clearances
Standard	120V	1800	15.2	20A Dedicated Circuit	1	50/60	Sides & Back = 0"; Top = 3"
Optional	120V	1500	10.6	15A Dedicated Circuit	1	50/60	Sides & Back = 0"; Top = 3"

\*Adjustable on 1 1/2" centers

### Construction:

- Exterior Body: 20 ga. 304 3# stainless steel
- Interior Body: 20 ga. 304-2B stainless steel
- Exterior Door: 20 ga. 304 #3 stainless steel
- Interior Door: 22 ga. auto-brite stainless steel
- Base: 14 ga. 304-2B stainless steel w/ perimeter bumper.
- Door Latch and Hinges: Positive action door latch with 270° stainless steel 12 ga. heavy-duty hinges
- Door Configuration: Full door on all models; Dutch doors available on HHDS74U17.
- Door Gasket: Magnetic, NSF approved Santoprene.
- Insulation: Fully insulated back, sides, base, top and door(s) with 1.5" fiberglass insulation (5.7 R-Factor and minimum rating of .26K per inch).
- Two stainless steel tubular push/pull handles mounted vertically on rear of cabinet.
- Pull Grips: recessed stainless steel, pull grips mounted with hardware.
- Full Perimeter Bumper

### Pan Support Assembly:

- Side (Air Duct) Panels: 22 ga. 304-2B stainless steel.
- Pan Supports: Heavy-duty extruded universal angles

adjustable on 1 1/2" spacing (bottom supported).

### Castors:

- Heavy-duty plate type swivel casters, with 6" balloon tire wheels; front two casters with brakes.

### Heating Module and Controls:

- Temperature Control: Temperature range 70°F - 215°F
- Temperature Display: Glass lens dial thermometer.
- Humidity System: 2.25 quart stainless steel water reservoir.
- Fan Blower: 1-piece modular drop-in design blower assembly.
- Cord Wrap: 14 ga. stainless steel mounted on rear panel.

### Electrical:

- 120V-20A, 1 PH electrical service. (option 120V-15A, 1PH electrical service)
- Switch: Sealed custom heavy-duty 20 Amp
- Cord and Plug: 8' cord with 20A molded plug (NEMA 5-20P)

### Shipping:

- Freight Class: 85
- FOB: Cheyenne, WY 82007

\*Specifications subject to change without notice.



Mailing: 729 Third Ave., Dallas, TX 75226 • Shipping: 1938 Wyatt Dr., Cheyenne, WY 82007  
(800) 441-1601 • Fax: (214) 565-0796 • www.BevLes.com • sales@BevLes.com

2/14/07  
#B101a