

With a digital electronic temperature control, this unit provides even heat throughout the holding cavity. With all around insulation, the drawer warmers provide excellent energy efficiency.


- Drawers accept Panasonic 23 cup rice pots. Accessory drawer adapter available for Town 30 cup pot (pots and lids not included)
- Allows one pot per drawer of cooked rice for long term holding, with the option of serving from third pot in top heated well (HDW-2U-1 only)
- Stainless steel construction, including back panel, handles the rigors of daily kitchen use
- Heavy duty drawers and drawer slides and robust telescopic drawer slides makes pan removal easy and efficient
- Stainless steel utensil well and utensil pan included with HRDW- 2U and HRDW- 2U-1 models only
- HRDW-2U-1 has adjustable t-stat with knob for optimal rice holding in the top well
- Raised beveled edge on top of HRDW-2 and HRDW-2-U models only



Rice Drawer Warmers

Models: HRDW-2U-1, HRDW-2U, HRDW-2

HRDW-2U-1

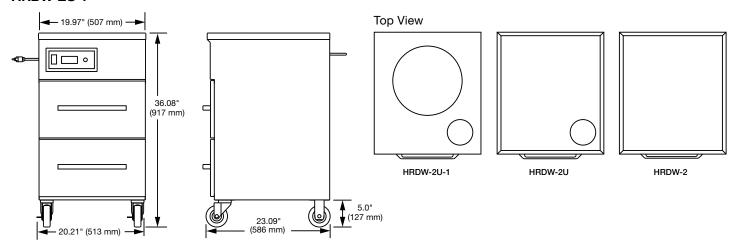


SPECIFICATIONS Rice Drawer Warmers

Model	Description	Dimensions (Width x Depth x Height)	Volts	Phase	Watts	Amps	Plug	Cord Location
HRDW-2U-1	Rice and Utensil Well with Utensil Pan	20.21" x 23.09" x 36.08" (513 x 586 x 917 mm)	120	Single	1150	9.6	NEMA 5-15P	Back of unit, upper left corner
HRDW-2U	Utensil Well with Utensil Pan and raised bevel edge				700	5.8		
HRDW-2	Raised bevel edge only							

[•] Includes 11/4" (31.75 mm) for drawer handle.

PLUG CONFIGURATIONS

NEMA 5-15P



ACCESSORIES

(Available for purchase at any time)

- Hinged lid for top rice well (HRDW-2U-1 only)
- Drawer adapter for Town 30 cup rice pot

PRODUCT SPECS Rice Drawer Warmer

The Rice Drawer Warmers shall be a Hatco Model \dots , as manufactured by the Hatco Corporation, Milwaukee, WI 53234, U.S.A.

The unit shall have ... drawer(s) and be rated at ... watts, ... amps. The Rice Drawer Warmer will hold Panasonic 23 cup rice pots with optional Town 30 cup pot drawer adaptors.

The Rice Drawer Warmer shall have a stainless steel exterior, interior, drawer slides,

and assembly. Drawer rollers shall be durable nylon. The drawer assembly shall fully extend to allow removal of pots and pans without tilting in standard width models.

The unit shall have insulated top, bottom and sides of cabinet with cord and plug attached. Each drawer shall have individual power switch, thermostat and temperature monitor.

Comes with 24/7 parts and service assistance (U.S. and Canada only).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (800) 558-0607 | (414) 671-6350 Fax: (800) 543-7521 | Int'l. Fax: (414) 671-3976 | www.hatcocorp.com | equipsales@hatcocorp.com or intlsales@hatcocorp.com