




Item # _____

Job _____

METRO® MOBILE END LOAD RACKS

- **Material:** Special design, natural finish, high strength, extruded aluminum (6063-T6 alloy).
- **Rugged:** Double-riveted aircraft construction throughout.
- **Pass-Thru Design:** Can be loaded on one side and unloaded from the other for maximum efficiency and convenience.
- **Lightweight:** Easy to handle. Freewheeling.
- **Sanitary:** Easy cleaning.
- **Rapid Cooling**
- **Ideal** for freezer operations, refrigerator use, bakeries, commissaries.

Note: Wood grain vinyl aluminum enclosure panels are available. Completely removable without tools. See accessories.

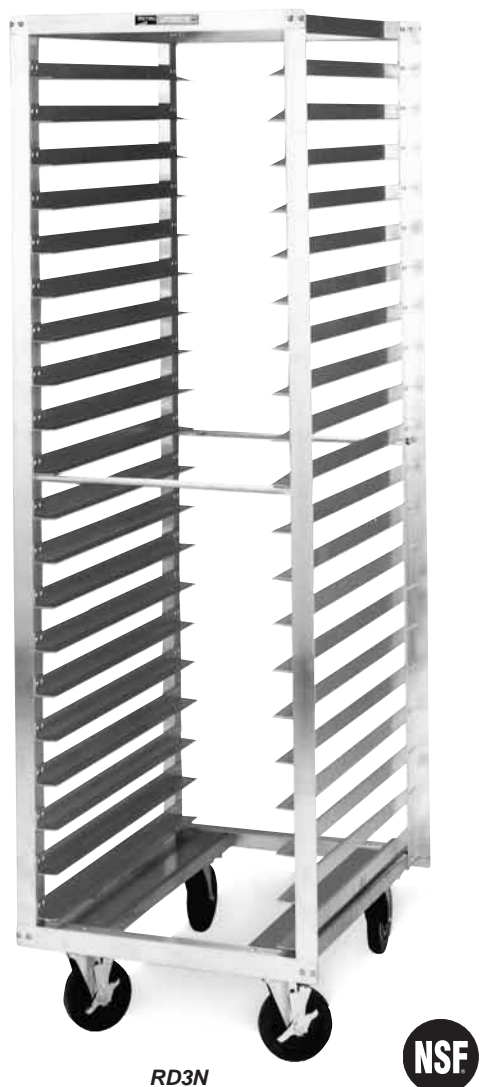

InterMetro Industries Corporation
North Washington Street
Wilkes-Barre, PA 18705
www.metro.com



End Load Racks Single Section/Model — RD Series

13.50



Job _____

METRO® MOBILE END LOAD RACKS




Specifications

- **Material:** Special design, natural finish, high strength, extruded aluminum (6063-T6 alloy).
- **Construction:** Pass-thru design, aircraft-riveted construction throughout.
- **Corner Posts:** 1½"x1½"x1/8" (38x38x3.1mm) angle-shaped.
- **Top & Bottom:** 1½"x1½"x1/8" (38x38x3.1mm) angle-shaped riveted to four corner posts.
- **Casters:** Two A5L – 5" (127mm) ball bearing swivel, self-lubricating axle, rubber-wheeled, zinc-plated, bolted to full-length, 14-gauge channel bottom frame. Two A5LB – same as above with wheel brake.
- **Slides 3" (76mm) & 5" (127mm) Spacing:** .060"x1¼"x1½" (1.5x32x38mm) bulb-tipped angle, double-riveted to posts. RD15N and RD25N – .080"x1¼"x3" (2.0x32x76mm).
- **Slides 1½" (38mm) Spacing:** .060"x1½"x1½" (1.5x12.7x38mm) bulb-tipped, extruded channel double-riveted to posts.

Note: Racks 60" (1524mm) and higher have ½" (12.7mm) diameter stabilizer rods at center of each end.

LOAD RATINGS: 20 lbs. (9kg) per level, or not to exceed 375 lbs. (170kg) per unit.

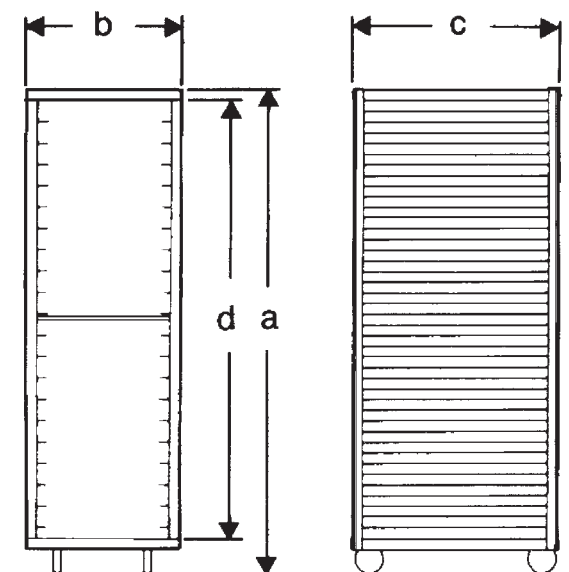

Dimensions

Cat. No.	(a)	(b)	(c)	(d)		Slide Spacing		Pan Capacity		Shipping Weight		
	Height/Width/Depth					Inside Height	(in.)	(mm)	No.	Size (in.)	(lbs.)	(kg)
	(in.)		(mm)	(in.)	(mm)							
RD3N	69 1/4	21 1/2	29	1759x545x735	60 1/2	1535	3	76	20	18x26	52	23
								or 40 14x18 Pans				
RD13N	69 1/4	21 1/4	26 1/2	1759x545x670	60 1/2	1535	1 1/2	38	40	18x26 Pans	52	23
RD15N	63 1/4	20	23	1606x510x585	54 1/2	1385	3	76	18	15x20	49	22
								or 18 16x22 Trays				
RD23N	69 1/4	21 1/2	29	1759x545x735	60 1/2	1535	5	127	12	18x26	45	20
								or 24 14x18 Pans				

Accessories

Model No.	Description
A33RD	Gray Continuous Bumper
A37	Gray Corner Bumper
A71	Floor Lock (for use with B5DN/B5DND casters only)
A120	Pan Stop

All Metro Catalog Sheets are available on our Web Site: www.metro.com



InterMetro Industries Corporation
North Washington Street, Wilkes-Barre, PA 18705
Phone: 570-825-2741
Fax: 570-825-2852

L02-075
Printed in U.S.A. Rev. 6/10
Information and specifications are subject to change without notice. Please confirm at time of order.
Copyright © 2010 InterMetro Industries Corp.

For Product Information: U.S. and Canada: 1.800.992.1776 Latin America: 1.561.333.3824 Asia/Pacific: +65.6567.8003 Middle East/Africa: +971.4.811.8286 Europe: +31.76.587.7550