BACK BAR EQUIPMENT

Product Specifications

BBUC90-SS-PT Undercounter Pass-Thru Cooler

with Stainless Steel Exterior

Cabinet has an aluminum subtop and heavy-duty galvanized steel interior with reinforced stainless steel floor.

All models are front breathing with refrigeration available on left or right.



OPTIONS AND ACCESSORIES

6" adjustable legs	Condensing unit on right
Locking casters	Wine Rack
Epoxy-coated shelves with clips	Remote models
Stainless steel shelves with clips	Shallow depth
Expansion valve system	 Food storage rated stainless steel interior (NSF-7)
Electric condensate	

Continental
Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

DIMENSIONAL DATA	
Net Capacity (cu. ft.)	35 (991 cu l)
Width, Overall (in.)	90 (2286 mm)
Barrel Capacity (# Barrel Type Kegs)	4
Straight Wall Capacity (# Straight Wall Kegs)	4
Depth, Overall (incl. handles) (in.)	30 ⁷ / ₈ (784 mm)
Height, Overall (in.)	34 ¹⁵ / ₁₆ (887 mm)
No. of Door(s)	6
No. of Shelves	6
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/2
Capacity (BTU/Hr)*	2500
ELECTRICAL DATA	
Cabinet	115/60/1
Feed Wires (incl. ground)	3
Condensing Unit	115/60/1
Total Amps	13
Cabinet Amps	2.4
SHIPPING DATA	
Weight (lbs.)	505 (229 kg)
Height - Crated (in.)	46 (1168 mm)
Width - Crated (in.)	109 (2769 mm)
Depth - Crated (in.)	42 (1067 mm)

* Rating @ +25°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents.

Project Name: Model Specified: Location: Item No: Quantity: APPROVAL:		
Location: Item No: Quantity:	Project Name:	
Location: Item No: Quantity:		
Location: Item No: Quantity:	Model Specified:	
Item No: Quantity:		
Item No: Quantity:		
	Location:	
APPROVAL:	Item No:	Quantity:
APPROVAL:		
ALL HOVAL.	APPROVAL:	
	AFFIIOVAL.	

Standard Design Features

Environmentally-safe R-134a refrigerant

CABINET ARCHITECTURE

REFRIGERATION SYSTEM

High density, non-CFC polyurethane foam insulation

Stainless steel exterior

Aluminum top

Heavy-duty galvanized steel interior with reinforced stainless steel floor

Heavy-duty epoxy-coated steel shelves

Stainless steel reinforced threshold sills for ease of loading

Cylinder keyed security locks

Magnetic snap-in door gaskets

MODEL FEATURES

Front breathing

Easily accessible and serviceable slide-out condensing unit

Automatic, energy-saving, non-electric condensate evaporator

Front, rear and side venting louvers allow greater condenser air flow for tight fit installations

Incandescent interior lighting

Extra large fin evaporator coil provides uniform air flow distribution to maintain constant product temperature and quick recovery

FLECTRICAL

Completely pre-wired at factory for connection to 115/60/1 phase, 15 amp dedicated outlet

10 ft. cord and plug set included, 90° plug



Equipped with one NEMA-5-15P Plug





This Continental Refrigerator product is warranted to be free from all manufacturing defects, material or workmanship, for a period of one (1) year from date of original installation, or fifteen (15) months from date of shipment, whichever occurs first. All motor-compressor assemblies are warranted to be free from defects, material and workmanship, for a period of five (5) years from date of installation.

Due to our continued efforts in developing innovative products, specifications subject to change without notice.








© Copyright 2011. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.


BACK BAR EQUIPMENT

BBUC90-SS-PT - Undercounter Pass-Thru Model Blueprint

with Stainless Steel Exterior

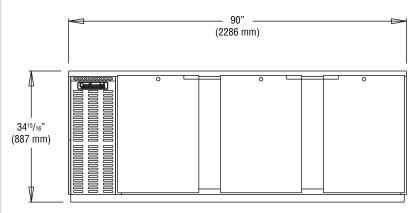

FRONT VIEW





Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com