



ASF-75G
GAS OPEN FRYER



Shown with optional automatic basket lifts, basic control and filtration system.



- Unprecedented high level of efficiency.
- Quick oil temperature recovery.
- Stainless steel front, sides and tank.
- Dual, solid-state controls with electronic ignition.
- Melt cycle for solid or liquid shortening.
- Bank individual, same size fryers and dump stations side by side with gap cover strips.
- 7-year limited fry tank warranty.

The Alto-Shaam ASF-75G open gas fryer cabinet is constructed of stainless steel and includes heavy duty leveling casters mounted on both front and rear. The fryer is provided with a burner and heat exchanger system powered by a fan-assisted combustion system with built-in controls for ignition and flame rectification. The 10 gauge stainless steel fry tank holds 73 pounds (33 kg) of frying compound. Includes two (2) fry baskets and a cleaning brush set. Fryer has a temperature range of 200°F to 390°F (93°C to 199°C). Solid state control provides a temperature accuracy within 4° of set point.

ASF-75G Open Gas Fryer with Basic Control




FACTORY INSTALLED OPTIONS

- Automatic Basket Lifts
- Oil Filtration System
 - Furnished with a mobile oil trolley with filter assembly and a package of 7 paper filters.
 - Powered by a 1/2 hp gear pump featuring side access reset and a 3/4" (19mm) full-port, ball-type drain valve.
- Deluxe Control
 - Programmable memory for up to six (6) product menu keys per lift.

ASF-75G

GAS OPEN FRYER

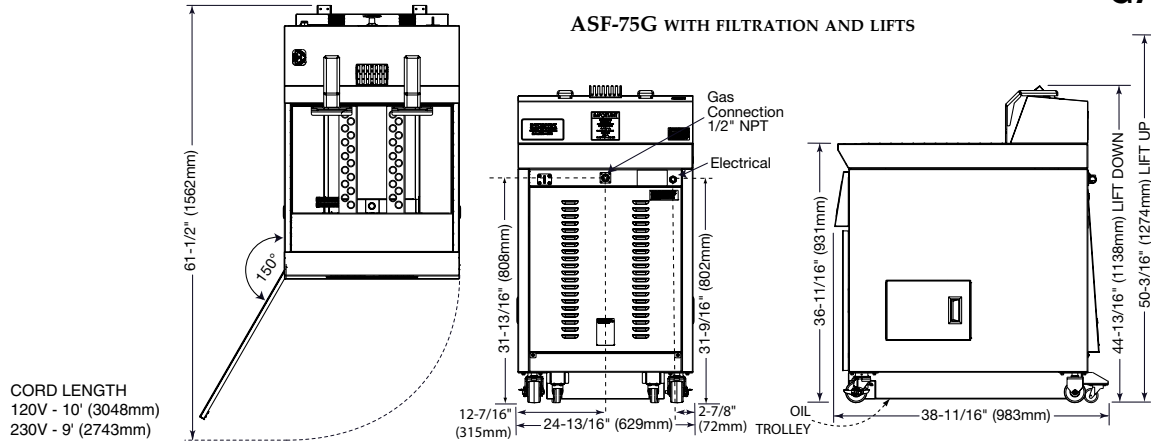

CORD LENGTH
120V - 10' (3048mm)
230V - 9' (2743mm)

CLEARANCE REQUIREMENTS

FRONT: 25" (635mm)

6" (152mm) REQUIRED ON ALL SIDES WHEN ADJACENT TO COMBUSTIBLE SURFACES OR 0" (0mm) WHEN ADJACENT TO NON-COMBUSTIBLE SURFACES.

FOR USE ONLY ON NON-COMBUSTIBLE FLOORS.

DO NOT RESTRICT AIR FLOW FROM FLUE.

DIMENSIONS EXTERIOR (H x W x D)

ASF-75G WITHOUT FILTRATION OR LIFTS

44-13/16" x 24-13/16" x 37-7/16" (1138mm x 629mm x 951mm)

ASF-75G WITH FILTRATION AND LIFTS

44-13/16" x 24-13/16" x 38-11/16" (1138mm x 629mm x 983mm)



BASKET DIMENSIONS (H x W x D)

6" x 9-3/16" x 14-3/16" (152mm x 232mm x 337mm)

GAS SPECIFICATIONS

<input type="checkbox"/> NATURAL GAS	<input type="checkbox"/> PROPANE GAS
120,000 BTU/hr. INPUT	120,000 BTU/hr. INPUT

ELECTRICAL

VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW	CORD & PLUG
120 (AGCY)	1	60	7.2	0.86	 NEMA 5-15P 15A-125V Plug
230 (AGCY)	1	50	4.0	0.92	 CEE 7/7 220-230V PLUG

CAPACITY

SHORTENING/OIL: 73 lb (33 kg) MAXIMUM

LOAD CAPACITY: 13 lb (6 kg) MAXIMUM

WEIGHT EST.

NET WEIGHT: 360 lb (163 kg)
SHIP WEIGHT: 520 lb (236 kg)

CARTON DIMENSIONS: L x W x H
34" x 47" x 57" (864mm x 1194mm x 1448mm)

INSTALLATION REQUIREMENTS

GAS CONNECTION: 1/2" NPT

HOOD INSTALLATION IS REQUIRED

Check plumbing codes for proper supply line sizing to attain minimum burner manifold pressure shown:

NATURAL GAS: 5.0" W.C.

PROPANE GAS: 10.0" W.C.

(1.2 kPa)

(2.5 kPa)

MAX. RECOMMENDED

INLET PRESSURE: 11" W.C. (2.74 kPa)

14" W.C. (3.5 kPa)

NOTE: If a flexible gas line is used, it must be AGA approved, commercial type and at least 1/2" I.D.

Manual gas shut-off valve and restraining device must be installed per code requirements when using a quick disconnect device.

NOT FACTORY SUPPLIED

STANDARD ACCESSORIES

<input type="checkbox"/> Basket, Half-Size (2 INCLUDED AS STANDARD)	BS-27140
Brush Set (ONE 3-BRUSH SET INCLUDED AS STANDARD)	
<input type="checkbox"/> SCRUB BRUSH	BH-28693
<input type="checkbox"/> STRAIGHT BRUSH	BH-28691
Filter, Paper (7 PAPER FILTERS INCLUDED AS STANDARD)	
<input type="checkbox"/> 7 COUNT REFILL PACKAGE	FI-27791
<input type="checkbox"/> 100 COUNT REFILL PACKAGE	FI-27794

OPTIONS

<input type="checkbox"/> Basket, Full-Size (48 CHICKEN PIECE CAPACITY)	BS-26998
FILTERS	
<input type="checkbox"/> Charcoal/Carbon (30 COUNT PKG.)	FI-27648
<input type="checkbox"/> Reusable Mesh (SINGLE FILTER)	FI-27014
<input type="checkbox"/> Fry Pot Cover	5005136
<input type="checkbox"/> Mobile Drawer Cover	5006073
<input type="checkbox"/> Strainer/Skimmer	CE-27400
<input type="checkbox"/> Oil Discard Hose	HO-27686
<input type="checkbox"/> Banking Strip (1 STRIP REQ'D FOR EVERY 2 BANKED FRYERS)	1009510
<input type="checkbox"/> Mobile Oil Caddy	TO-28359
<input type="checkbox"/> Pre-filter Sieve Kit (FOR OIL FILTRATION SYSTEM)	5010451