



Warming Shelves

Models: ☐ WS-2 ☐ WS-3 ☐ WS-4 ☐ WS-5 ☐ WS-6

PRODUCT:

QUANTITY:

ITEM #:

Designed Smart

Dependable Heat for Your Warming Needs!

- APW Wyott Warming Shelves are designed to hold all potentially hazardous foods at required NSF temperatures.
- Unique rope heat system provides uniform heat to your food.
- Designed to provide a rapid heat start-up to bring temperatures up to 212° degrees.

Excellent for all Serving Occasions!

- Ideal for server-to-customer pass-through areas, cafeteria, and buffet lines.
- Provided in 5 different lengths for your specific serving requirements.
- Built with 1/2" rubber feet to prevent the unit from sliding while on the serving line.

Easy to Clean!

- Stainless steel surfaces wash off easier and withstand repeated abuse.



MODEL WS-3 WARMING SHELF



MODEL WS-5 WARMING SHELF

Built Solid

Most Durable Warming Shelves

- Stainless steel construction resists corrosion and wear & tear from incremental handling in serving areas.

Reliability backed by APW Wyott's Warranty

- All APW Wyott warming shelves are backed by a 1-year limited warranty and 1-year on-site labor warranty.
- Certified by the following agencies:



APW Wyott Design Features

- All stainless steel construction.
- Infinite temperature control knob on operator side.
- Six foot cord and plug set.
- 1/2" natural rubber feet.

See reverse side for product specifications.



APW Wyott Foodservice Equipment Company · 729 Third Ave., Dallas, TX 75226
(800) 527-2100 · (214) 421-7366 · Fax (214) 565-0976 · www.apwwyott.com · info@apwwyott.com


Rev. 5/22/2005

PRODUCT:



QUANTITY:

ITEM #:

Warming Shelf

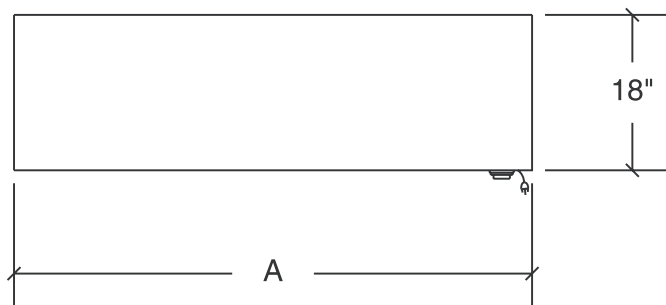

A			
WS-2	24"	WS-5	60"
WS-3	36"	WS-6	72"
WS-4	48"		

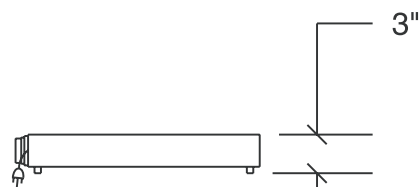

PRODUCT SPECIFICATIONS

Construction:

Stainless steel construction, 1/2" rubber feet.

Electrical Information:

120V units come with 6' cord and NEMA 5-15P plug.
220V units come with 6' cord and EURO plug (CE unit).
208/240V units come with 6' cord and NEMA 6-15P plug.

Electrical Specifications:

WS-2: 120V, 200W, 60 Hz, 1.7 Amps
208V, 200W, 1.0 Amps
220V, 200W, 0.9 Amps
240V, 200W, 0.8 Amps

WS-3: 120V, 300W, 60 Hz, 2.5 Amps
208V, 300W, 1.4 Amps
220V, 300W, 1.3 Amps
240V, 300W, 1.2 Amps

WS-4: 120V, 400W, 60 Hz, 3.3 Amps
208V, 400W, 1.9 Amps
220V, 400W, 1.8 Amps
240V, 400W, 1.7 Amps

WS-5: 120V, 500W, 60 Hz, 4.2 Amps
208V, 500W, 2.4 Amps
220V, 500W, 2.2 Amps
240V, 500W, 2.1 Amps

WS-6: 120V, 600W, 60 Hz, 5.0 Amps
208V, 600W, 2.9 Amps
220V, 600W, 2.7 Amps
240V, 600W, 2.5 Amps

Overall Dimensions:

WS-2: 2 3/8"H x 18"W x 24"L
(60 cm x 45.7 cm x 61.0 cm)

WS-3: 2 3/8"H x 18"W x 36"L
(60 cm x 45.7 cm x 91.4 cm)

WS-4: 2 3/8"H x 18"W x 48"L
(60 cm x 45.7 cm x 121.9 cm)

WS-5: 2 3/8"H x 18"W x 60"L
(60 cm x 45.7 cm x 152.4 cm)

WS-6: 2 3/8"H x 18"W x 72"L
(60 cm x 45.7 cm x 182.9 cm)

Shipping:

WS-2: 27 lbs (12.3 kg) WS-5: 56 lbs (25.5 kg)
WS-3: 40 lbs (18.2 kg) WS-6: 70 lbs (31.8 kg)
WS-4: 50 lbs (22.7 kg)

F.O.B. Cheyenne, WY 82007

*APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation.