

# **Top Mount Round Well** w/ Immersible Element

PRODUCT:

QUANTITY:

ITEM #:

Model: CH-11D

## **Designed Smart**

- Heavy-duty top mount insulated round drop-in food well designed for installation in metal, or wood countertop if optional wood mounting kit is provided.
- Hot Food Well is designed to accommodate a 11 qt. round inset.
- The CH-11D is suitable for wet operation only.
- Standard EZ lock reduces installation time.
- Large indicating pilot light.
- Immersible heating element provides quick recovery.

## **Built Solid**

- 20 ga. deep-drawn stainless steel well pans.
- The units are standard with complete UL construction including electrical conduit, bezel, and control box.
- Stainless steel drain coupling.
- Thermostatic control with 36" capillary (effective length 26").
- Compact housing overall depth 9 1/4".
- Multiple units can be installed in same table or counter.

#### Reliability backed by APW Wyott's Warranty

- All APW Wyott food wells are backed by a 1-year parts and labor warranty, including on-site service calls within 50 miles of authorized service technicians.
- · Certified by the following agencies:





## Options

- Wood mount kit 11 qt. (55323)
- Drain kit plus shut off valve (56420)
- Electrical code kit 72" includes bezel, conduit, junction box (55347)
- Lever operated shut-off valve (56360)

See reverse side for product specifications.



APW Wyott Foodservice Equipment Company · 729 Third Ave., Dallas, TX 75226 (800) 527-2100 · (214) 421-7366 · Fax (214) 565-0976 · www.apwwyott.com· info@apwwyott.com




PRODUCT:

# Top Mount Round Well w Immersible Element

Model: CH-11D

### Round Wells Hot Food Wells

QUANTITY:

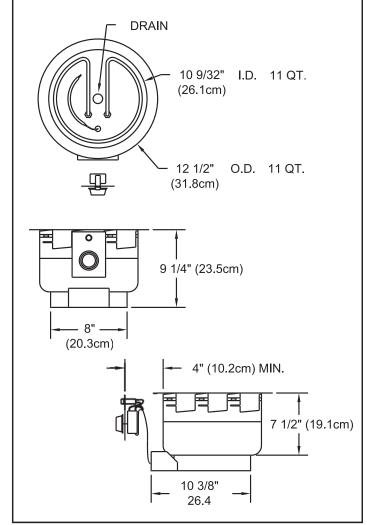

## **PRODUCT SPECIFICATIONS**

#### **Construction:**

ITEM #:

Well is constructed of one piece die-stamped 20 ga., Type 304 stainless steel. Stainless steel 1/2" NPT drain welded to bottom of pan provided with removable screen. Unit is heated by a tubular immersible calrod heating element. Unit standard with APW Wyott E-Z Locks for easy installation. 1" (2.5 cm) flange. Thermostatic control has 36" capillary (effective length 26").

#### **Electrical Specifications:**

120V, 1650W, 13.75Amps

#### **Overall Dimensions:**

12-1/2" Dia. x 9-1/4" D Outside: (31.8 cm x 23.5 cm) 10-9/32" Dia. x 7-1/2" D Inside: (26.1 cm x 19.1 cm) Cutout: 10-3/4" Dia. (27.3 cm) Wood Mount Kit Cutout: 12-13/16" Square (34.9 cm) 5-3/4"W x 6-1/4"H Control Cutout: (27.3cm x 15.9 cm) **Shipping Information:** 

Weight: 12 lbs. (5.5 kg)

F.O.B. / Dallas, TX 75226

\*APW Wyott reserves the right to modify specifications or discontinue models without incurring obligation.