

LINE: PRECISION SCALE

MODEL: GRS-500

PICTURE:



USE

- *Jewellers
- *Laboratories
- *Cosmetics manufacturers
- *Paint manufacturers
- *Cookie industry
- *Etc.

CAPACITY AND DIMENSIONS



MODEL	GRS-500
Capacity	500 gr / 1 lb / 16 oz / 2500 ct.
Minimum division	.1 g / 0.0002 lb / 0.005 oz / 0.5 ct
Plate diameter	5.6" / 14.34 cm

FEATURES

- High precision 0.1 gr minimum division
- Easy to calibrate
- Operates with AC/DC power adapter or a 9V battery (not included).
- Stainless steel plate very easy to clean.
- Toggles between g, lb, oz, ct.

LINE: PRECISION SCALE

MODEL: GRS-500 MODEL

BENEFITS	SPECIFICATIONS																												
 <p>MORE PROFITS Because its high precision technology, the GRS-500 scale helps you to increase your profits. 5000 divisions.</p>	<table border="1"> <thead> <tr> <th colspan="2" style="text-align: right;">GRS-500</th> </tr> </thead> <tbody> <tr> <td>Capacity</td> <td>500 g / 11lb / 16 oz / 2500 ct</td> </tr> <tr> <td>Minimum division</td> <td>.1g / 0.0002 lb / 0.005 oz / 0.5 ct</td> </tr> <tr> <td>Display</td> <td>Liquid Crystal Display (LCD) display</td> </tr> <tr> <td>Power supply</td> <td>110v/60hz (220v/50 hz Optional)</td> </tr> <tr> <td>Power supply adapter</td> <td>Included</td> </tr> <tr> <td>Car lighter adapter</td> <td>Optional</td> </tr> <tr> <td>Battery</td> <td>9V (Not included)</td> </tr> <tr> <td>Maximum tare</td> <td>500 g / 11lb / 16 oz / 2500 ct</td> </tr> <tr> <td>Plate diameter</td> <td>5.6" Inch (14.34 cm)</td> </tr> <tr> <td>Operation temperature</td> <td>14 to 104 °F (-10 to 40 °C)</td> </tr> <tr> <td>Storage Temperature</td> <td>-4 to 122 °F (-20 to 50 °C)</td> </tr> <tr> <td>Net weight</td> <td>2.1 lb / .96 kg</td> </tr> <tr> <td>Shipping weight</td> <td>6.6 lb/3 kg</td> </tr> </tbody> </table>	GRS-500		Capacity	500 g / 11lb / 16 oz / 2500 ct	Minimum division	.1g / 0.0002 lb / 0.005 oz / 0.5 ct	Display	Liquid Crystal Display (LCD) display	Power supply	110v/60hz (220v/50 hz Optional)	Power supply adapter	Included	Car lighter adapter	Optional	Battery	9V (Not included)	Maximum tare	500 g / 11lb / 16 oz / 2500 ct	Plate diameter	5.6" Inch (14.34 cm)	Operation temperature	14 to 104 °F (-10 to 40 °C)	Storage Temperature	-4 to 122 °F (-20 to 50 °C)	Net weight	2.1 lb / .96 kg	Shipping weight	6.6 lb/3 kg
	GRS-500																												
Capacity	500 g / 11lb / 16 oz / 2500 ct																												
Minimum division	.1g / 0.0002 lb / 0.005 oz / 0.5 ct																												
Display	Liquid Crystal Display (LCD) display																												
Power supply	110v/60hz (220v/50 hz Optional)																												
Power supply adapter	Included																												
Car lighter adapter	Optional																												
Battery	9V (Not included)																												
Maximum tare	500 g / 11lb / 16 oz / 2500 ct																												
Plate diameter	5.6" Inch (14.34 cm)																												
Operation temperature	14 to 104 °F (-10 to 40 °C)																												
Storage Temperature	-4 to 122 °F (-20 to 50 °C)																												
Net weight	2.1 lb / .96 kg																												
Shipping weight	6.6 lb/3 kg																												
 <p>HYGIENIC Plate is constructed of stainless steel , hygienic and easy to clean scale for an excellent presentation</p>																													

EASY CALIBRATION

Includes a calibration weight for calibration and adjustment of this scale at the time of relocate it anywhere of the world and to compensate the variation of the gravitational factors.



PORTABLE

The GRS-500 includes a protective case for easy transportation. A 9V battery (not included) allows this precision scale to operate in areas without electricity.




EASY TO READ DISPLAY

Alphanumeric liquid crystal display



PROTECTIVE CASE FOR EASY TRANSPORTATION

Includes
Calibration weight
Power supply adapter
User manual
Calibration manual
Gloves

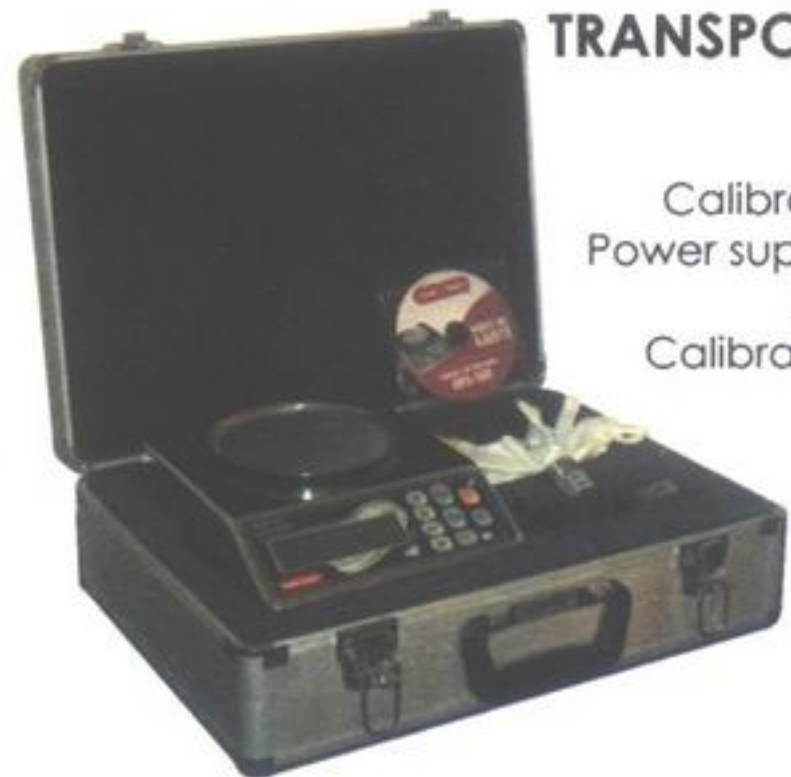


OPTIONAL ACCESORIES



Car lighter adapter
To plug in the scale

**Toggles
between
kg, lb,
oz & ct.**

DIMENSIONS

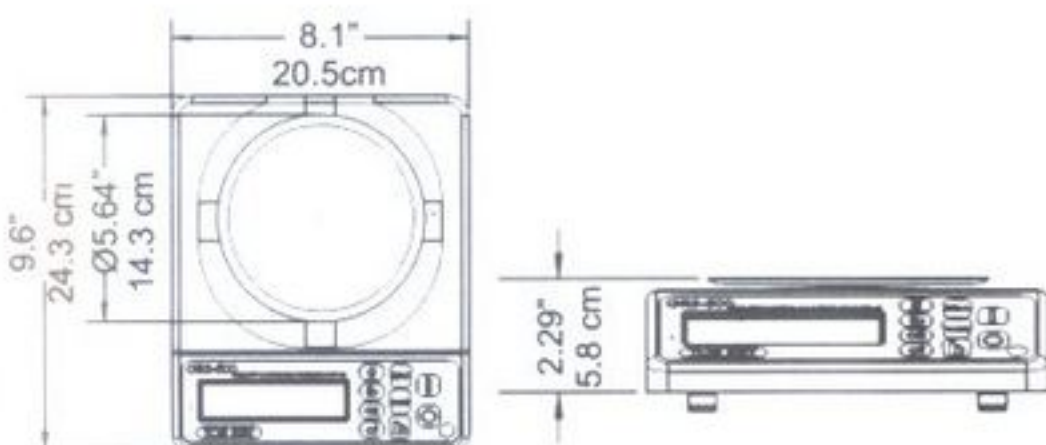

NOM

DISTRIBUTED BY

