



A JohnsonDiverney Company

CMA-44HHigh Temperature
44" Conveyor
Dishwasher

Item. # _____


Spec. # _____



Optional motor cover.

FEATURES:


- 205 racks / 820 covers per hour.
- Economical to operate. Uses only .94 gallons of water per cycle.
- Unique 3-stage washing process provides pre-wash, power wash and final rinse all in a 44" machine.
- Automatic soil purging system filters wash water and traps plate debris into an external tray. Tray can be easily removed for dumping contents.
- Heavy duty 12 and 14 gauge 304 stainless steel construction offers durable performance and years of trouble free operation.
- Built-in chemical resistant industrial 10kW heater is proven to be more durable than commercial style heaters.
- Large 19" high opening accommodates larger items and utensils.
- Auto start/stop makes operation safe and easy.
- Includes table limit switch and rack saver arm that protect the machine, dishracks and table from damage.
- Two speed settings available for optimum cleaning performance.




Rack saver arm protects the machine, dishracks and table from damage.



3-stage washing process provides pre-wash, power wash and final rinse all in a 44" machine.



Large 19" high opening accommodates larger items and utensils.



Shown with optional corner feed table. Available right or left.



Shown with optional vent hoods and damper controls.



Top mounted controls include easy to read temperature gauges and complete operating instructions.

CMA Dishmachines 12700 Knott Avenue Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

Lit#0109

Printed in the U.S.A.

© 2002 CMA, Inc.




A JohnsonDineer Company

CMA-44H

High Temperature
44" Conveyor
Dishwasher

WARNING: Electrical and plumbing connections need to be made by a qualified Service Person who will comply with all available federal, state, and local Health, Electrical, Plumbing and Safety codes.

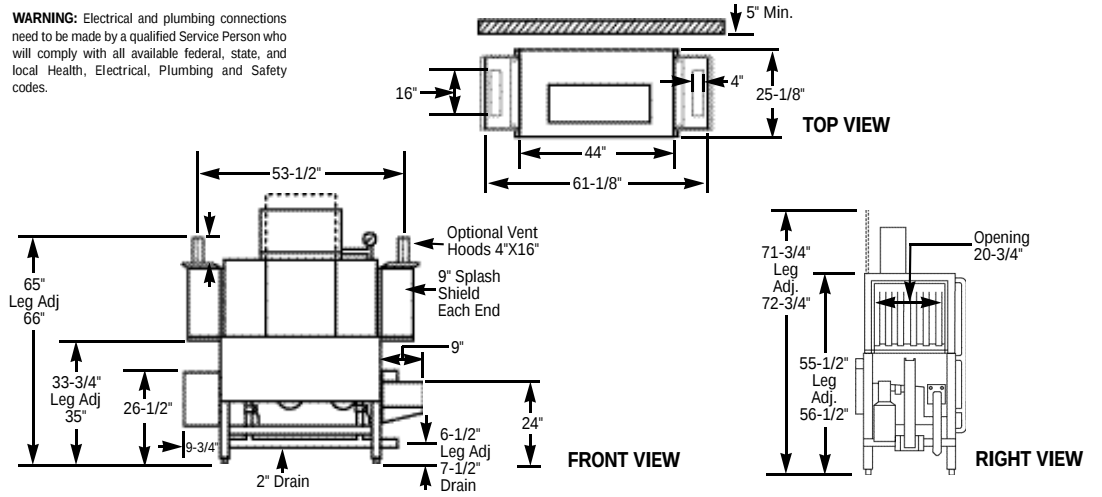**Specifications:**

MODEL CMA-44H	USA	METRIC		USA	METRIC
OPERATING CAPACITY			DIMENSIONS		
RACKS PER HOUR (NSF RATED)	205	205	DEPTH	25-1/8"	(64cm)
CONVEYOR SPEED	5.7 FT./MIN.	(174 CM/MIN.)	WIDTH	44"	(111.7cm)
DRAIN	2"	-	HEIGHT	55-1/2"-56-1/2"	(140.97-143.51cm)
CONVEYOR MOTOR HP	1/3	1/3	STANDARD TABLE HEIGHT	34"	(86cm)
WASH PUMP MOTORS HP (2)	1	1	MAX HEIGHT CLEARANCE FOR DISHES	19"	(48cm)
WATER INLET - FILL	3/4"	-	STANDARD DISHRACK		
WATER INLET - FINAL RINSE	1/2"	-	DIMENSIONS		
WASH TANK CAPACITY				19-3/4"X19-3/4"	(50X50cm)
PRE-WASH	4.25 GAL	(16.0 L)	ELECTRICAL RATING		
WASH	11.75 GAL	(44.5 L)	VOLTS	PHASE	AMPS
TOTAL	16.0 GAL	(60.5 L)	208	1	61
WASH PUMP CAPACITY			240	1	65
EACH	73 GPM	(276 LPM)	208	3	38
OPERATING TEMPERATURE			240	3	42
WASH - °F (MIN)	150°F-160°F	(68°C-71°C)	BOOSTER HEATER		
FINAL RINSE - °F (MIN)	180°F-195°F	(82°C-90°C)	10kW		
WATER CONSUMPTION			SPECIFY DIRECTION OF RACK TRAVEL (RIGHT TO LEFT, LEFT TO RIGHT) WHEN ORDERING		
PER RACK (RINSE)	.94 GAL	(3.6 L)	CMA-44H EXHAUST VENTILATION REQUIREMENTS AT 100% CAPACITY CFM		
PER HOUR (RINSE)	192 GPH	(726.6 LPH)	ENTRANCE/END 200 MAX	DISCHARGE END 400 MAX	TOTAL CFM 600 MAX
			SHIPPING WEIGHT		
			APPROXIMATE	662#	(300kg)

Summary Specifications: Model CMA-44H

The Model CMA-44H high temperature conveyor dishwasher meets NSF, UL, and CUL sanitation and construction standards utilizing 180°F final rinse water. The CMA-44H performs three separate washing functions including a built-in pre-wash, all in a 44" space. The CMA-44H washes up to 205 racks per hour and uses a minimum .94 gallons of water per rack while achieving sparkling, clean, dry dishes.

Available Models

- CMA-44H R/L Right to Left
- CMA-44H L/R Left to Right

Available Options

- Corner Feed Table
- Vent Hood with 4" x 16" Vent and Damper Control (2 per set)
- Alternative electrical options
- C-24 Hatco Booster Heater (40° rise), other sizes available
- Also available at 167 racks/hr
- Stainless steel dishtables
- Auto Fill
- Motor Cover
- Drain Water Tempering Kit

CMA Dishmachines 12700 Knott Avenue Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

Lit#0109

Printed in the U.S.A.

© 2002 CMA, Inc.