



A JohnsonDiverney Company

**CMA-66L**Chemical Sanitizing
66" Conveyor
Dishwasher

Item. # _____

Spec. # _____

**FEATURES:**


- 242 racks / 968 covers per hour.
- Economical to operate. Uses only .8 gallons of water per cycle.
- Four-stage washing process provides pre-wash, dual power wash and final rinse all in a 66" machine.
- Unique soil purging system filters wash water and traps plate debris into an external tray. Tray can be easily removed for dumping contents.
- Heavy duty 12 and 14 gauge 304 stainless steel construction offers durable performance and years of trouble free operation.
- Built-in chemical resistant industrial 10kW heater is proven to be more durable than commercial style heaters.
- Large 19" high opening accommodates larger items and utensils.
- Auto start/stop makes operation safe and easy.
- Includes table limit switch and rack saver arm that protect the machine, dishracks and table from damage.
- Three speed settings available for optimum cleaning performance.




Rack saver arm protects the machine, dishracks and table from damage.



Four-stage washing process provides pre-wash, power wash and final rinse all in a 66" machine.



Large 19" high opening accommodates larger items and utensils.



Shown with optional corner feed table. Available right or left.



Easy to remove wash arms with captive end caps. **Never lose another end cap again!**



Top mounted controls include easy to read temperature gauges and complete operating instructions.

AIA # _____

CMA Dishmachines 12700 Knott Avenue Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

Lit#0109

Printed in the U.S.A.

© 2003 CMA, Inc.



Energy
MIZER®


A JohnsonDiverney Company

CMA-66L

Chemical Sanitizing
66" Conveyor
Dishwasher

WARNING: Electrical and plumbing connections need to be made by a qualified service person who will comply with all available Federal, State, and Local Health, Electrical, Plumbing and Safety codes.

Spec. #

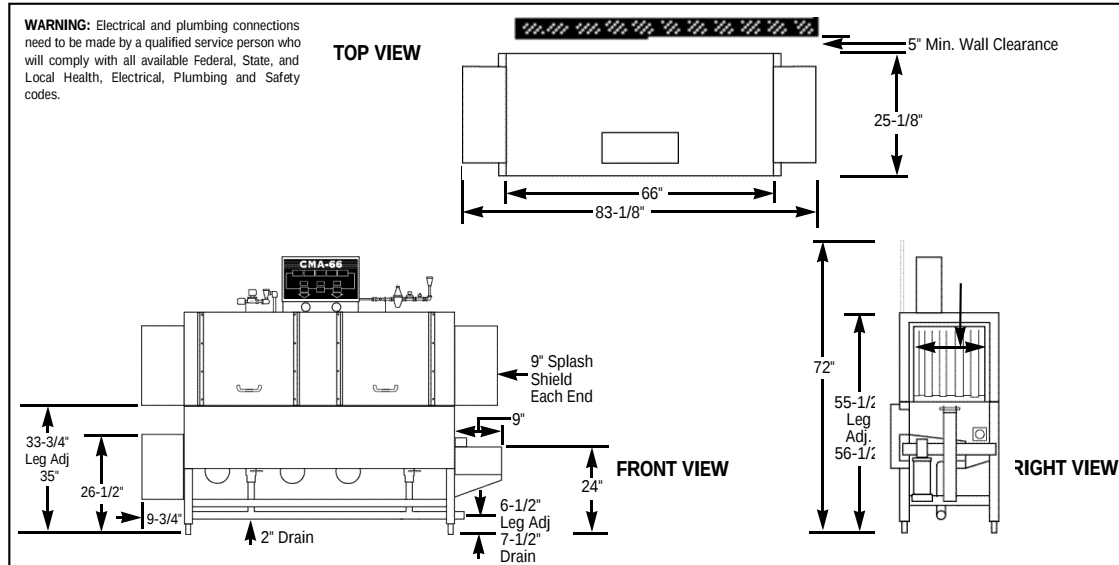

Specifications:

MODEL CMA-66L	USA	METRIC	USA	METRIC
OPERATING CAPACITY				
RACKS PER HOUR (NSF RATED)	242	242		
CONVEYOR SPEED	6.75 FT./MIN.	(206 CM/MIN.)		
DRAIN	2"	-		
(3) WASH PUMP MOTORS HP	1	1		
CONVEYOR MOTOR HP	1/3	1/3		
WATER INLET - FILL	3/4"	-		
WATER INLET - FINAL RINSE	1/2"	-		
WASH TANK CAPACITY				
PRE-WASH	5.25 GAL	(20.0 L)		
WASH	13.25 GAL	(50.0 L)		
TOTAL	18.5 GAL	(70 L)		
WASHPUMP CAPACITY				
EACH	38 GPM	(143.8 LPM)		
OPERATING TEMPERATURE				
WASH	140°F-150°F	(60°C/65.5°C)		
FINAL RINSE	140°F-150°F	(60°C/65.5°C)		
WATER CONSUMPTION				
PER RACK (FINAL RINSE)	.8 GAL	(3 L)		
PER HOUR (FINAL RINSE)	192 GPH	(726.8 LPH)		

Summary Specifications: Model CMA-66L

The Model CMA-66L low energy, chemical sanitizing conveyor dishwasher meets NSF, UL, and CUL sanitation and construction standards WITHOUT the use of a BOOSTER HEATER. The CMA-66L performs three separate washing functions including a built-in pre-wash, all in a 66" space. The CMA-66L washes up to 242 racks per hour and uses a minimum .8 gallons of water per rack while achieving sparkling, clean, dry dishes.

Available Models

- CMA-66LR/Left to Right
- CMA-66LL/Right to Left

Available Options

- Corner Feed Table
- Alternative electrical options
- Also available at 205 or 167 racks/hr
- Stainless steel dishtables
- Auto Fill
- Vent Hood with 4" X 16" Vent and Damper Control (2 per set)
- Motor Cover

CMA Dishmachines 12700 Knott Avenue Garden Grove, CA 92841 • 800-854-6417 • 714-898-8781 • Fax: 714-895-2141 • www.cmadishmachines.com

CMA reserves the right to modify specifications or discontinue models without prior notification.

Lit#0109

Printed in the U.S.A.

© 2003 CMA, Inc.

AIA #