



A JohnsonDiverney Company



L-1X
Chemical Sanitizing Undercounter Dishwasher

Item. # _____



FEATURES:

- 24 racks / 96 covers per hour.
- Economical to operate. Uses only 1.7 gallons of water per cycle.
- All heavy duty 304 stainless steel construction assures long life and years of trouble free operation.
- Unique spray arm system features upper and lower stainless steel wash arms with reinforced end caps.
- Built-in chemical pumps and delimiting system assures proper chemical usage.
- Convenient to service "Works-in-a-drawer". All electrical components are attached to a sliding drawer for easy access and service.
- Pumped drain allows for flexible installation. Requires no floor drain.
- Pump purging system improves results by eliminating soil and chemical carryover during rinse cycle.



Spec. # _____



Optional dishtable, faucet and pre-rinse unit sold separately.



Pumped drain will drain uphill. Requires no floor drain.



Upper and lower rotating wash arms guarantee excellent results.



Convenient to service "Works-in-a-drawer", may be removed by unplugging one electrical connection.




Optional pedestal allows the L-1X to be raised up to a full 12" off the floor for easy operator use. Height adjustable from 8" to 12".

AIA # _____



L-1X
Chemical Sanitizing Undercounter Dishwasher

A JohnsonDiversey Company

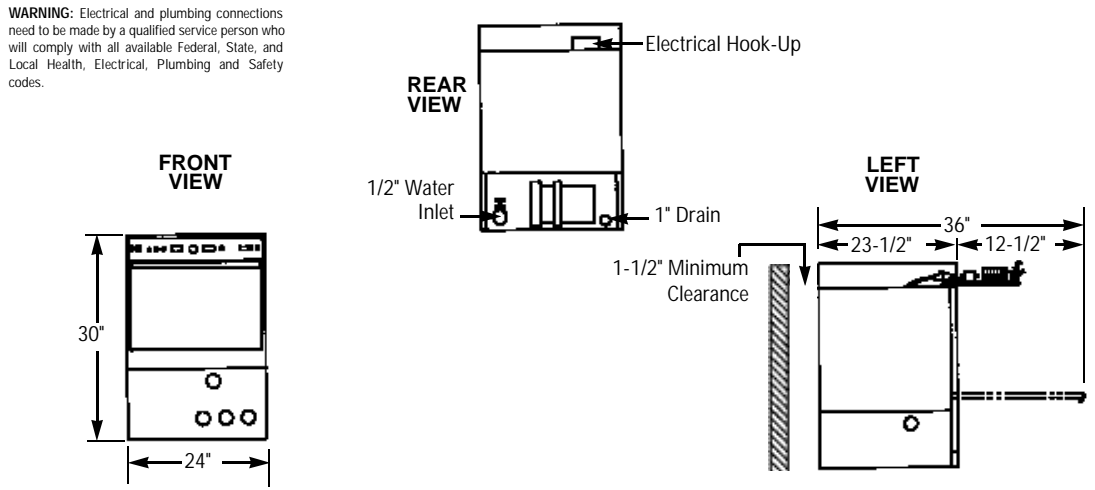

Spec. #

Specifications:

MODEL L-1X	USA	METRIC		USA	METRIC
OPERATING CAPACITY			WASH PUMP MOTORS HP	1	1
RACKS PER HOUR (NSF RATED)	24	24	DIMENSIONS		
OPERATING CYCLE			DEPTH	26"	(66cm)
WASH TIME-SEC	57	57	WIDTH	24"	(61cm)
RINSE TIME-SEC	48	48	HEIGHT	30"	(76.2cm)
DWELL/PURGE-SEC	15	15	MAXIMUM CLEARANCE		
TOTAL CYCLE TIME	120	120	HEIGHT FOR DISHES	12-1/8"	(31cm)
WASH TANK CAPACITY	1.7 GAL.	(6.43 L)	STANDARD DISHRACK	1	1
WASH PUMP CAPACITY	35 GPM	(132 LPM)	DIMENSIONS	19-3/4"X19-3/4"	(50X50cm)
OPERATING TEMPERATURE			ELECTRICAL RATING	VOLTS	AMPS
REQUIRED	120°F	(49°C)		115	16
RECOMMENDED	140°F	(60°C)	SHIPPING WEIGHT		
WATER CONSUMPTION			APPROXIMATE	190#	(86kg)
PER RACK	1.7 GAL.	(6.43 L)			
PER HOUR	40.8 GPH	(154 LPH)			
WATER INLET	1/2"	-			
DRAIN	1"	-			

Summary Specifications: Model L-1X

CMA Energy Mizer model L-1X low temperature, undercounter, chemical sanitizing, commercial dishwasher meets NSF, UL and CUL sanitation and construction standards WITHOUT the use of BOOSTER or TANK HEATERS. The model L-1X is constructed entirely of 304 stainless steel. Each unit automatically washes, rinses and sanitizes food service utensils in standard 19-3/4"X19-3/4" racks. Unit comes standard with upper and lower stainless steel wash arms. The L-1X incorporates a pump purging system that improves results by eliminating soil and chemical carryover during rinse cycle.

Available Options

- Sustainer Heater
- Sanitizer Alarm
- CMA Temp-Sure™ (Self contained 12kW heater)
- Stainless Steel Legs 6" (set of 4)
- Stainless Steel Pedestal
- 48" Undercounter dishtable
- Alternative electrical available for export

AIA #