




Model CR500, CR800, CR1200, CR1400, CR2400

Remote Air-Cooled Condenser

Features:

- Weather proof housing
- High-efficient copper and aluminum condenser
- Saves energy
- Reduces air conditioning requirements
- Eliminates heat and noise from ice maker location

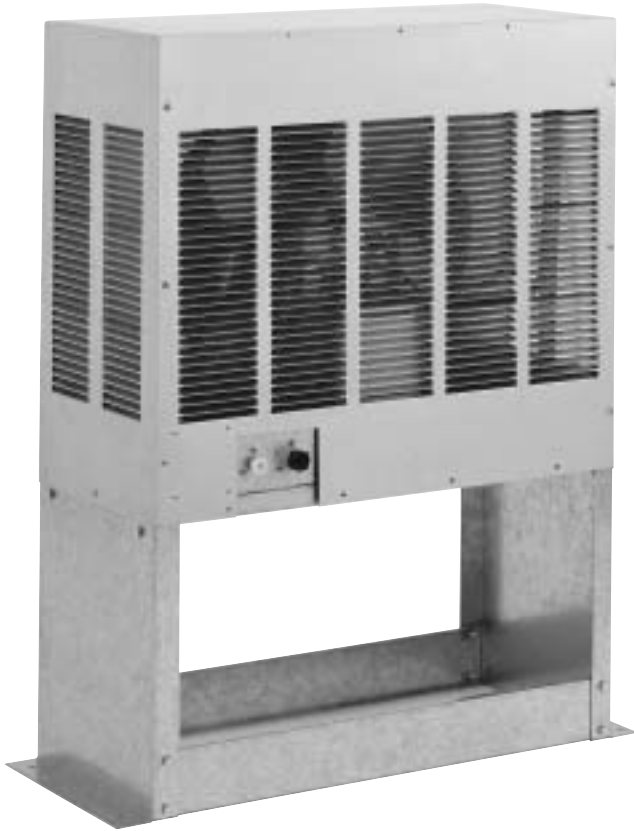



Model CR500, CR800, CR1200, CR1400, CR2400

Technical Specifications:

Refrigerant: R-404a

Circuit Capacity: 20A

Maximum Fuse Size: 20A (HVac circuit breaker required)

Electrical rating:

CR500: 115V / 60Hz / 3.0A / single phase

CR800 / CR1200 / CR1400 / CR2400: 208 - 230V /
60 Hz. / 2.0A / single phase

Condenser Finish: Galvanized

Dimensions:

CR500:	Width: 18.25"	Depth: 13.75"	Height: 34.25"
CR800:	Width: 28.5"	Depth: 13.25"	Height: 40.125"
CR1200:	Width: 28.5"	Depth: 13.25"	Height: 40.125"
CR1400:	Width: 28.5"	Depth: 13.25"	Height: 40.125"
CR2400:	Width: 28.5"	Depth: 15.0"	Height: 37.75"

Weight:

CR500: 68 lbs. (31 kgs.)

CR800: 90 lbs. (41 kgs.)

CR1200: 105 lbs. (48 kgs.)

CR1400: 115 lbs. (52 kgs.)

CR2400: 114 lbs. (51.8 kgs.)

Shipping Weight:

CR500: 72 lbs. (33 kgs.)

CR800: 100 lbs. (45 kgs.)

CR1200: 115 lbs. (52 kgs.)

CR1400: 130 lbs. (59 kgs.)

CR2400: 125 lbs. (56.4 kgs.)

Refrigerant Line Specifications:

Vertical Drop: 15' max (4.6 m)



Vertical Lift: 35' max (10.7 m)

Maximum Length: 55' (16.8m)

Tube Size: 3/8" O.D. (8 cm)

Remote Tubing Kits Optional: 30' (6.1m), 35' (10.7 m), 55' (16.7 m)

Agency Listings:

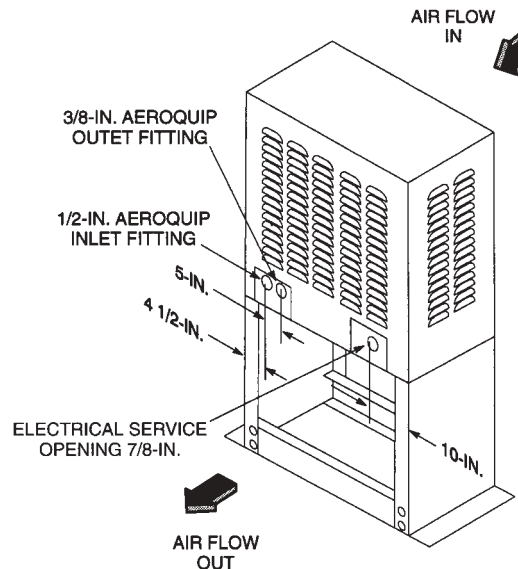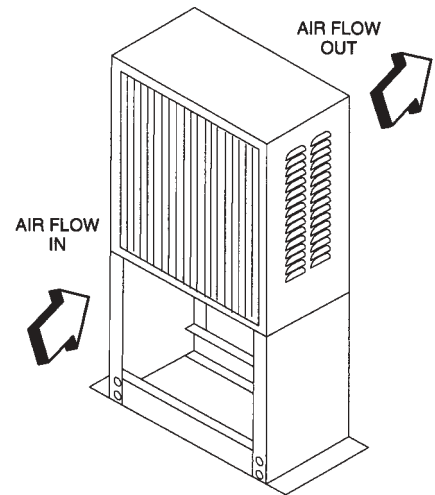

Part No.	Description	For use with cuber model numbers
631700602	Condenser Model CR500	XRC522/XRC530
631700600	Condenser Model CR800	XRC630/XRC830
631700601	Condenser Model CR800	XRC630/XRC830 E50
631700512	Condenser Model CR1201	Pinnacle FCB
631700700	Condenser Model CR1200	XRC1030/XRC1230/WCC2000/WCF2200
631700701	Condenser Model CR1200	XRC1030/XRC1230 E50
631700800	Condenser Model CR1400	XRC1444
631700801	Condenser Model CR1400	XRC1444E50
631700900	Condenser Model CR2400	IRC2448/XRC1844



For more information
or to place an order,
contact your sales
representative or
authorized distributor.

www.cornelius.com

In the US:

Phone: 1-800-238-3600

Fax: 1-800-535-4235

Outside the US:

Phone: 1-763-421-6120

Fax: 1-763-422-3297

IMI Cornelius Inc.

One Cornelius Place
Anoka, MN 55303-6234
USA