



# C-101BAH-(AD)DS

Self-Contained Cubelet Ice Machine  
with Built-In Sotrage Bin



C-101BAH-(AD)DS  
04/25/2017  
Item # 13324

## W x D x H

C-101BAH / C-101BAH-DS  
14<sup>7</sup>/<sub>8</sub>" x 22<sup>5</sup>/<sub>8</sub>" x 33<sup>1</sup>/<sub>2</sub>"

C-101BAH-AD / C-101BAH-ADDS  
14<sup>7</sup>/<sub>8</sub>" x 22<sup>5</sup>/<sub>8</sub>" x 31<sup>1</sup>/<sub>2</sub>"

(-AD) - ADA Compliant 

(-DS) - Customized Cabinet Door System



**C-101BAH ★**  
Air-Cooled  
(Shown)

**C-101BAH-AD ★**  
Air-Cooled  
ADA Compliant Unit



**C-101BAH-DS★ ★**  
(Shown)  
with Custom Cabinetry

**C-101BAH-ADDS★ ★**  
Air-Cooled  
ADA Compliant Unit

*\*Customer responsible for providing cabinetry*



Item #: \_\_\_\_\_  
Project: \_\_\_\_\_  
Qty: \_\_\_\_\_  
AIA#: \_\_\_\_\_

## Features

- ▶ Durable stainless steel exterior
- ▶ Approved for indoor our outdoor use
- ▶ Stainless steel auger with greaseless bearing


- Up to 92 lbs. of ice production per 24 hours and up to 20 lbs.\* of built-in storage
- Mount two units, side-by-side, in only 44" of floor space for double the amount of ice production
- Front access provides ease of cleaning and maintenance
- Front in and out airflow
- Equipped with 6 ft. Cord with NEMA 5-15 Plug
- R-134A Refrigerant

### Warranty:

2 Year Parts & Labor on entire machine.  
1 Year Parts & Labor on HS-5061 Drain Pump Assembly.  
Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

		ICE PRODUCTION			WATER USAGE		ELECTRICAL						
Condenser	Model	Air / Water Temp Lbs. per 24 hours 70°/ 50°F    90°/ 70°F		Type of Ice (Hardness Rating)	Potable Gal. per 100 lbs. 90°/ 70°F	Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/ 70°F	Max. Fuse Size or HACR Circuit Breaker	Amperage	Voltage	Heat Rejection BTU/hr.	Shipping Weight	ENERGY STAR®
Air-Cooled	C-101BAH-(DS)	92	62	Cubelet (81.6)	12.0	N/A	12.1	15A	4.0A	115V/60/1	1,850	120 lbs.	★
Air-Cooled	C-101BAH-AD-(DS)	92	62	Cubelet (81.6)	12.0	N/A	12.1	15A	4.0A	115V/60/1	1,850	120 lbs.	★

## Cubelet Dimensions\*



\* approximate size in inches, image not to scale

## Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 90°F
- Water Pressure 7 - 113 PSIG
- Voltage Range 104-127V

## Service

- Allow 15" (38 cm) at front and enough space at rear for water supply and drain connections.
- Location must provide a firm and level foundation.
- Do not place near ovens, grills or other high heat producing equipment.

## Parts

- -DS Door Reversal Part - HS-0229  
Optional Kit required for (-DS) models
- Side trim kit available
- Accessory - HS-5061 Drain Pump Assembly
- Water filter - H9320-51

## Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 1/2" Nominal ID Hard Pipe or Equivalent




# C-101BAH-(AD)DS

Self-Contained Cubelet Ice Machine  
with Built-In Sotrage Bin




C-101BAH-(AD)DS  
04/25/2017  
Item # 13324

## FRONT VIEW

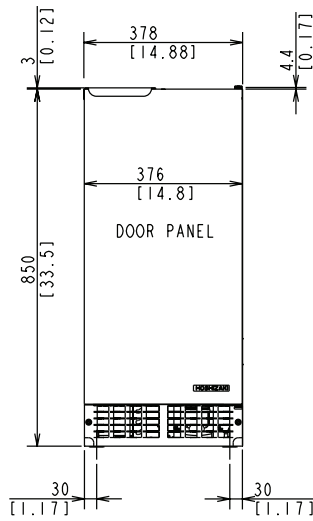


C-101BAH/C-101BAH-DS

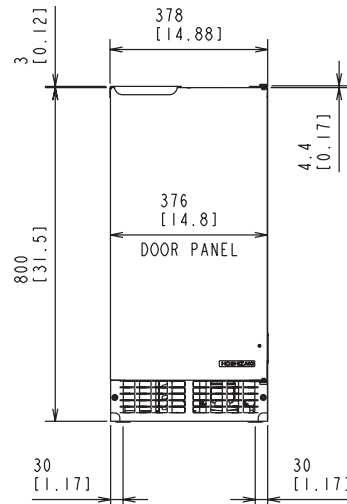


C-101BAH-AD/C-101BAH-ADDS

## TOP VIEW

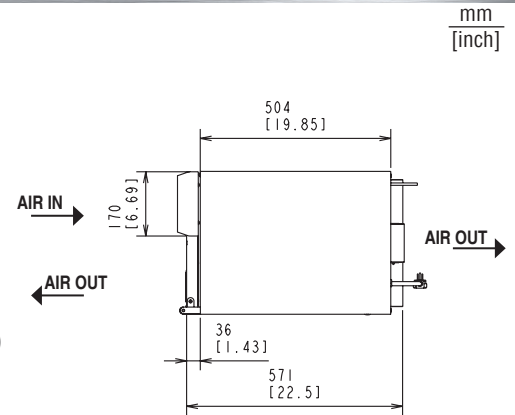


C-101BAH  
C-101BAH-AD  
C-101BAH-DS  
C-101BAH-ADDS

## REAR VIEW

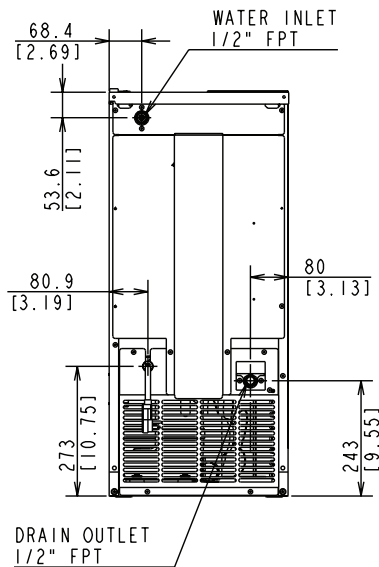


C-101BAH/C-101BAH-DS

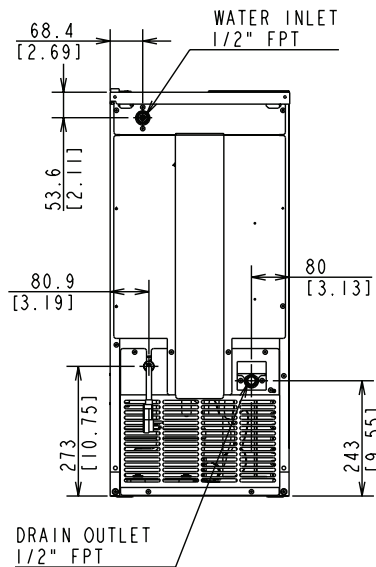


C-101BAH-AD/C-101BAH-ADDS

## SIDE VIEW

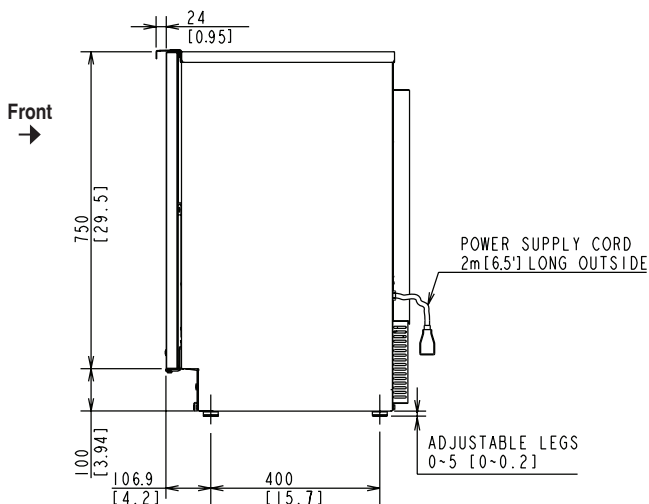

C-101BAH/C-101BAH-DS

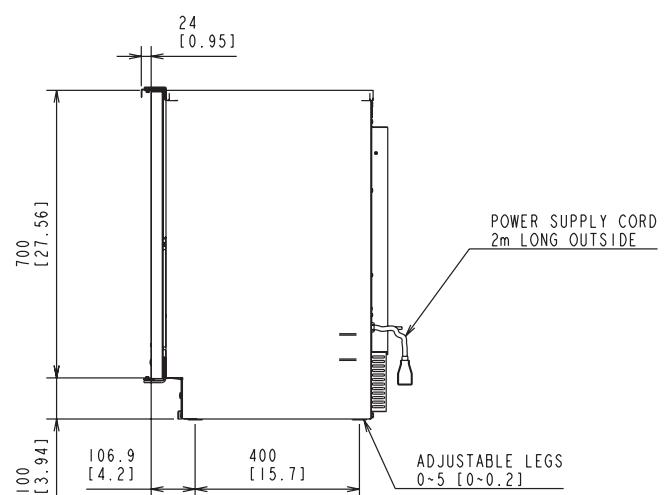

C-101BAH-AD/C-101BAH-ADDS