



**Bid Specifications:**

The Convenience Merchandiser shall be Merco model \_\_\_\_\_ rated at \_\_\_\_\_ watts, \_\_\_\_\_ volts, single phase, and be \_\_\_\_\_ inches in overall width.

Convenience Merchandiser

# Convenience Merchandiser

## Models

- CMD1-H\_\_
- CMD2-H\_\_
- CMD1-S\_\_
- CMD2-S\_\_



## Standard Features

- All models have pre-focused infrared top heat directing heat to the outer edges of the holding surface where heat loss is the greatest.
- Warmers feature a thermostatically-controlled, hard coated heated base and cord and plug set.
- Coated shatter-resistant incandescent lights enhance product display while safeguarding food products from bulb breakage.
- An optional Indicating Temperature Control enhances accurate control of temperature and provides digital readout of temperatures.

## Accessories

- Flip-up Doors on One Side (24" thru 41"W (610-1041 mm) models)
- Split Flip-up Doors on One Side 52" and 60"W (1321-1524 mm) models
- Display Sign Holder (Signs not included)-Top or Intermediate Shelf
- 4" (102 mm) Adjustable Legs (Standard on units over 36" (914 mm) in length or weighing more than 80 lbs. (36 kg.))
- Additional Stainless Steel Divider Rods

## Description

The Merco Merchandising Display Warmer is the perfect unit to merchandise hot fast foods. Designed specifically to hold hot wrapped or boxed product, this unit holds hot food safely at proper serving temperatures. Merchandising Warmers have pre-focused infrared top heat and thermostatically-controlled hard coated heated base to extend the holding times of most food.

Hard coated shelves, adjustable dividers, shatter-resistant incandescent display lights, and 6' (1829 mm) cord with plug are standard.

### Flexibility

This warmer offers the convenience of self-serve and efficiency of kitchen-to-server holding. Available with horizontal shelves, the Merco Merchandising Display Warmers are offered in both single and dual shelf models. Slant

shelves are offered in single and dual models. All models are made of extruded aluminum and sturdy stainless steel with tempered glass end panels. Specially coated incandescent lights illuminate the food holding area. Alternative control locations make placement of merchandiser on front or back serving counters possible.

Slant models 30" (762 mm) and wider will accommodate 18" x 26" (457 x 660 mm) sheet pans.

### Merco Guarantee:

Merco equipment is guaranteed to be free from quality problems in materials and workmanship for a period of one (1) year from the date of purchase, or eighteen (18) months from the date of shipment from factory, whichever comes first. The heating elements are warranted for two (2) years. Parts carry a two (2) year warranty from date of purchase.



## Models

- CMD1-H\_\_
- CMD2-H\_\_
- CMD1-S\_\_
- CMD2-S\_\_

1111 N. Hadley Rd.  
P.O. Box 1229  
Ft. Wayne, IN 46801-1229


Tel: 888.417.5462  
Fax: 800.285.9511

www.mercoproducts.com




**Horizontal Models - Single Shelf**

| Model                 | Width         | Watts | Amps* | Plug Type    | Shipping Weight   |
|-----------------------|---------------|-------|-------|--------------|-------------------|
| CMD1-H24              | 24" (610 mm)  | 830   | 6.9   | NEMA 5-15P   | 51 lbs. (23 kg)   |
| CMD1-H30              | 30" (762 mm)  | 970   | 8.1   | NEMA 5-15P   | 58 lbs. (26 kg)   |
| CMD1-H36              | 36" (914 mm)  | 1170  | 9.8   | NEMA 5-15P   | 66 lbs. (30 kg)   |
| CMD1-H41 <sup>A</sup> | 41" (1041 mm) | 1340  | 11.2  | NEMA 5-15P   | 74 lbs. (36 kg)   |
| CMD1-H52 <sup>A</sup> | 52" (1321 mm) | 1760  | 14.7  | NEMA 5-15P   | 86 lbs. (39 kg)   |
| CMD1-H60 <sup>A</sup> | 60" (1524 mm) | 2100  | 15.0† | NEMA L14-20P | 198 lbs. (90 kg)‡ |




**Horizontal Models - Dual Shelf**

| Model                 | Width         | Watts | Amps* | Plug Type  | Shipping Weight    |
|-----------------------|---------------|-------|-------|------------|--------------------|
| CMD2-H24 <sup>A</sup> | 24" (610 mm)  | 1660  | 13.8  | NEMA 5-15P | 90 lbs. (41 kg)    |
| CMD2-H30 <sup>A</sup> | 30" (762 mm)  | 1920  | 16    | NEMA 5-15P | 100 lbs. (45 kg)   |
| CMD2-H36 <sup>A</sup> | 36" (914 mm)  | 2340  | 9.5†  | NEMA 5-15P | 112 lbs. (51 kg)   |
| CMD2-H41 <sup>A</sup> | 41" (1041 mm) | 2680  | 11.2† | NEMA 5-15P | 126 lbs. (57 kg)   |
| CMD2-H52 <sup>A</sup> | 52" (1321 mm) | 3520  | 14.7† | NEMA 5-15P | 150 lbs. (68 kg)   |
| CMD2-H60 <sup>A</sup> | 60" (1524 mm) | 4200  | 17.5† | NEMA 5-15P | 268 lbs. (122 kg)‡ |




**Slant Models - Single Shelf**

| Model                 | Width         | Watts | Amps* | Plug Type  | Shipping Weight  |
|-----------------------|---------------|-------|-------|------------|------------------|
| CMD1-S24              | 24" (610 mm)  | 695   | 5.8   | NEMA 5-15P | 72 lbs. (33 kg)  |
| CMD1-S30              | 30" (762 mm)  | 790   | 6.6   | NEMA 5-15P | 80 lbs. (36 kg)  |
| CMD1-S36 <sup>A</sup> | 36" (914 mm)  | 935   | 7.8   | NEMA 5-15P | 92 lbs. (42 kg)  |
| CMD1-S41 <sup>A</sup> | 41" (1041 mm) | 1090  | 9.1   | NEMA 5-15P | 96 lbs. (44 kg)  |
| CMD1-S52 <sup>A</sup> | 52" (1321 mm) | 1400  | 11.7  | NEMA 5-15P | 102 lbs. (46 kg) |
| CMD1-S60 <sup>A</sup> | 60" (1524 mm) | 1715  | 14.3  | NEMA 5-15P | 108 lbs. (49 kg) |

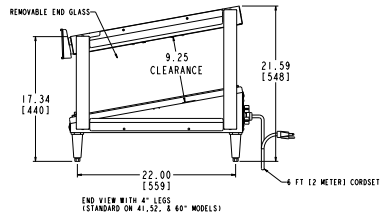

**Slant Models - Dual Shelf**

| Model                 | Width         | Watts | Amps* | Plug Type  | Shipping Weight   |
|-----------------------|---------------|-------|-------|------------|-------------------|
| CMD2-S24 <sup>A</sup> | 24" (610 mm)  | 1355  | 11.3  | NEMA 5-15P | 128 lbs. (58 kg)  |
| CMD2-S30 <sup>A</sup> | 30" (762 mm)  | 1530  | 12.8  | NEMA 5-15P | 140 lbs. (64 kg)  |
| CMD2-S36 <sup>A</sup> | 36" (914 mm)  | 1810  | 15.1  | NEMA 5-15P | 158 lbs. (72 kg)  |
| CMD2-S41 <sup>A</sup> | 41" (1041 mm) | 2120  | 9.1†  | NEMA 5-15P | 178 lbs. (81 kg)  |
| CMD2-S51 <sup>A</sup> | 52" (1321 mm) | 2725  | 11.7† | NEMA 5-15P | 205 lbs. (93 kg)  |
| CMD2-S60 <sup>A</sup> | 60" (1524 mm) | 3340  | 14.3† | NEMA 5-15P | 238 lbs. (108 kg) |



\* Based on 120 volts.

† Includes crating.

‡ Based on 120/208 volts, 120/240 volts.

<sup>A</sup> NSF requires units over 36" (914 mm) in width or weighing more than 80 lbs. (36 kg) to be either sealed, or raised on the installation surface with the 4" (102 mm) legs included.

**Dimensions:**

**Horizontal models -**

Single: 24"-36" W x 19½" D x 12½" H (610-914 x 495 x 308 mm)

41"-60" W x 19½" D x 15½" H (610-1524 x 495 x 384 mm)

Dual: 24"-60" W x 19½" D x 25½" H (610-1524 x 495 x 348 mm)

**Slant models -**

Single: 24"-30" W x 24" D x 17½" H (610-762 x 610 x 447 mm)


36"-60" W x 24" D x 20½" H (914-1524 x 610 x 524 mm)

Dual: 24"-60" W x 24" D x 32½" H (610-1524 x 610 x 911 mm)

**Cord Location:**


CMD\_\_-H\_\_: Left corner, towards sever side.

CMD\_\_-S\_\_: Control side at right base corner.



**Options (Not for retrofit)**

- Indicating Temperature Control (ITC)
- Halogen Bulbs in lieu of Standard Display Lights

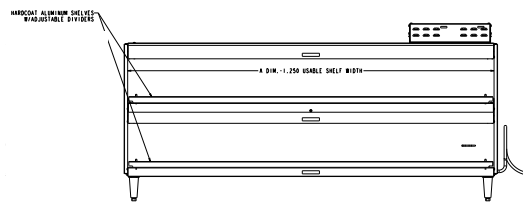

**Divider Rods**

| Model Width   | Number of Divider Rods Provided per Shelf | Average Chute Width |
|---------------|---|---------------------|
| 24" (610 mm)  | 5 Rods                                    | 3¾" (95 mm)         |
| 30" (762 mm)  | 6 Rods                                    | 4¼" (108 mm)        |
| 36" (914 mm)  | 7 Rods                                    | 4½" (114 mm)        |
| 41" (1041 mm) | 8 Rods                                    | 4½" (114 mm)        |
| 52" (1321 mm) | 10 Rods                                   | 4 5/8" (117 mm)     |
| 60" (1524 mm) | 12 Rods                                   | 4½" (114 mm)        |

Designs and specifications subject to change without notice.

Models

- CMD1-H\_
- CMD2-H\_
- CMD1-S\_
- CMD2-S\_