

Non-Refrigerated Self-Service Pastry Case



MODEL SHOWN: CSF4231

NOTE: TRAYS NOT PROVIDED WITH CASE

☐ CSF4231 42"L x 36 1/2"D x 65 1/4"H

STANDARD FEATURES


- Electrical connect-12" straight blade power cord
- Warranty-One year parts & labor warranty
- Interior-Black interior
- Light switch-Light switch in base
- Light-T-5 side light(s)
- Trim-Black trim
- Shelves-Shelving removable and adjustable on 1" centers
- Upper front- Glass swinging front doors
- Trays-Holds (8) 18x26 trays
- Shelves-Tray support, non-lighted shelves
- Ends-Glass end

	STANDARD SPECIFICATION	OPTION(s)
GRAPHICS, FRONT DOOR	<input type="checkbox"/> Glass swinging front doors	<input type="checkbox"/> Front Doors w/graphics
GRAPHICS, HEADER	<input type="checkbox"/> No sign	<input type="checkbox"/> Sign, Plain <input type="checkbox"/> Sign w/graphics
UPPER REAR	<input type="checkbox"/> Solid back panel	<input type="checkbox"/> Clear glass rear swinging doors w/o lock <input type="checkbox"/> Mirror rear swinging doors w/o lock
EXTERIOR COLOR	<input type="checkbox"/> Gray exterior	<input type="checkbox"/> Laminated exterior (Wilsonart/Formica non-premium) <input type="checkbox"/> Laminated exterior (Wilsonart/Formica premium) <input type="checkbox"/> Black exterior
BASE	<input type="checkbox"/> Base w/package ledge	<input type="checkbox"/> Base w/storage door & ledge <input type="checkbox"/> Base w/storage door (No ledge)


PRODUCT SPECIFICATIONS

Intended Use of Display Area: Unpackaged non-refrigerated products
 Integrated Product Temperature (IPT): Ambient°F
 Intended Environment:

PLAN VIEW

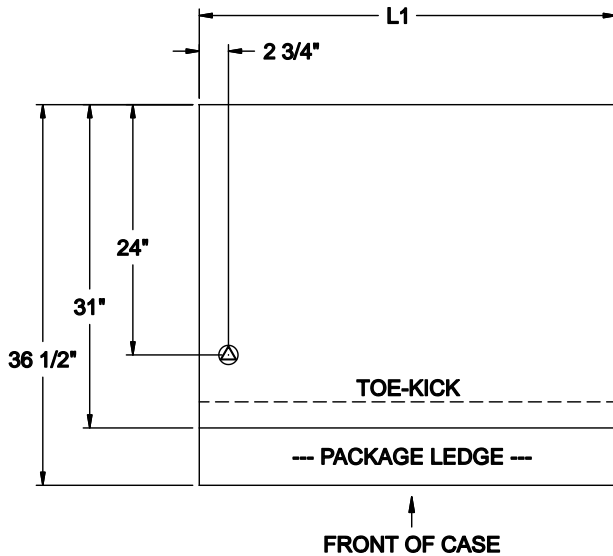

SIDE VIEW

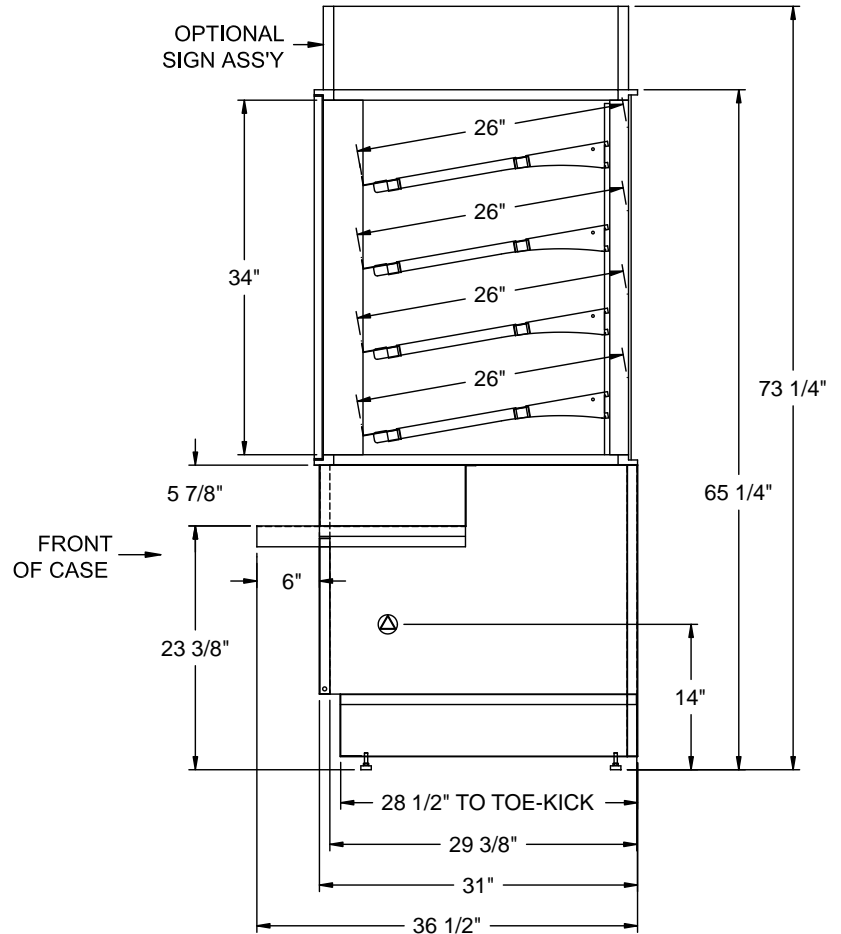

NOTE: ALL DIMENSIONS APPROXIMATE

- ⊗ ELECTRICAL JUNCTION BOX
(SUPPLIED WITH 6" LEADS OR POWER CORD)
- ⊙ LOCATION OF CONDENSATE DRAIN TUBE
(SUPPLIED WITH 3/4" OR 1 1/2" PVC DRAIN TUBE)
- ▨ PREFERRED LOCATION FOR SERVICE ENTRY
- ⊕ REFRIGERANT LINE CONNECTION

	Self-Contained Refrigeration/Dry					Remote Refrigeration w/Leads				
Model	L1*	L2*	Volts++	Amps	NEMA Plug	Volts++	Amps***	BTUH	Ship Wt	Frt Cls
CSF4231	42	N/A	120/1/60	0.49	NEMA 5-15 P	N/A	N/A	N/A	650	125

++ Operating range for 120 volt rating is 110-120 volts; operating range for 220 volt rating is 208-230 volts.

** Requires 3 wires + ground

*** Does not include electric defrost on freezer models

REGULATORY APPROVALS

- ETL Listed Conforms to UL 65
- ETL Sanitation Conforms to NSF 2