

M-1 Series

Commercial Grade

Emergency Lighting Unit

Decorative and economical unit with "EZ" install back plate feature has adjustable light heads, modern appearance and low maintenance. Ideal for use in, retail, office, education, hospitality/lodging, institutional, and multiple dwelling applications.

Technical Specifications

- > Completely Self Contained
- > Fully Automatic Operation
- > Standard with two fully adjustable glare-free lighting heads
- > Compact, low profile design in neutral finish
- > Push to test switch
- > Automatic, low voltage disconnect (LVD)
- > 120 or 277 VAC operation
- > Injection-molded, V-O flame retardant, high impact, thermoplastic housing
- > Charge rate/power on LED indicator light
- > U.L. listed for damp location
- > Universal mounting plate with "EZ" Quick Connect for rapid labor saving installation
- > 6-Volt pure lead, maintenance-free battery
- > Environmentally-coated, solid state charger

Warranty
1 Year



Ordering Information


Series	Emergency Operation	Voltage Input	Lamp Wattage	Battery Voltage
M-1 (white)	90 Minute	120 / 277V	2 x 5.4 Watt	6 Volt
M-1B (black)	90 Minute	120 / 277V	2 x 5.4 Watt	6 Volt

Whenever normal AC power fails, the internal, solid-state switch automatically connects internal battery to the lamps to keep it continuously lit for a minimum of 90 minutes. When AC is restored, the battery is disconnected from the lamps and recharging is initiated. A solid-state, two-rate charger assures that optimum charging rate will be accomplished within 12 hours.

Catalog No: _____



Project Name: _____

Fixture Type: _____

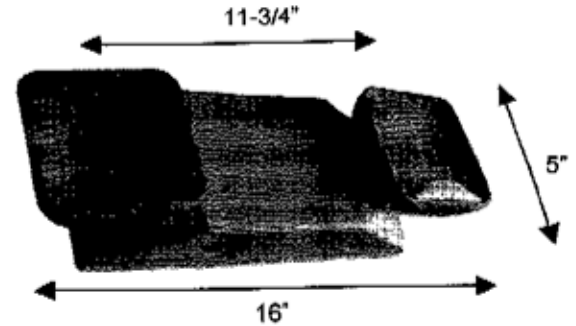

M-1 Series

Available in Black or White Finish

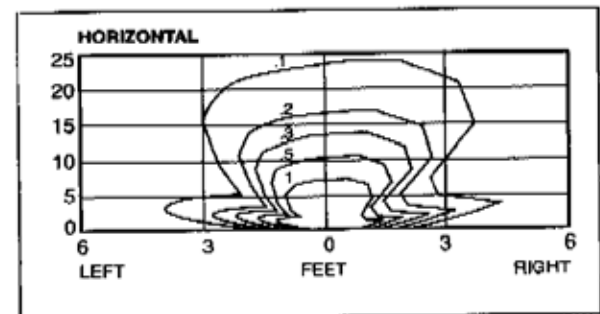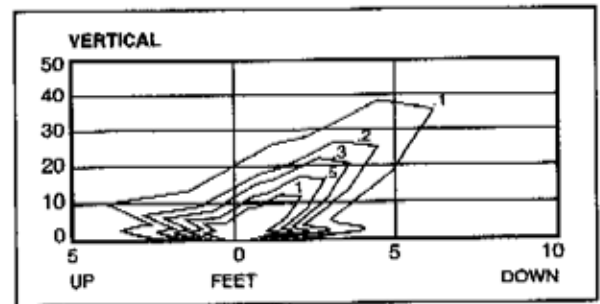

Specifications subject to change without notice.
© Copyright Magnatron 010106

MAGNATRON™

4157 Seaboard Road Orlando, FL
PHONE: (407) 578-3426 FAX: (407) 578-3714