

M-2 Series

Commercial Grade

Emergency Lighting Unit

Catalog No: _____

Project Name: _____

Fixture Type: _____

Decorative and economical unit with "EZ" install back plate feature has modern appearance and low maintenance. Ideal for use in, retail, office, education, hospitality/lodging, institutional, and multiple dwelling applications.

Technical Specifications

- Completely Self Contained
- Fully Automatic Operation
- Compact, low profile design in neutral finish
- Push to test switch
- Automatic, low voltage disconnect (LVD)
- 120 or 277 VAC operation
- Injection-molded, V-O flame retardant, high impact, thermoplastic housing
- Charge rate/power on LED indicator light
- U.L. listed for damp location
- Universal mounting plate with "EZ" Quick Connect for rapid labor saving installation
- 6-Volt pure lead, maintenance-free battery
- Environmentally-coated, solid state charger
- Available in Black or White Finish

Warranty

1 Year



Damp Location

Ordering Information

Examples: M-1 or M-1B




Series	Emergency Operation	Voltage Input	Lamp Wattage	Battery Voltage
M-2 (white)	90 Minute	120 / 277V	2 x 5.4 Watt	6 Volt
M-2B (black)	90 Minute	120 / 277V	2 x 5.4 Watt	6 Volt

Whenever normal AC power fails, the internal, solid-state switch automatically connects internal battery to the lamps to keep it continuously lit for a minimum of 90 minutes. When AC is restored, the battery is disconnected from the lamps and recharging is initiated. A solid-state, two-rate charger assures that optimum charging rate will be accomplished within 12 hours.



M-2B

Shown as M-2B Black and also available in M-2 White Finish

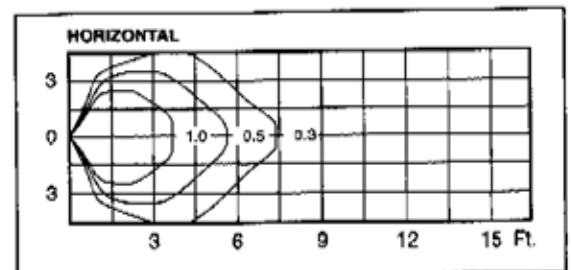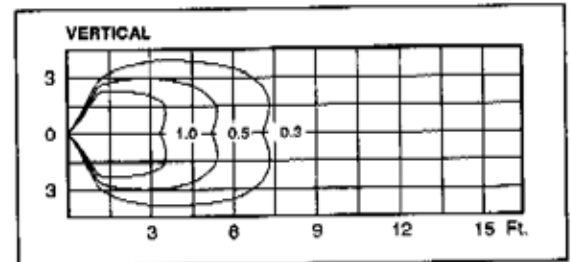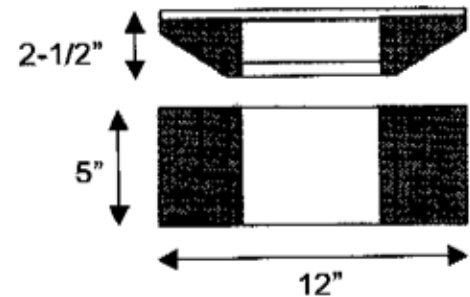

MAGNATRON™

4157 Seaboard Road Orlando, FL
 PHONE: (407) 578-3426 FAX: (407) 578-3714

Specifications subject to change without notice.
 © Copyright Magnatron 010106