



Item # \_\_\_\_\_

Job \_\_\_\_\_

## METRO® MOBILE END LOAD “KNOCK DOWN” RACKS

- **Material:** Special design, natural finish, high-strength, extruded aluminum (6063-T6 alloy).
- **Rugged:** Tubular framework with aircraft-riveted slide assemblies.
- **Economical:** Shipped “knocked down” for reduced freight rate. Easily assembled with 12 bolts.
- **Sanitary:** Removable slide assemblies for easy cleaning.
- **Versatile:** Slide assemblies can be replaced with slides of other than standard spacing while retaining the same framework.
- **Pass-Thru Design:** Can be loaded on one side and unloaded from the other for maximum efficiency and convenience.
- **Stable:** 5" (127mm) diameter, NSF-listed casters, corner-mounted for maximum stability.
- **Lightweight:** Easy to handle.
- **Rapid Cooling**

**NOTE:** Available factory set-up. See price list.



RT183N

NSF



**InterMetro Industries Corporation**  
North Washington Street  
Wilkes-Barre, PA 18705  
[www.metro.com](http://www.metro.com)



**End-Load “Knock-Down Racks”**

**13.70**



Job \_\_\_\_\_



## END LOAD "KNOCK DOWN" RACKS

### Specifications

- **Material:** Special design, natural finish, high strength, extruded aluminum (6063-T6 alloy).
- **Construction:** Pass-thru design, aircraft-riveted construction on slide assemblies, tensilok fasteners for frame assembly.
- **End Frames:** 1" square x .093" (25x2.4mm) wall extruded aluminum tubing.
- **Tie Bars:** Left to right and front to back tie bars of 1" (25mm) diameter aluminum bar stock, drilled and tapped at each end.
- **Slides, 3" & 5" (75 & 127mm) Spacing:** .060"x1 1/4"x1 1/2" (1.5x32x38mm) profile, bulb-tipped extruded angle-riveted to .060"x1"x1" (1.5x25x25mm) angle uprights.
- **Slides, 1 1/2" (38mm) Spacing:** .060"x1 1/2"x1 1/2" (1.5x12.7x38mm) bulb-tipped, extruded channel-riveted to .060"x1"x1" (1.5x25x25mm) angle uprights.
- **Casters:** Two HS5M on back — 5" (127mm) diameter ball bearing swivel stem casters with self-lubricating axle. Two HS5MB on front — same as above with wheel brake. NSF listed.
- **Load Rating:** 20 lbs. (9kg) per level. Not to exceed 300 lbs. (159kg) per unit.

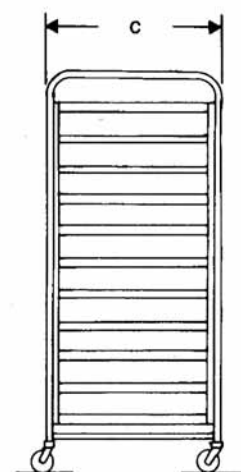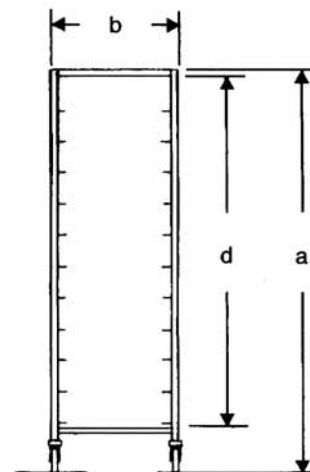

### Dimensions

| Cat. No. | (a)<br>Height<br>(in.) | (b)<br>Width<br>(mm) | (c)<br>Depth<br>(mm) | (d)<br>Inside Height<br>(in.) | (d)<br>Height<br>(mm) | Slide<br>Spacing<br>(in.) | Slide<br>Spacing<br>(mm) | Pan Capacity<br>No. | Pan Capacity<br>Size (in.) | Shipping<br>Weight<br>(lbs.) | Shipping<br>Weight<br>(kg) |
|----------|------------------------|----------------------|----------------------|-------------------------------|-----------------------|---------------------------|--------------------------|---------------------|----------------------------|------------------------------|----------------------------|
| RT183N   | 64 1/8                 | 20 3/8               | 28                   | 55 7/8                        | 1420                  | 3                         | 76<br>or 36              | 18                  | 18x26                      | 53                           | 24                         |
| RT115N   | 64 1/8                 | 20 3/8               | 28                   | 55 7/8                        | 1420                  | 5                         | 127<br>or 22             | 11                  | 18x26                      | 50                           | 23                         |
| RT1334N  | 64 1/8                 | 20 3/8               | 28                   | 55 7/8                        | 1420                  | 1 1/2                     | 38                       | 34                  | 18x26                      | 55                           | 25                         |

### Accessories

| Model No. | Description                |
|-----------|----------------------------|
| SU        | Factory Set-Up             |
| A38       | Gray Rubber Corner Bumpers |

All Metro Catalog Sheets are available on our Web Site: [www.metro.com](http://www.metro.com)



**InterMetro Industries Corporation**  
 North Washington Street, Wilkes-Barre, PA 18705  
 Phone: 570-825-2741  
 Fax: 570-825-2852

L02-081  
 Printed in U.S.A. Rev. 6/10  
 Information and specifications are subject to change without notice. Please confirm at time of order.  
 Copyright © 2010 InterMetro Industries Corp.

For Product Information: U.S. and Canada: 1.800.992.1776 Latin America: 1.561.333.3824 Asia/Pacific: +65.6567.8003 Middle East/Africa: +971.4.811.8286 Europe: +31.76.587.7550