

Boomerang Barstool


ASSEMBLY INSTRUCTIONS



LANCASTER™
TABLE & SEATING

PARTS LIST:

A Frame 1/PC

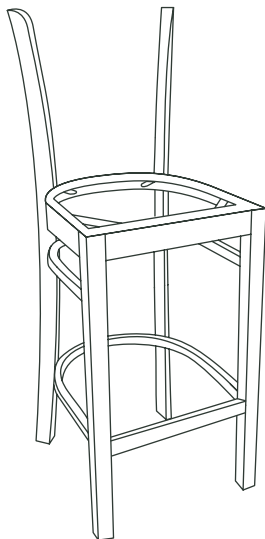

B Wood Seat 1/PC





Vinyl Seat 1/PC



OR

C Backrest 1/PC



D Backrest Screws (long screws) 4/PC



E Seat Screws (short screws) 4/PC

REQUIRED TOOLS:


• Screwdriver

NOTES:

1. Inspect all pieces for damage before assembly. Do not assemble if any pieces are broken or damaged. Ensure you have all required pieces before assembly.
2. Power drill is optional for assembly.
3. There are two options for Step 1, please reference both steps for your preference.


STEP 1

Option 1: Place barstool frame (A) on its back. Center seat (B) on the frame with four screw holes, push cushion against frame, ensuring front of seat is parallel with the front of the frame.

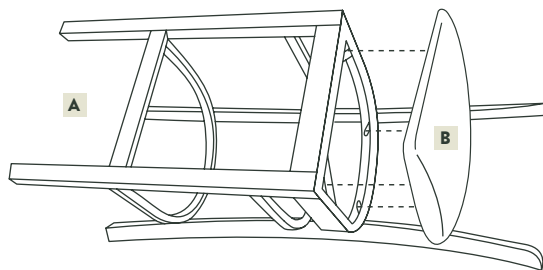

OR

Option 2: Place seat (B) upside down on flat surface, preferably a table. Center seat (B) on the frame, aligning the four screw holes. Push the seat against frame, ensuring the front of seat is parallel to the front of the frame.

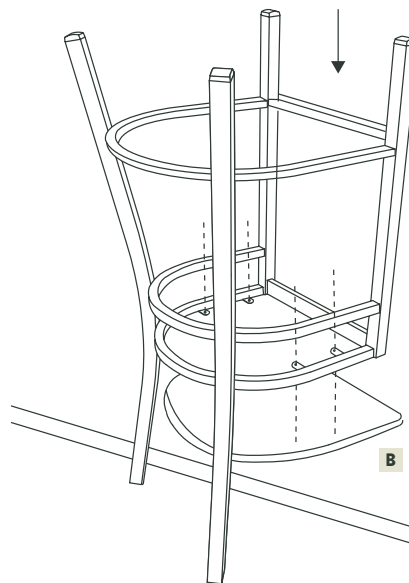

Boomerang Barstool


ASSEMBLY INSTRUCTIONS



LANCASTER™
TABLE & SEATING

STEP 2

Attach seat (B) to frame (A) with four seat screws (E) using a screwdriver or power drill. Ensure all screws are tightened fully. Stand chair upright.

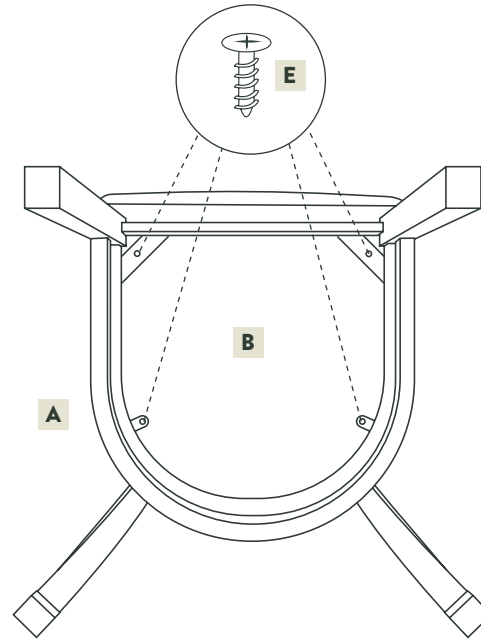

STEP 3

Attach backrest (C) to frame (A) with the four backrest screws (D) by aligning the top bolt catch holes on the backrest with the top holes on the frame and using a screwdriver or power drill to tighten fully.

