


MATERIALS INCLUDED

- A** (2) Side Frame
- B** (1) Upper Shelf
- C** (1) Lower Shelf
- D** (1) Handle
- E** (2) Caster with Brake
- F** (2) Caster
- G** (4) Black Plastic Cap
- H** (12) 5/16-18 x 1.625" Screw
- I** (12) 5/16-18 Hexagon Nylon Lock Nut

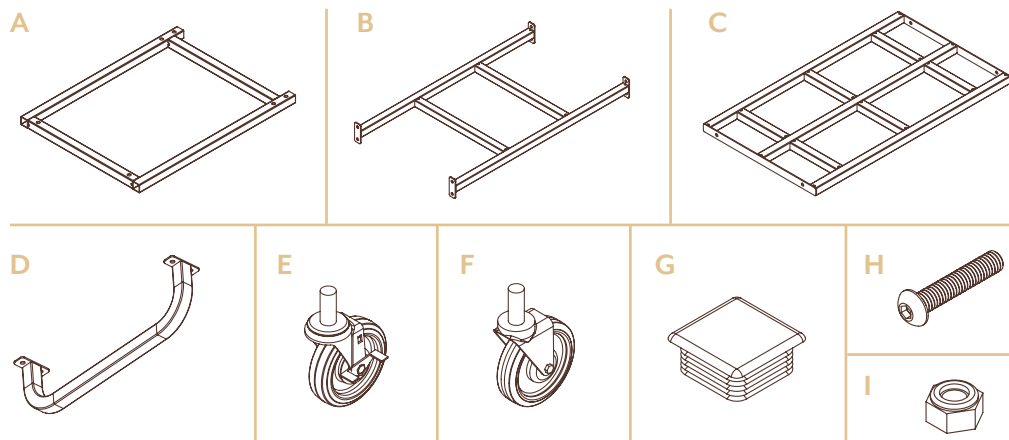

INSTRUCTIONS

1. Fit the black plastic caps to the side frame.
2. Assemble the side frames to the lower shelf.
3. Assemble the handle to the upper shelf.
4. Tighten the nut on the rod of the caster. Test for a snug fit by inserting into tube on bottom of cart. If not snug, continue tightening the nut until it fits snugly.
5. When all casters fit snugly, tighten the nut on the bottom of each caster in a clockwise direction.
6. Install all 4 casters to the bottom of the cart.

