



INSTRUCTIONS - LOCK INSTALLATION

ILP-1512

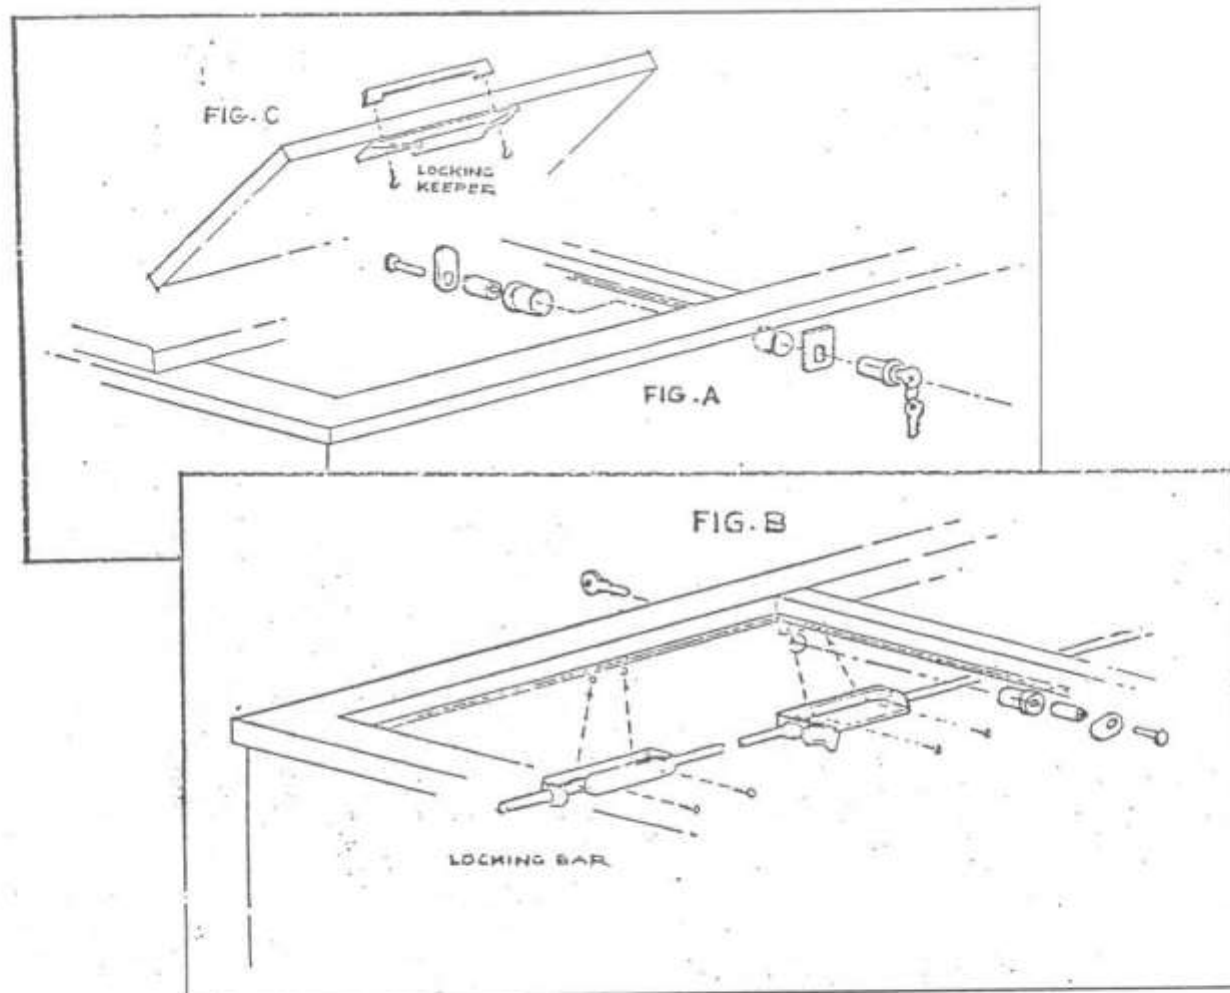

TO PROPERLY INSTALL THIS PACKAGE, IT IS RECOMMENDED THE FOLLOWING STEPS BE USED:

1. Remove plug button from Exterior and Interior of cabinet.
2. Using a screwdriver or knife, completely remove insulation within hole.
3. Place lock cylinder thru cabinet as illustrated in Fig. A.
4. On DW/SF 94, 64, and 49 models, remove screws retaining center lid divider (see Fig. B).
5. Attach locking bar mechanism (as illustrated) to interior wall using screws provided in pkg.
6. Attach locking keeper to bottom of lids as illustrated in Fig. C.

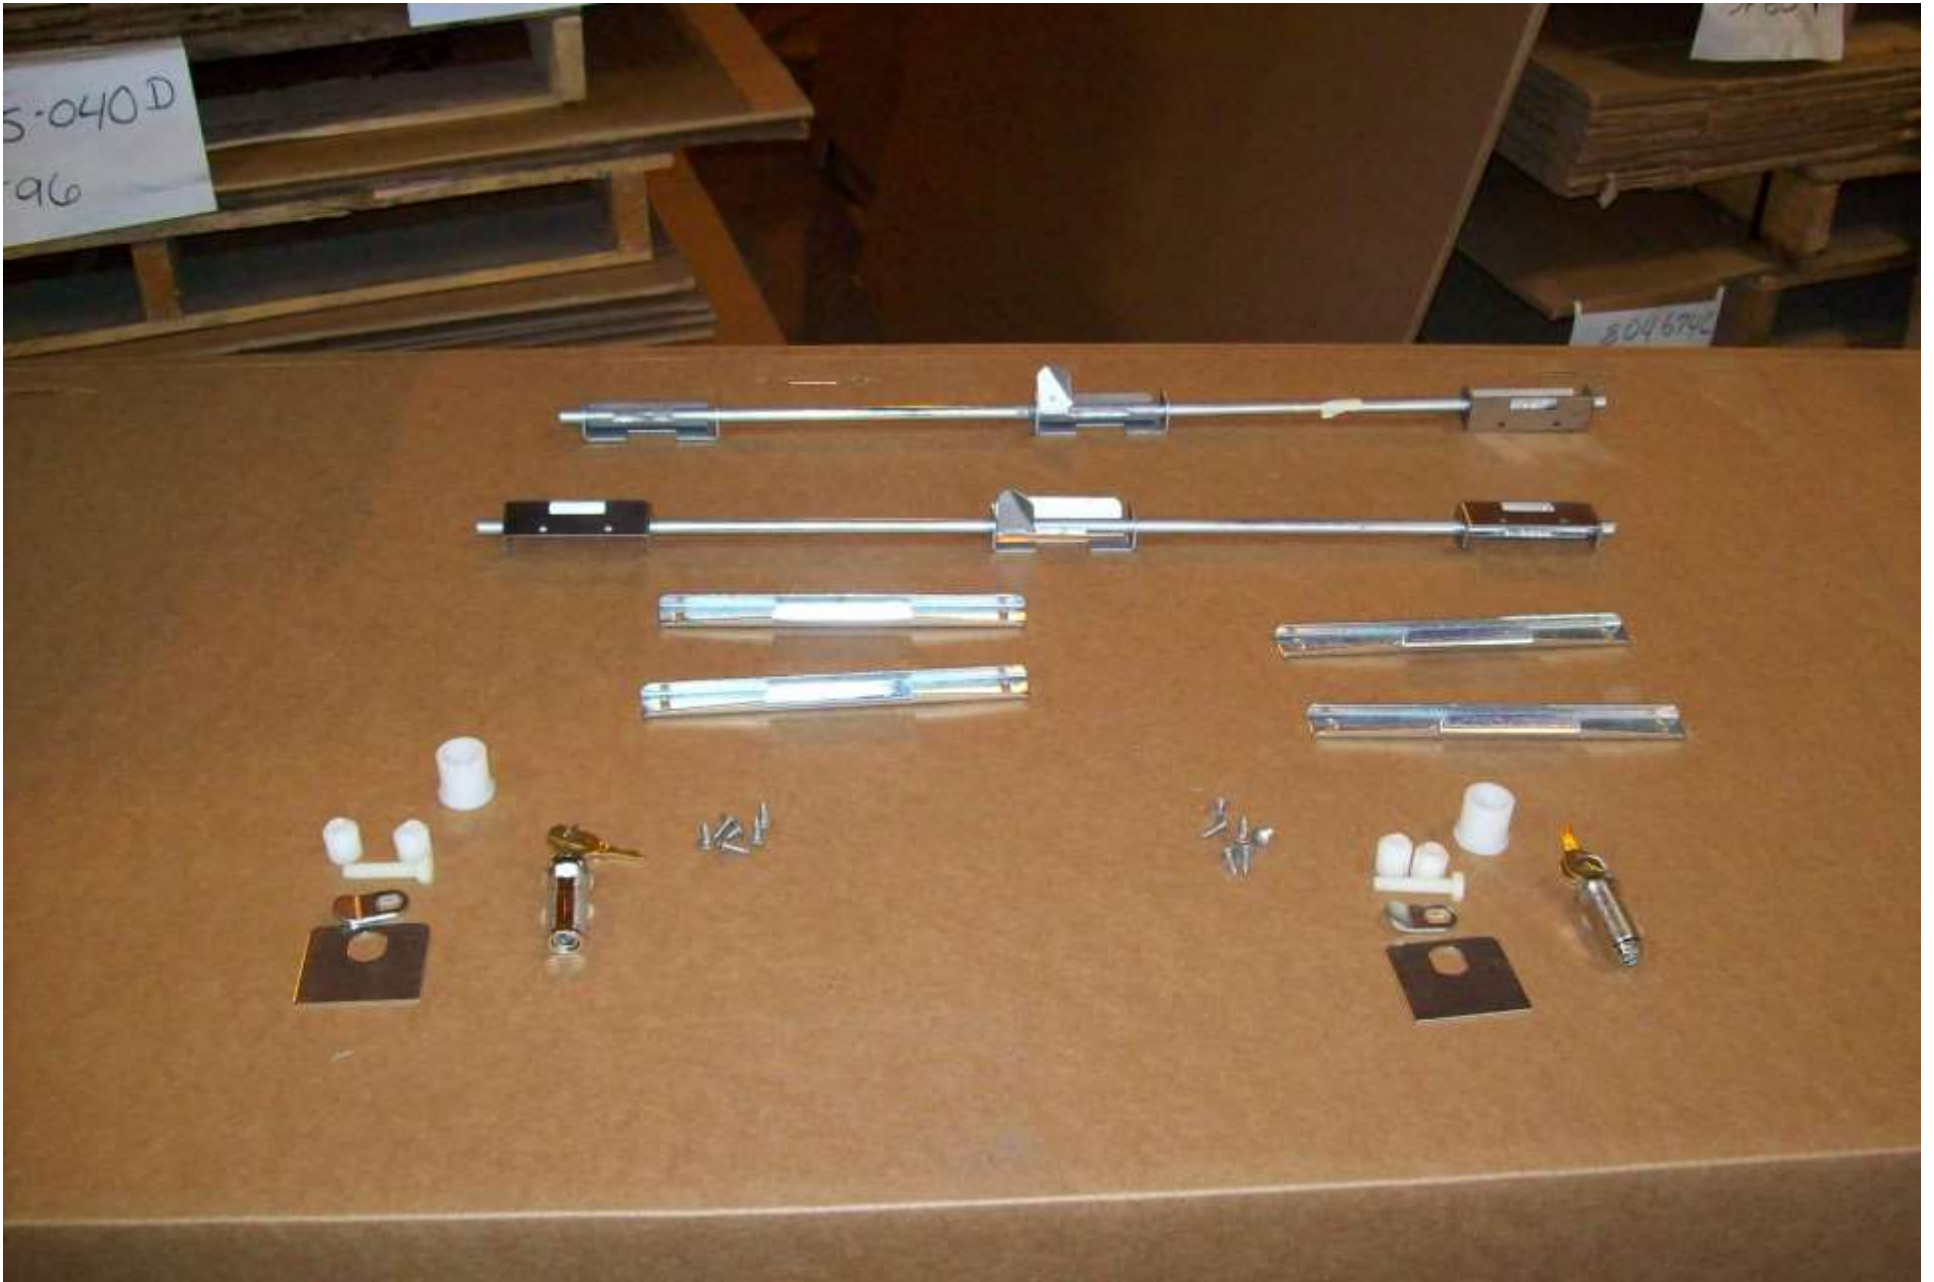

LOCKING KIT PARTS



INSTALLED – UNLOCKED POSITION



INSTALLED – LOCKED POSITION