




Your Solutions Partner

Installation and Operation Manual

Front Counter

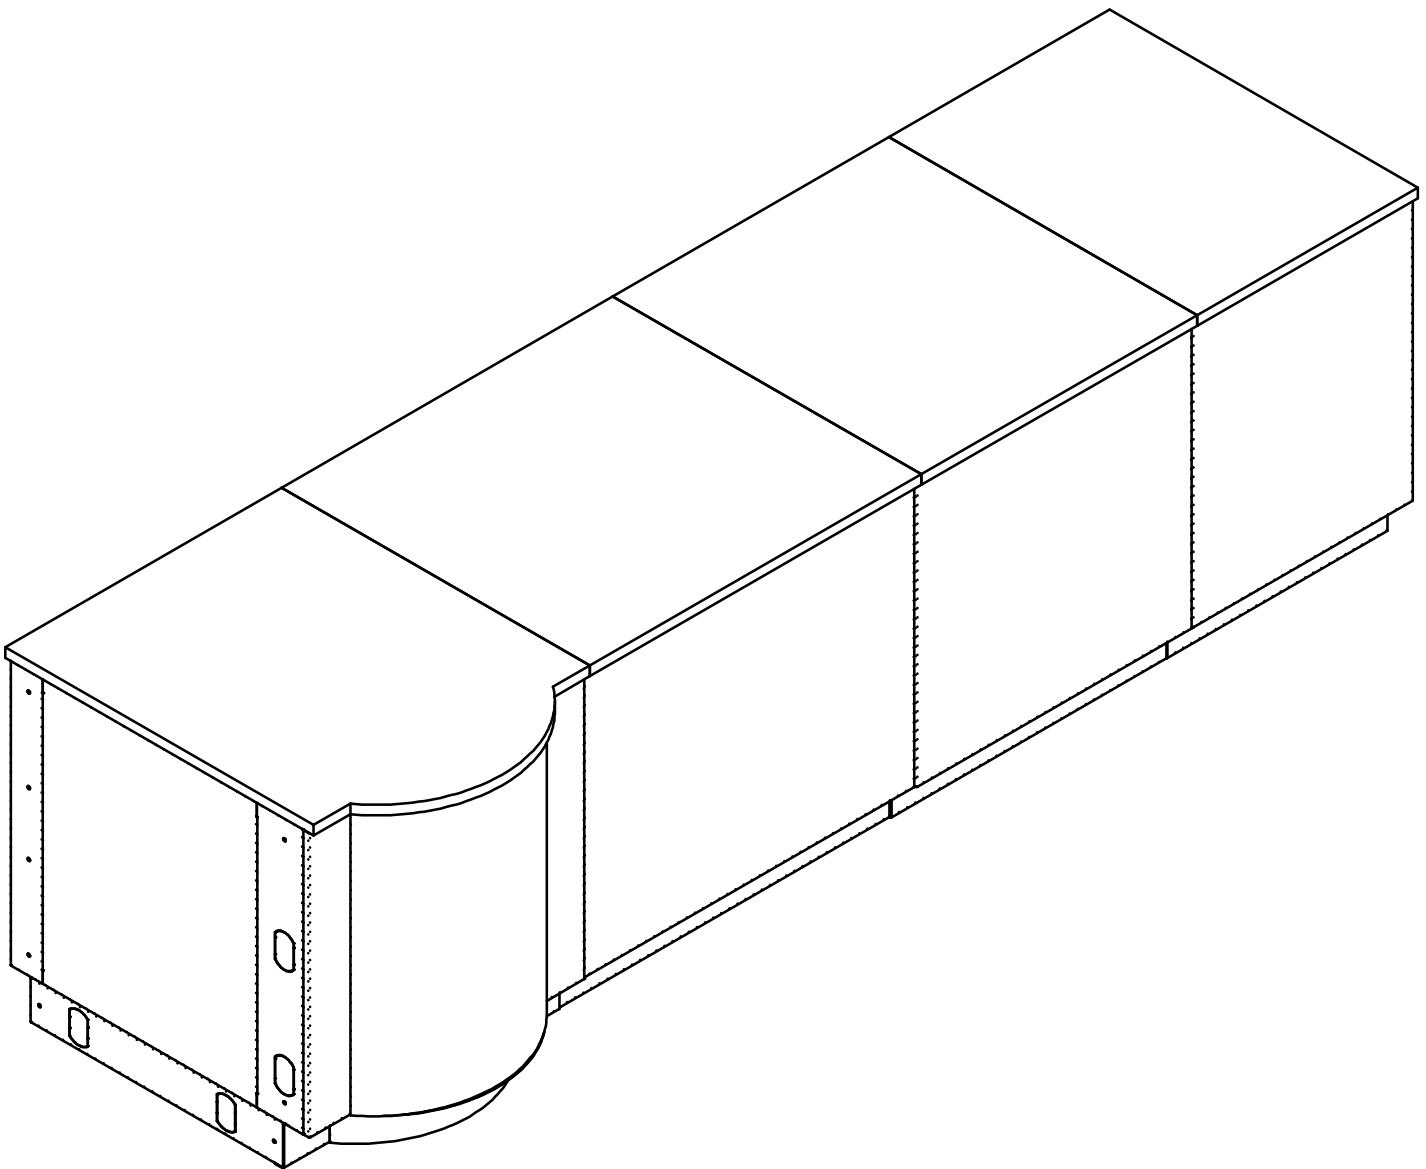

CAUTION: Please read this manual completely before attempting to install, operate or service this equipment



WARNING for CA residents: go to www.dukemfg.com/prop65 for prop 65 warning

*This manual is Copyright © 2021 Duke Manufacturing Co. All rights reserved.
Reproduction without written permission is prohibited. Duke is a registered
trademark of the Duke Manufacturing Co.*

**P/N 229386
REV C 07/12/2021**

IMPORTANT SAFETY INSTRUCTIONS

Throughout this manual, you will find the following safety words and symbols that signify important safety risks with regards to operating or maintaining the equipment.



Indicates a hazardous situation which, if not avoided, could result in death or serious injury.



Indicates a hazardous situation which, if not avoided, could result in minor or moderate injury.



Indicates Important Information



Indicates electrical shock hazard which, if not avoided, could result in death or serious injury and/or equipment damage.



Indicates hot surface which, if not avoided, could result in minor or moderate injury.

IN ADDITION TO THE WARNINGS AND CAUTIONS IN THIS MANUAL, USE THE FOLLOWING GUIDELINES FOR SAFE OPERATION OF THE UNIT.

- Read all instructions before using equipment.
- For your safety, the equipment is furnished with a properly grounded cord connector. Do not attempt to remove or disconnect the grounded connector.
- Install or locate the equipment only for its intended use as described in this manual.
- Do not use corrosive chemicals on this equipment.
- Do not operate this equipment if it has a damaged cord or plug, if it is not working properly, or if it has been damaged or dropped.
- This equipment should be serviced by qualified personnel only. Contact the nearest Duke authorized service facility for adjustment or repair.
- Do not block or cover any openings on the unit.
- Do not immerse cord or plug in water.
- Keep cord away from heated surfaces.
- Do not allow cord to hang over edge of table or counter.
- Turn the unit off, disconnect the power source and allow unit to cool down before performing any service or maintenance on the unit.
- The procedures in this manual may include the use of chemical products. You must read the Material Safety Data Sheets before using any of these products.

- The unit should be grounded according to local electrical codes to prevent the possibility of electrical shock. It requires a grounded receptacle with dedicated electrical lines, protected by fuses or circuit breaker of the proper rating, in accordance with all applicable regulations.
- Disposal of the unit must be in accordance with local environmental codes and/or any other applicable codes.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

UNPACKING UNIT

Inspect the shipping carton and/or container, carefully noting any exterior damage on the delivery receipt; also note any damage not evident on the outside of the shipping container (concealed damage). Contact the carrier immediately and file a damage claim with them. Save all packing materials when filing a claim. Freight damage claims are the responsibility of the purchaser and are not covered by the warranty.





- Follow the instructions on the Carton Box for unpacking the unit.
- Inspect unit for damage.
- Report any dents or breakage to source of purchase immediately.
- Do not attempt to use unit if damaged.
- Remove all materials from unit interior.
- If unit has been stored in extremely cold area, wait a few hours before connecting power.

SPECIFICATIONS




16 Amp maximum load across all connected units.

Volts:120
Watts:1920
Amps:16
Examples below

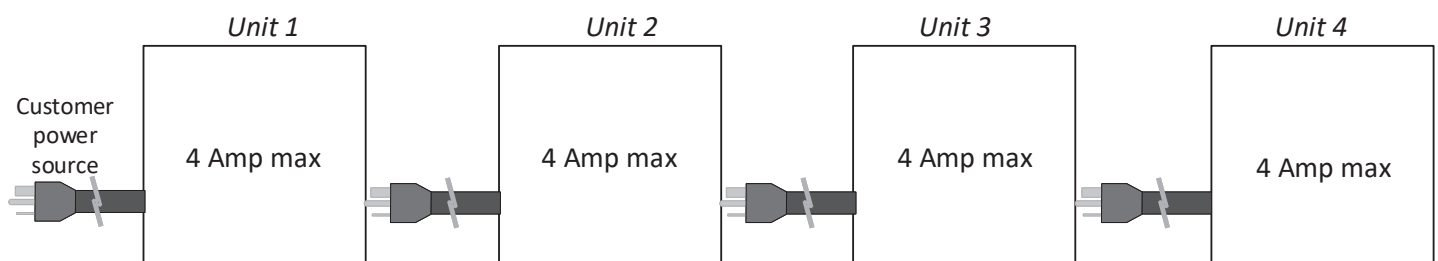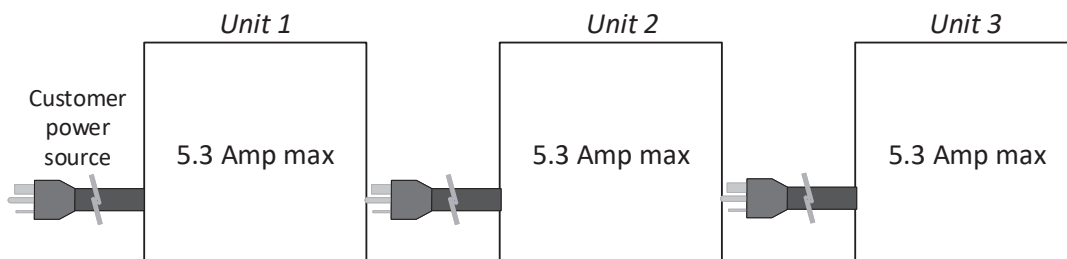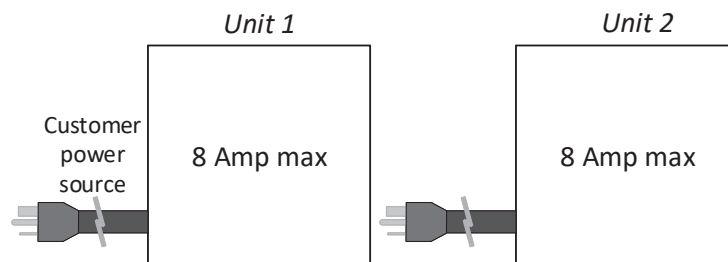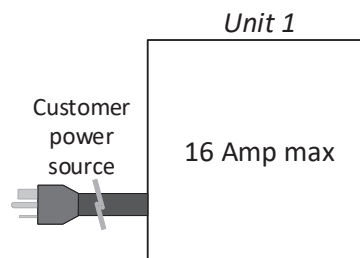

SPECIFICATIONS



POS Counter

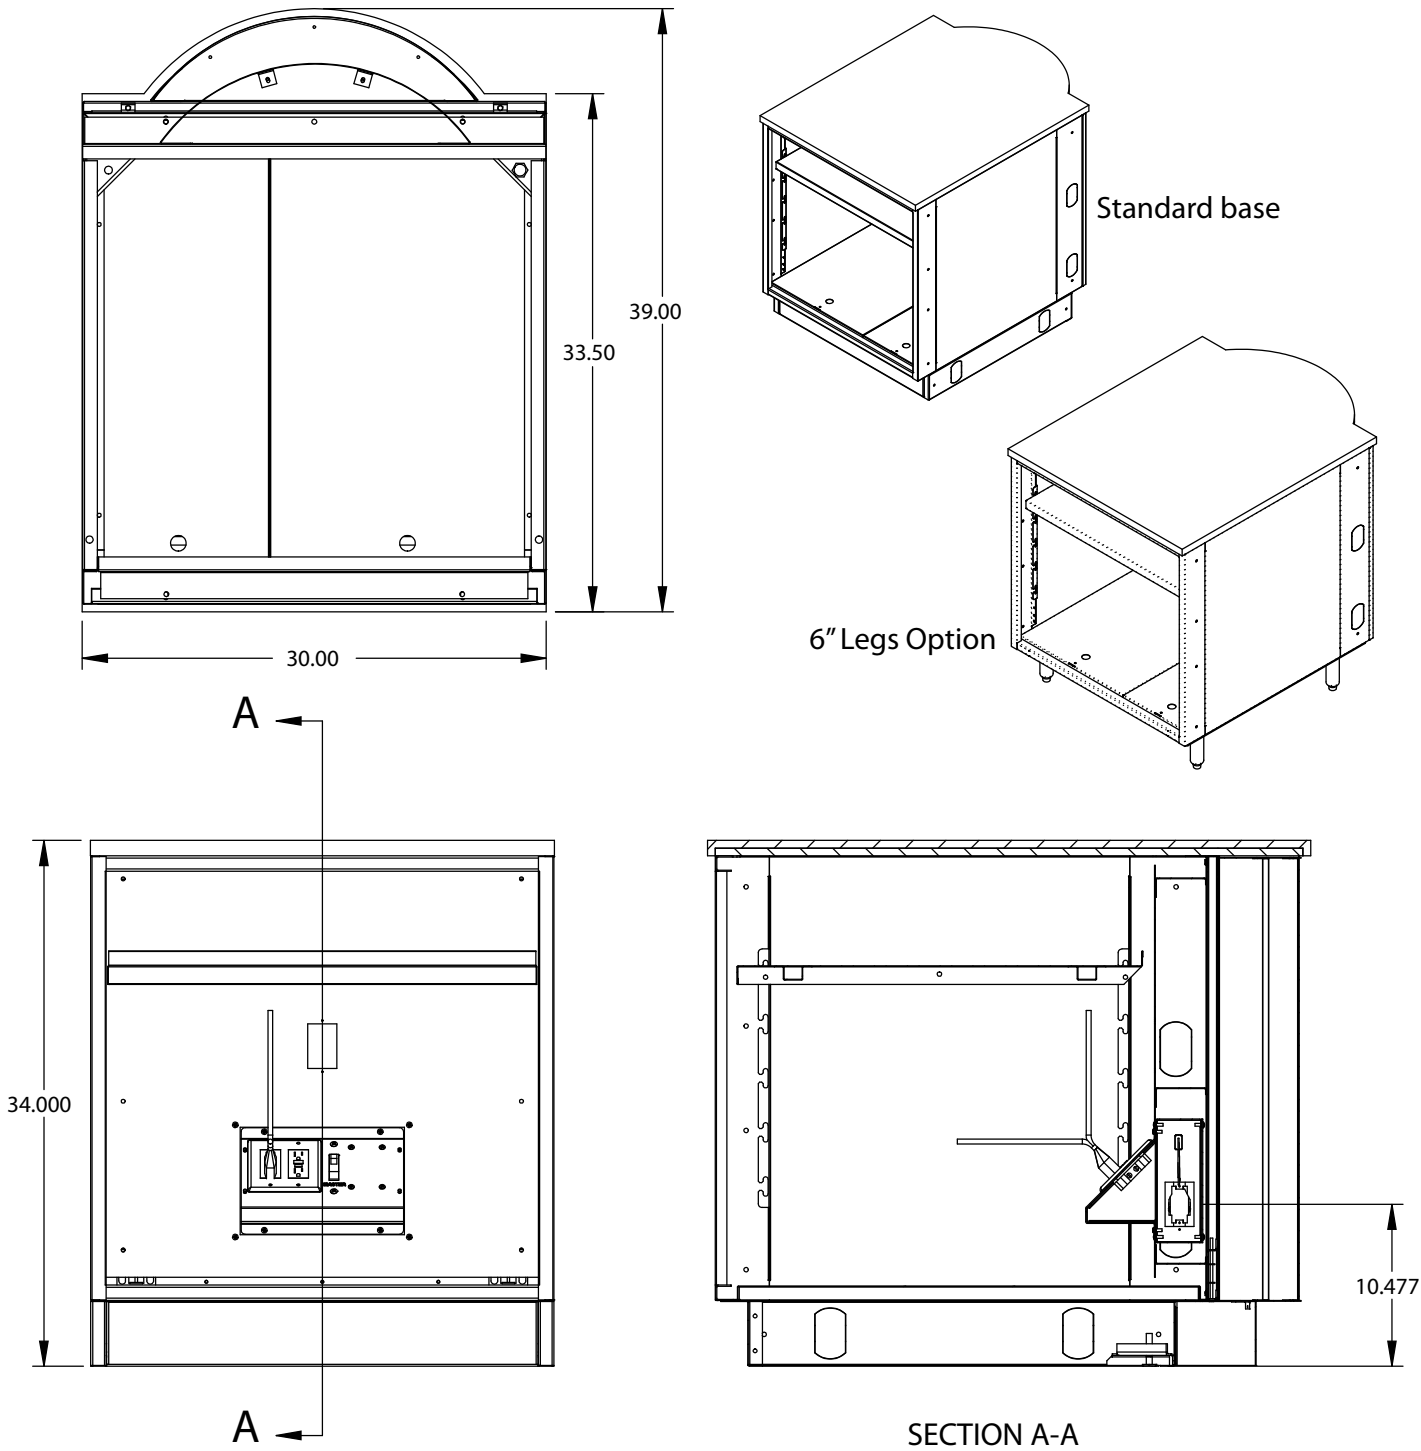


Unit	Width	Height	Depth
POS Counter	30.00	34.00	39.00

SPECIFICATIONS



Sales Units - Convertible

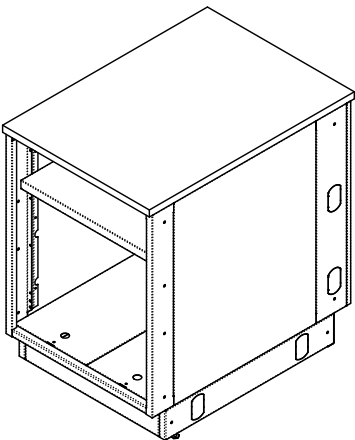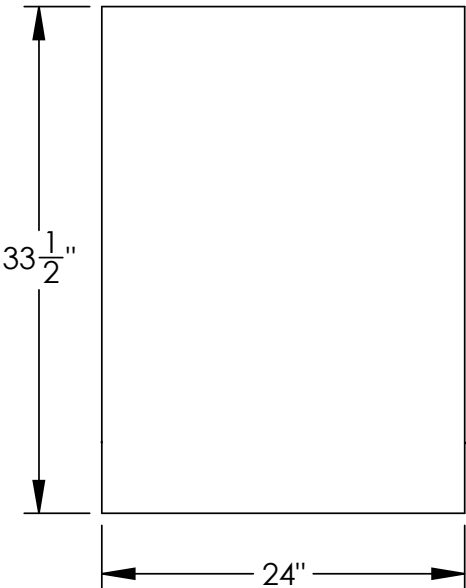

Standard Base

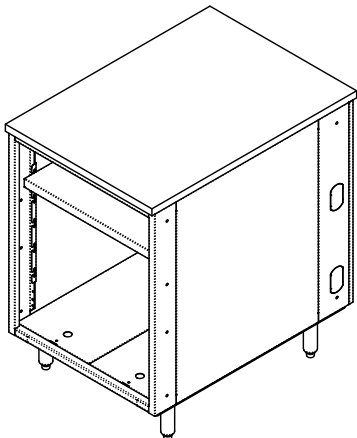

6" Leg Option



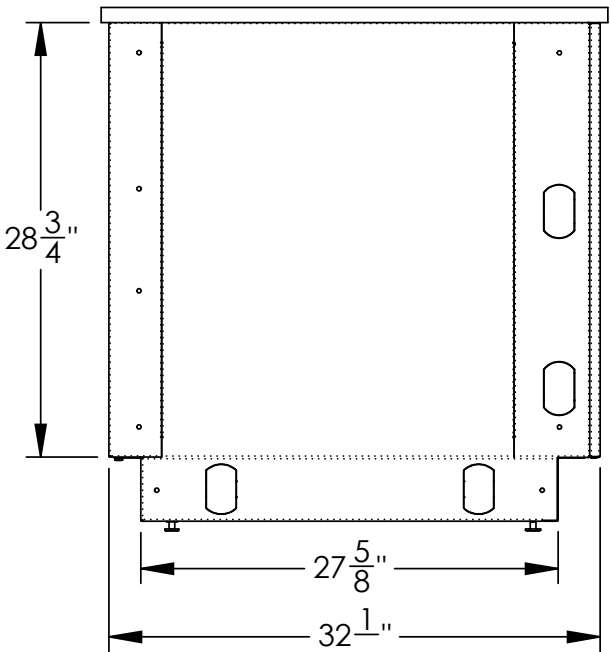
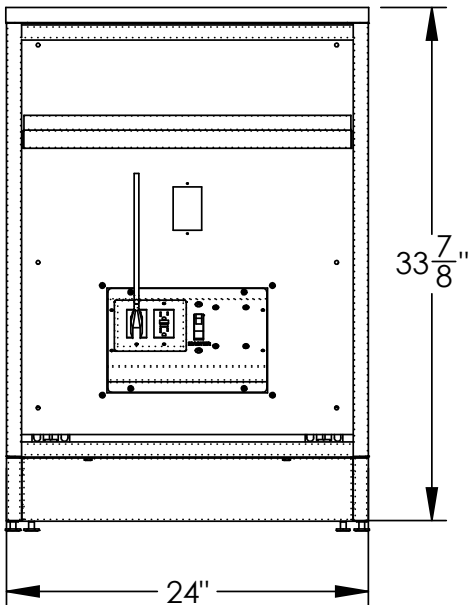


24" Sales Unit Shown

Unit	Width	Height	Depth
18" Sales	18.00	34.00	33.50
24" Sales	24.00	34.00	33.50
30" Sales	30.00	34.00	33.50
36" Sales	36.00	34.00	33.50
48" Sales	48.00	34.00	33.50

SPECIFICATIONS

48" Unit

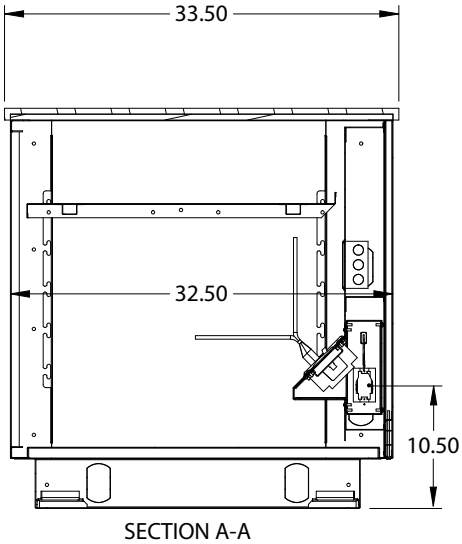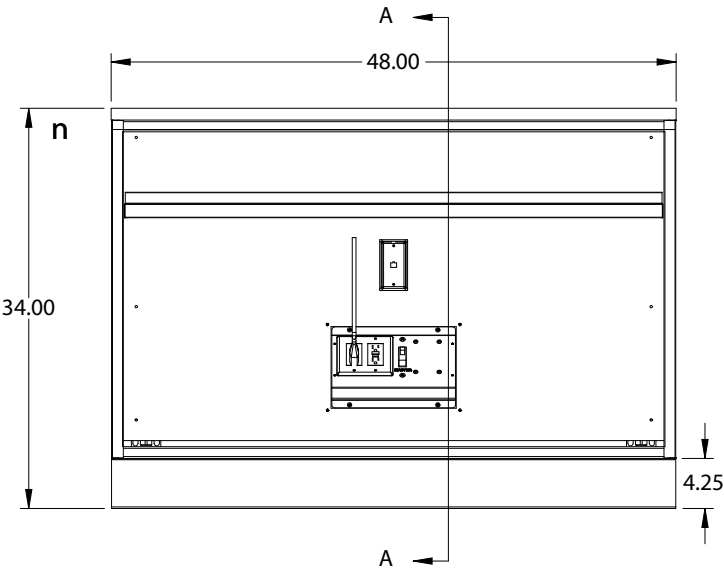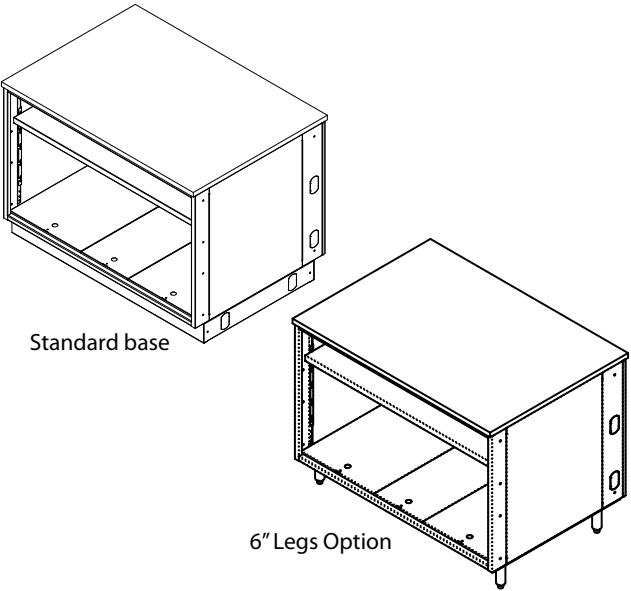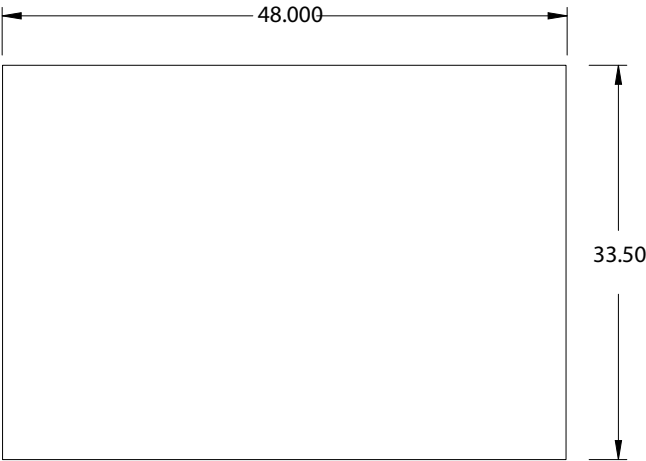


Unit	Width	Height	Depth
48" Sales	48.00	34.00	33.50

Note: This unit is not convertible




SPECIFICATIONS

Filler Wedge

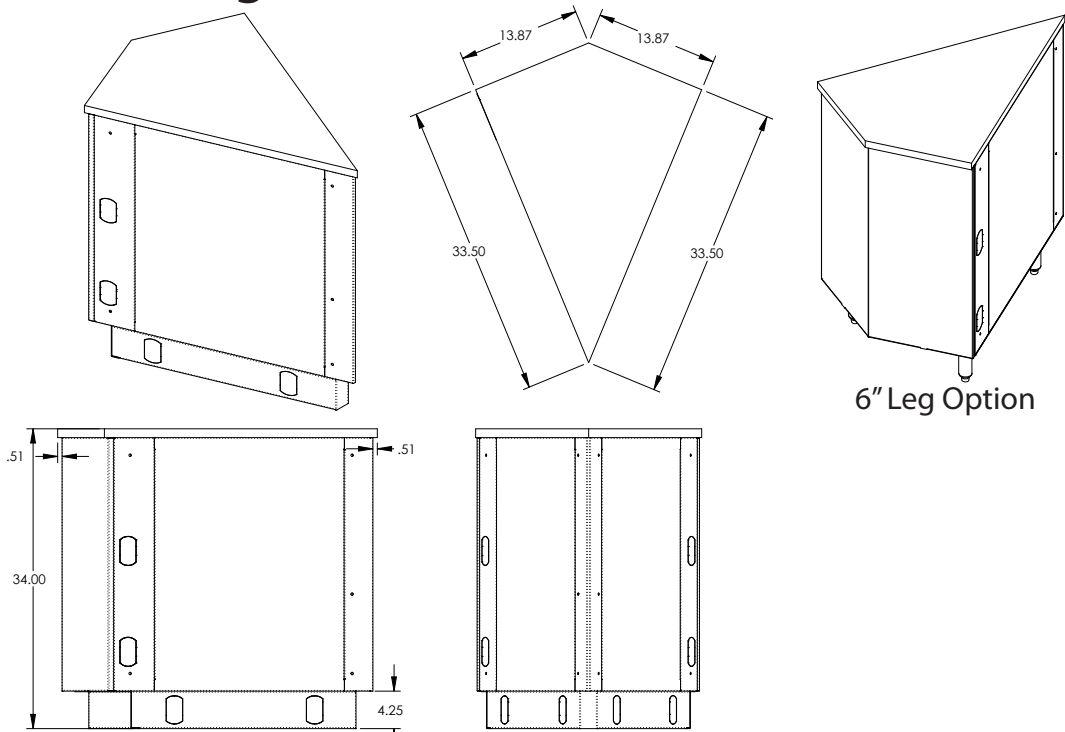


Unit	Width	Height	Depth
Filler Wedge	13.87x13.87	34.00	33.50

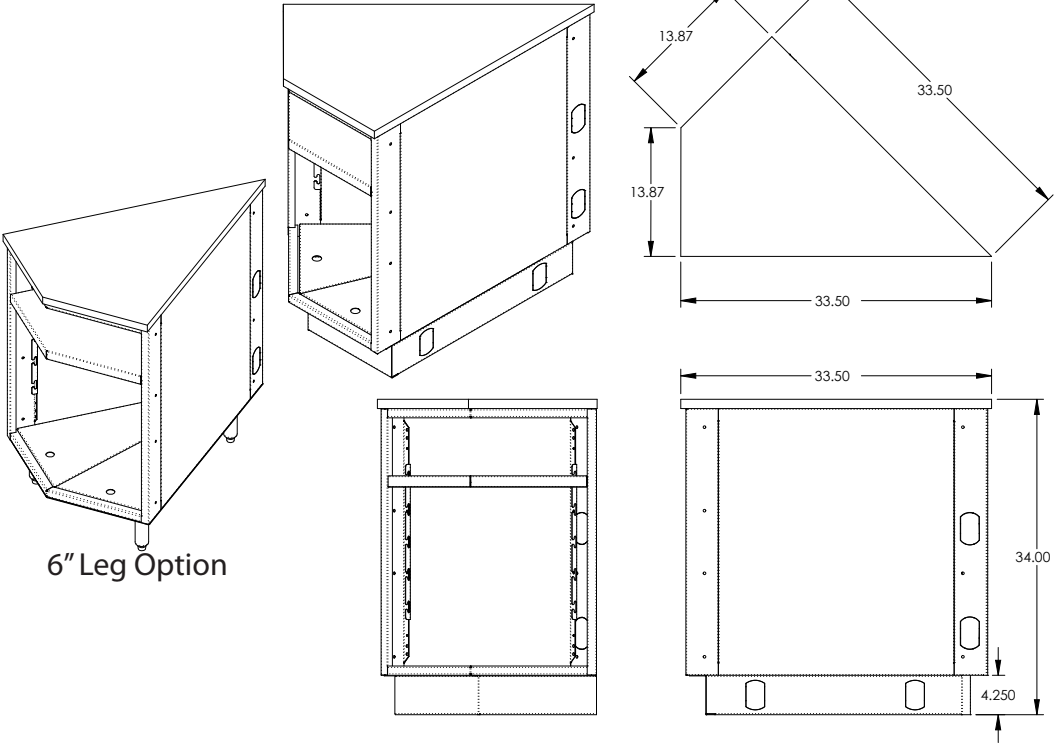



Unit	Width	Height	Depth
Rev Filler Wedge	13.87x13.87	34.00	33.50

INSTALLATION


- 1** Line up units in order to be installed.

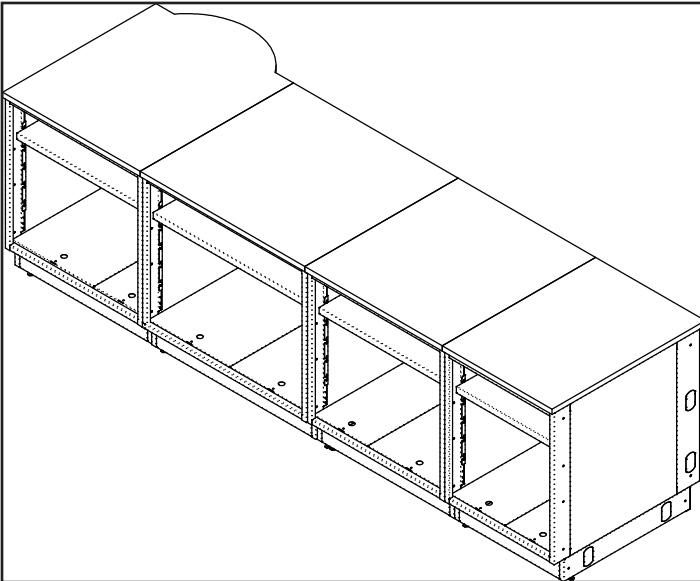

- 2** Using a 3/8" Socket and ratchet loosen the bolts located under the front panel and lower about 3/8". Lift panel up and out to remove.

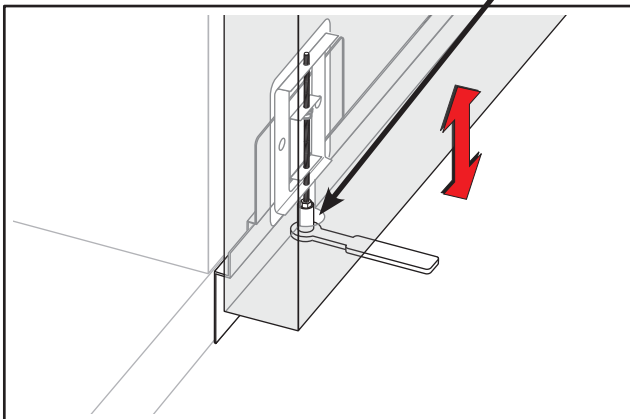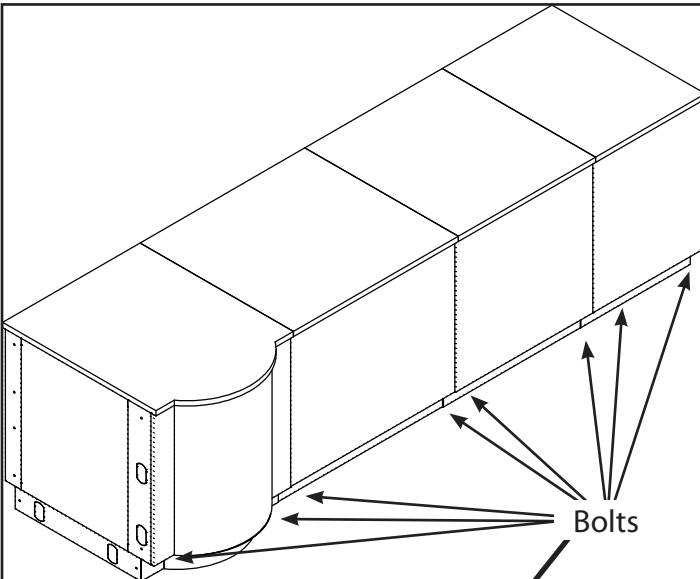


- 3** Remove data and power cord knockouts on adjoining units to connect data and electrical. Remove the bolt up knockouts in each corner in order to connect units together.

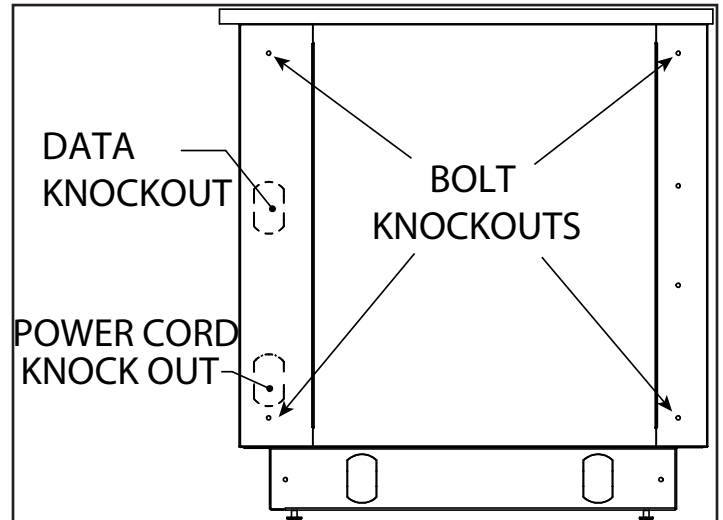

- 4** After data and electrical connections have been made, bolt units together using hardware provided. (213042/213023 Qty 4 ea.)



NOTE: DO NOT TIGHTEN AT THIS TIME

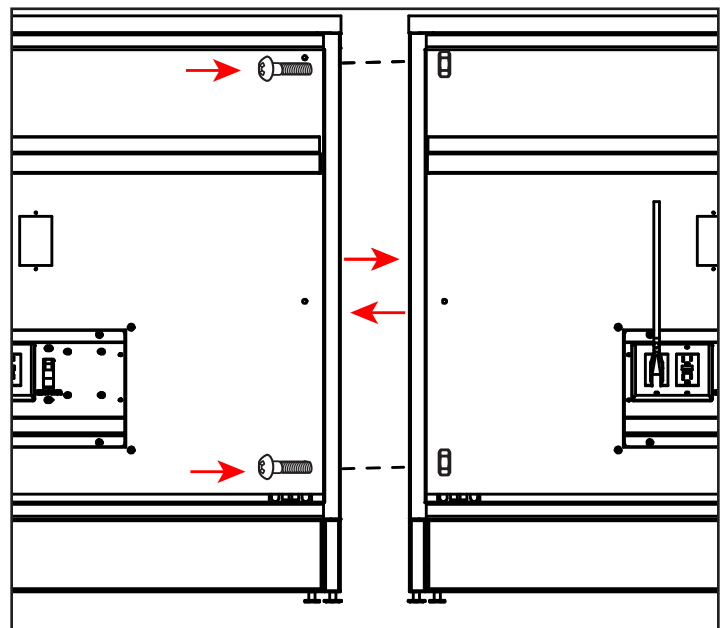



INSTALLATION

- 5** After units have been loosely bolted together level all units by turning the leveling feet.


CAUTION

Failure to complete this step could cause front panels not to install properly.

Standard Base

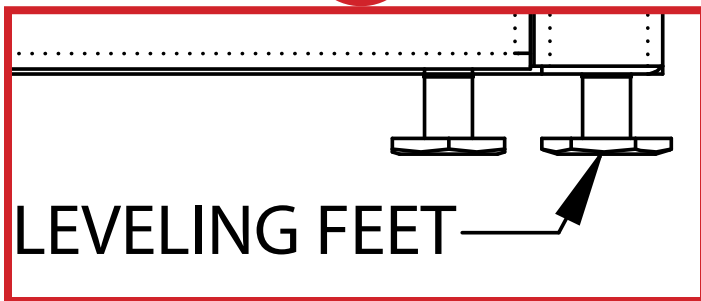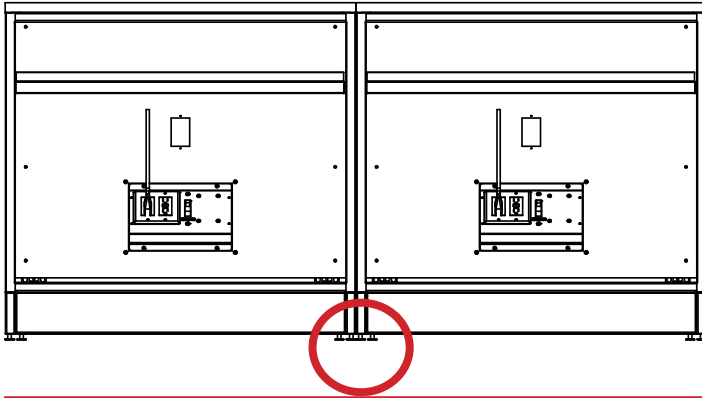

6" Leg Option


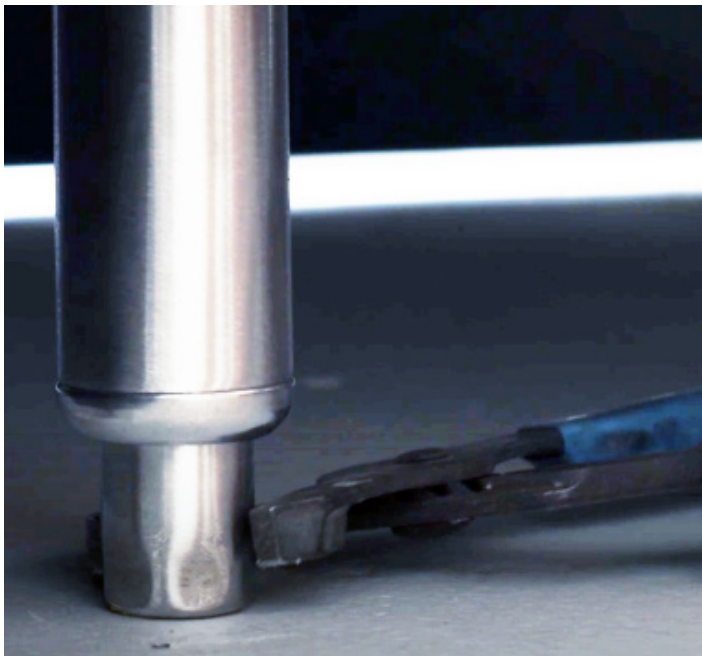


- 6** Tighten all bolts connecting all counters.

- 7** Re-install front panels.
- Slide top of panel so the top clip engages with counter.
 - Push bottom in so that the adjustable bracket is sitting on the kick plate.
 - Make sure bottom of panel is in place by slightly pulling forward on the bottom of the panel.



WARNING

Failure to make sure panel is in place could cause bodily injury.

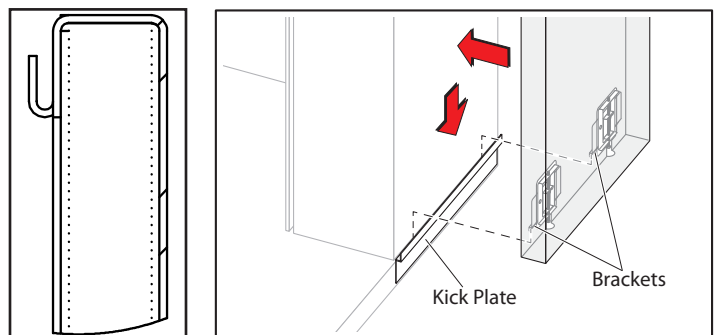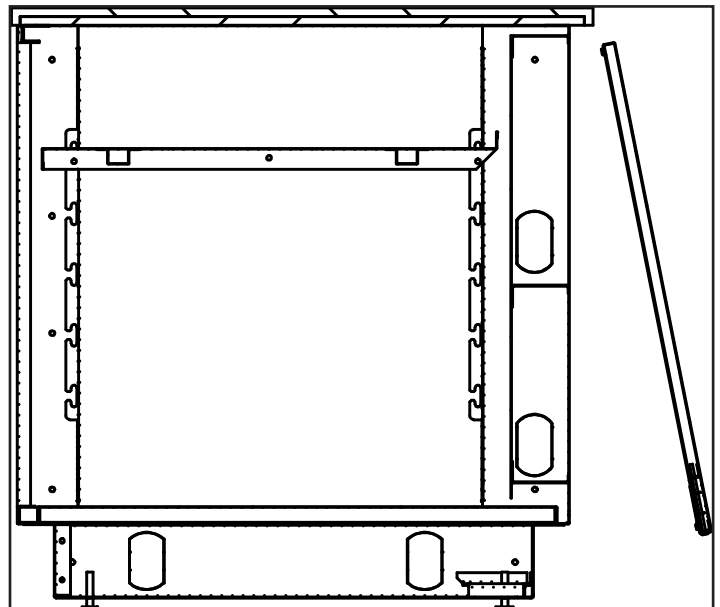


INSTALLATION


- 8** Using a 3/8" socket and ratchet, tighten adjustable bolts at the bottom of panel.

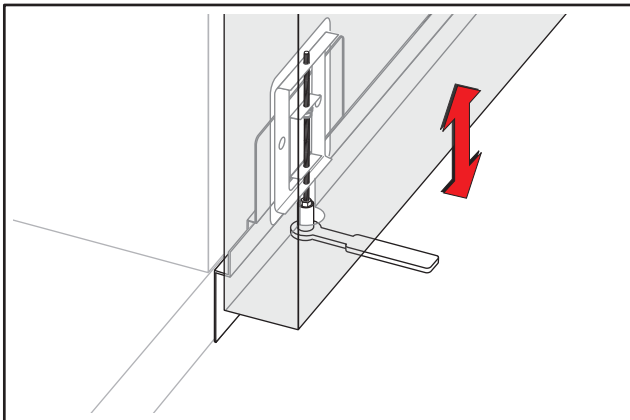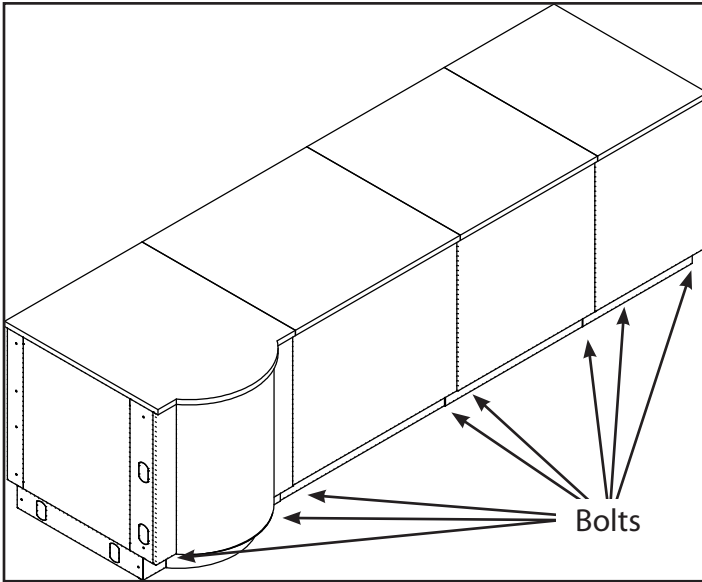

- 9** To install adjustable intermediate shelf, align hole pins on height selected on both sides.

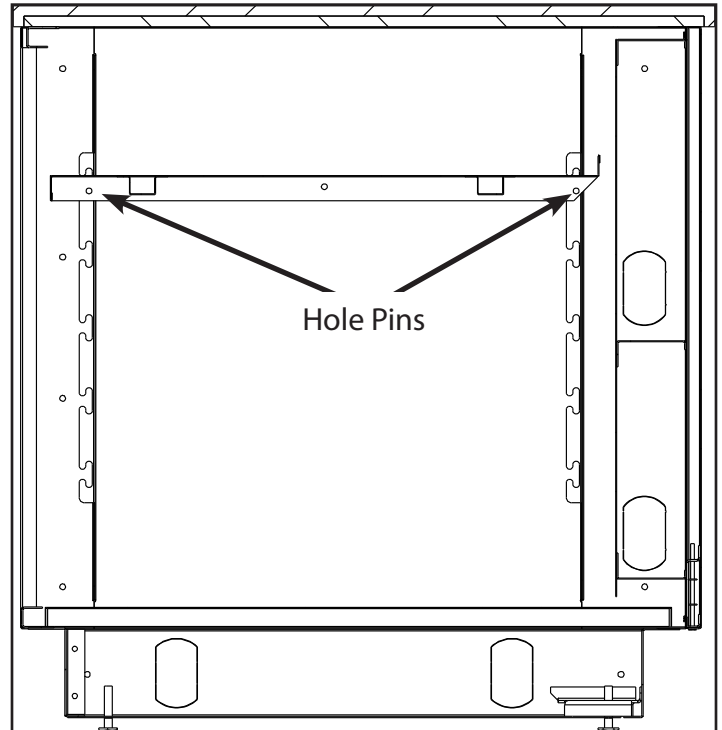

- 10** Converting to a Safe Unit
- Remove bottom shelves
 - Remove 2 bolts from each end of kick-plate rail. (Total 4)

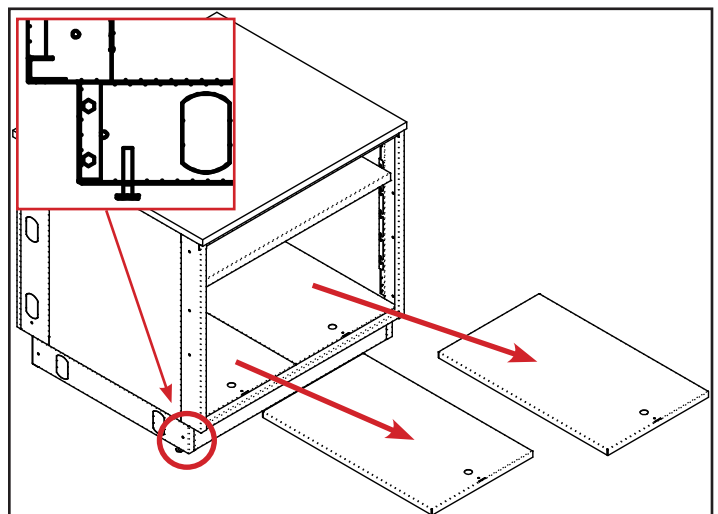

CLEANING COUNTER CORIAN® TOPS

- Moist Dirt and Residue:** Use soapy water and ammonia based cleaner, rinse and wipe completely dry.
Note: DO NOT USE WINDOW CLEANER
Commerically available surface cleaners, such as Clean EnCounters® will also work.
- Preventing Hard Water Marks:** Rinse and wipe completely dry after cleaning: clean up spills before they dry.
- Removing Hard Water Marks:** Use cleaner formulated for removing hard water marks, such as CLR® or Lime-A-Way®
- Disinfecting:** Occasionally wipe surface with diluted household bleach - 1:100 (5 Tbsp. of bleach to 1 gallon of water, as recommended by the Centers for Disease Control and Prevention for disinfection of surfaces.



Your Solutions Partner

Duke Manufacturing Co.
2305 N. Broadway
St. Louis, MO 63102

Phone: 314-231-1130
Toll Free: 1-800-735-3853
Fax: 314-231-5074

www.dukemfg.com