


Example of fixture installation directions

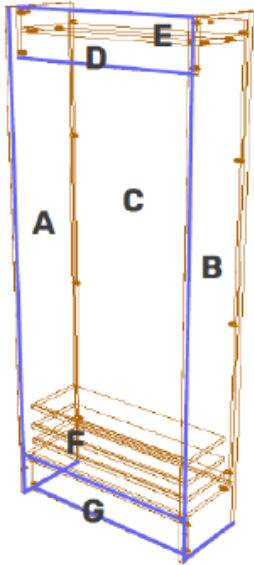

A: Left Side
B: Right Side
C: Backs
D: Ad Panel
E: Top
F: Shelf x3

* Edge Banded

1. Lay out all fixture pieces onto a **COMPLETELY FLAT** surface. Doing this on an uneven surface may produce breaks in the melamine.
 - Pound in all clips using the mallet.
 - Place glue into each shelf cut, insert plexiglass, and leave to dry.
2. Lay A (Left Side) on the floor, holes facing up.
3. Insert C (Back) into A (Left Side).
 - Clips should be facing the back of the fixture. Close the connected clips.
4. Insert E (Top) into A (Left Side).
 - Clips should be facing the top of the fixture. The hole should be positioned in the front, left corner of the fixture. Close connected clips.
5. Insert D (Ad Panel), edge banded side facing down, into A (Left Side).
 - Clips should be facing the back of the fixture. Close the connected clips.
6. Insert F (Deck), edge banded side facing the front of the fixture, into A (Left Side).
 - Clips should be facing the bottom of the fixture. Close connected clips.
7. Insert G (Toe Kick), edge banded side facing down, into A (Left Side).
 - Clips should be facing the back of the fixture. Close the connected clips.
8. Slide plastic inserts into slat wall.
 - Leave three open slats to screw slat wall to back (second from the top, middle, second from the bottom). Lip of insert facing up; see picture.
9. Set slat wall against back and screw in. Slide in other three inserts.
10. Set B (Right Side) onto the fixture, holes facing down.
 - Work from the top of the fixture to the bottom to line up all holes.
 - While holding pressure down on B (Right Side), close all clips. Double check that ALL clips are closed.
11. Move the fixture onto its back. Hold the bottom front corner of B (Right Side) steady during this step.
 - Apply feet to the fixture. Mount LED lighting if provided.
13. Stand fixture up and move into place.