



ASSEMBLY INSTRUCTIONS




Foot (4)

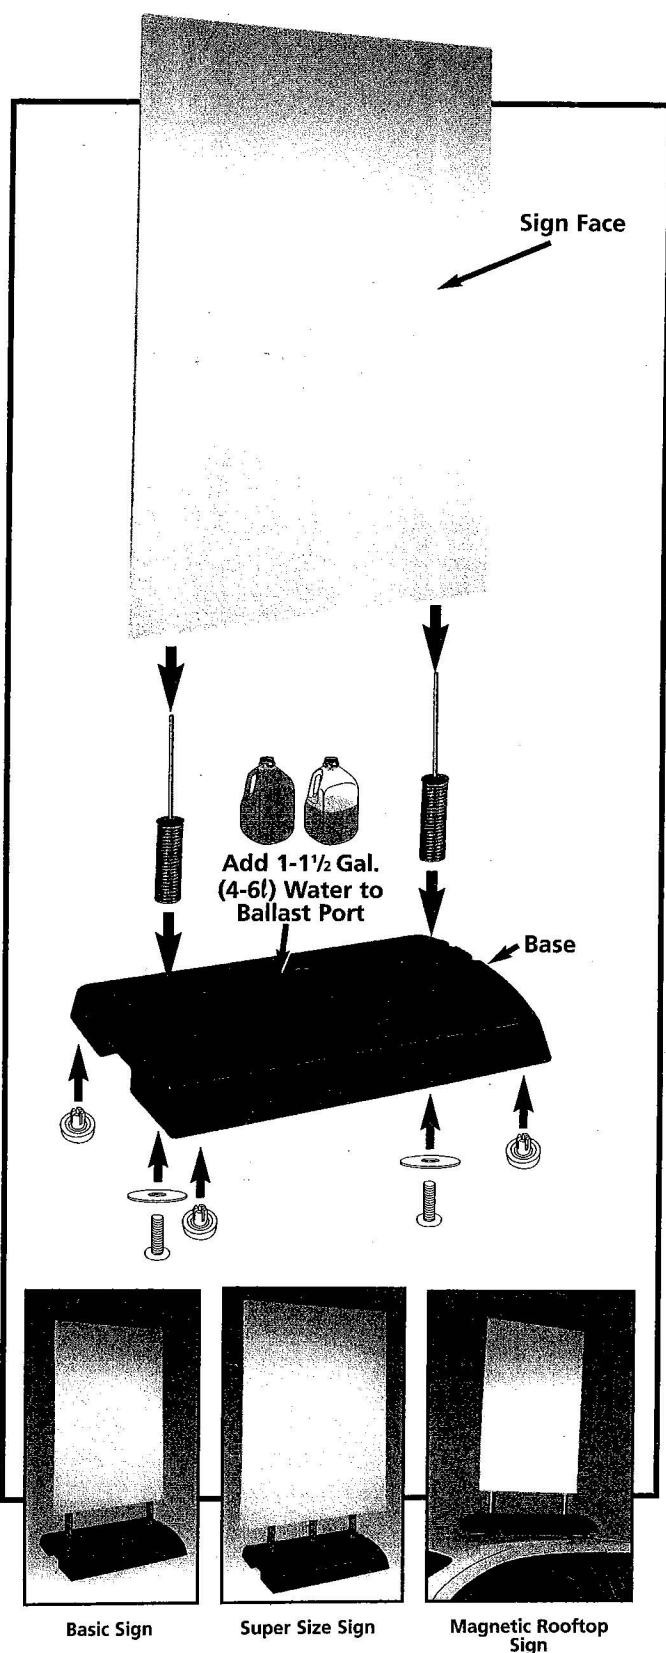

Washer (2)



Spring Assembly (2)



Truss Head Bolt (2)



Ballast Port Cap

Assembly Instructions – Basic Sign

1. Install no-mar anti-slip feet by pushing Feet into holes on bottom of **Base** and pressing drive pin in completely to lock foot into hole.
2. Attach **Spring Assembly** to **Base** using **Truss Head Bolt** and **Washer**. Insert **Truss Head Bolt** with **Washer** through outer recessed hole in bottom of **Base** and tighten into **Spring Assembly**. You may have to apply pressure to the screw when starting.
3. Add 1-1½ gallons (4-6 litres) of water into **Ballast Port** on top of **Base** and then insert **Ballast Port Cap**. The sign will now weigh 18-22 lbs (8-10kg.).
4. Attach decorated **Sign Face** to **Base** by inserting rods from **Spring Assembly** into flutes of the **Sign Face**. Make sure **Sign Face** is centered and resting on top of spring.

Magnetic Rooftop Mount

1. Install **EZ-Anchors** into holes on the bottom of the sign **Base** and screw flush with bottom using Phillips screwdriver.
2. Attach **Magnet** to **Base** using **Screw** and **Washer**. Insert **Screw** through **Washer** into the bottom of the **Magnet** and **Screw** into **EZ-Anchor**. Leave a loose fit so the **Magnets** will conform to the shape of the roof.
3. Place completed sign on roof. Sign can be positioned across the car or down the center of the car. Make sure the **Magnets** are clean and free of sand or grit before placing on roof.
4. To remove sign lift up one side then the other. DO NOT slide or pull sign as this may scratch car.

Helpful Hints

- Decorate **Sign Face** before attaching to **Base**. Keep design simple for maximum impact.
- To transport, tip sign on side using handhold and hold from **Spring**.
- To add more tension between **Sign Face** and **Spring Assembly** move rod from **Spring Assembly** outward 1-2 flutes on **Sign Face**.
- Springer signs are designed for winds up to 30 mph. In the event of higher winds bring sign inside or add more water through the **Ballast Port**.

CAUTION!

Signs are designed to be placed on top of parked cars only. **DO NOT** drive with any part of sign on roof of vehicle. Remove sign from vehicle in high winds.