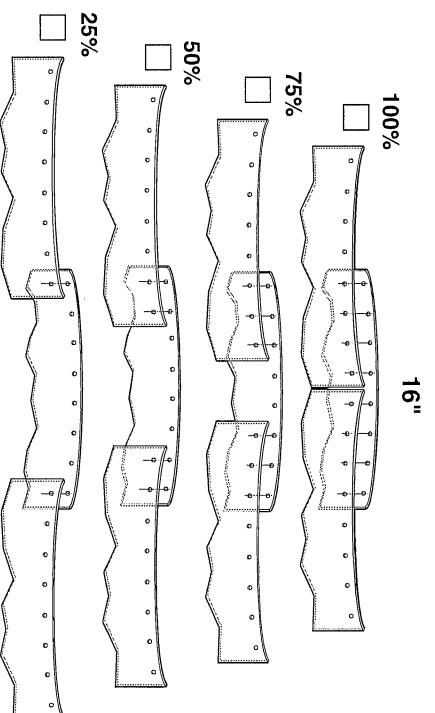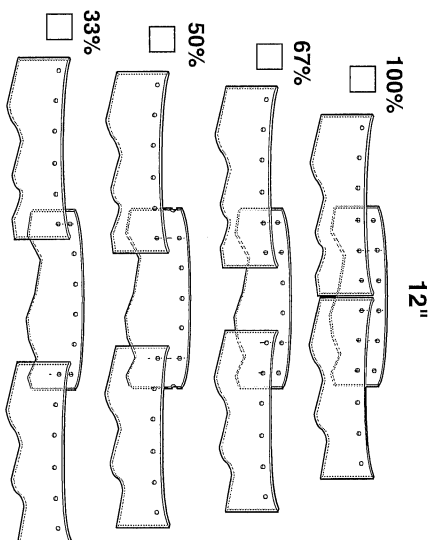# STANDARD *SAVE-T*® STRIP OVERLAP CONFIGURATIONS
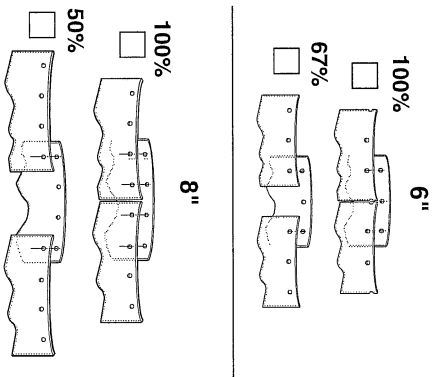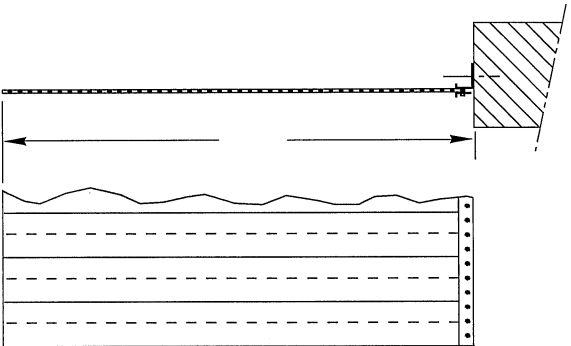
PLEASE INDICATE THE WIDTH AND OVERLAP DESIRED BY CHECKING THE APPROPRIATE BOX

6"
- ☐ 100%
- ☐ 67%
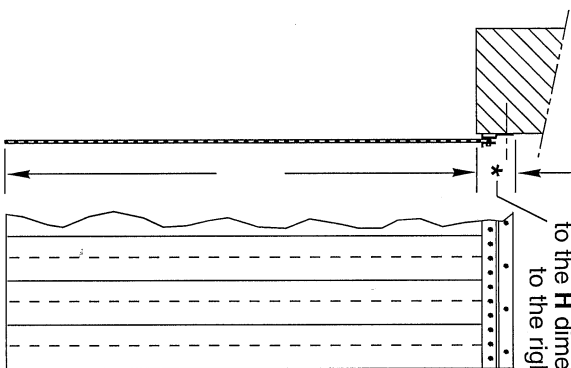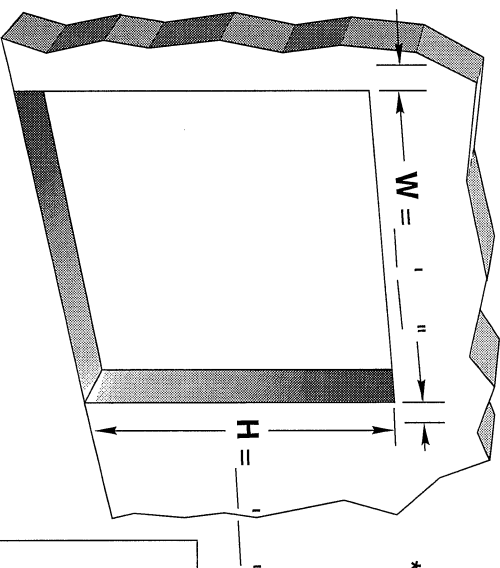
8"
- ☐ 100%
- ☐ 50%

12"
- ☐ 100%
- ☐ 67%
- ☐ 50%
- ☐ 33%

16"
- ☐ 100%
- ☐ 75%
- ☐ 50%
- ☐ 25%

HEADER MOUNT

WALL MOUNT
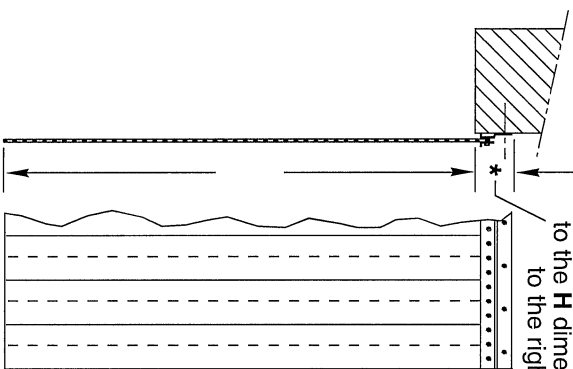
If applicable . . add this to the **H** dimension to the right

DOORWAY OPENING

PLEASE INDICATE BOTH THE HEIGHT AND WIDTH OF THE DOORWAY OPENING

W = ___ ' ___ "

H = ___ ' ___ "
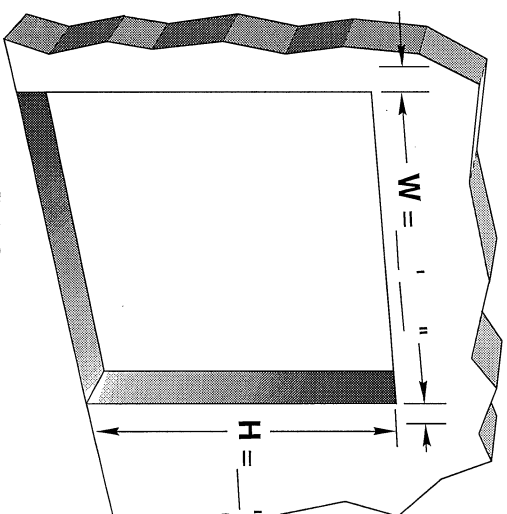
* Note:
FOR WALL MOUNT ONLY

If additional coverage is required include this in the doorway width and height

IMPORTANT
PLEASE COMPLETE THE REVERSE SIDE OF THIS FORM

TMI Incorporated
5350 Campbells Run Road
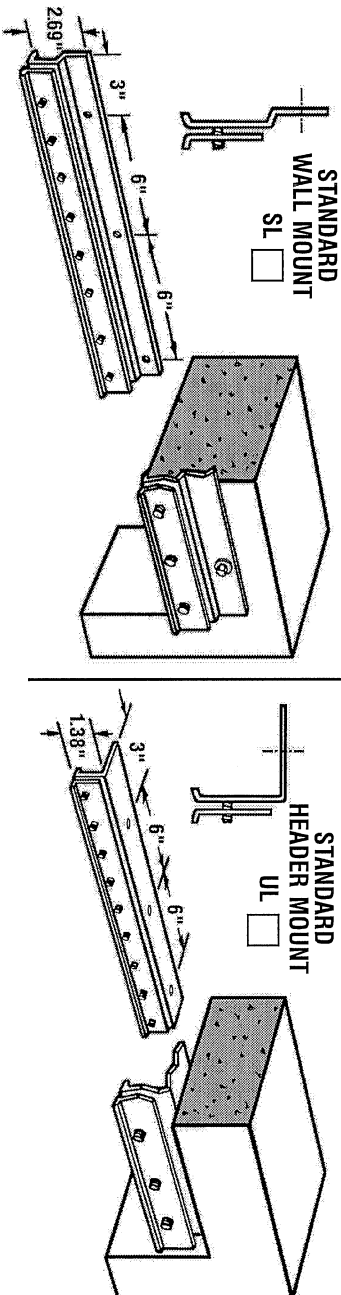Pittsburgh, PA 15205-9738

800-888-9750

Tel: 412-787-9750 • Fax: 412-787-3665

◢◤◤ INC.

SAVE-T® STRIP DOOR

STUDDED SAVE-T® STRIP DOOR HARDWARE AND TYPES OF MOUNTING

PLEASE CHECK THE APPROPRIATE BOX FOR YOUR SPECIFIC APPLICATION

IMPORTANT
PLEASE COMPLETE THE REVERSE SIDE
OF THIS FORM

WALL MOUNT
☐ PH-SL

PIANO HINGED HARDWARE

2.0"
1.76"
3"
6"
6"

HEADER MOUNT
PH-UL ☐

WALL MOUNT
☐ UM-SL

2.69"
3"
6"
6"

STANDARD WALL MOUNT
SL ☐

UNIVERSAL HARDWARE

2.61"
3"
6"
6"

STANDARD HEADER MOUNT
UL ☐

1.38"
3"
6"
6"

HEADER MOUNT
UM-UL ☐

800-888-9750

TMI Incorporated
5350 Campbells Run Road
Pittsburgh, PA 15205-9738
INC.   Tel: 412-787-9750   Fax: 412-787-3665

STANDARD SAVE-T® STRIP DOORS

REVISIONS		
NO.	DATE	DESCRIPTION

DRAWING BY: CHECKED BY:
DATE   DATE
SHEET   OF

SAF-T® LOC STRIP DOOR HARDWARE AND TYPES OF MOUNTING
PLEASE CHECK THE APPROPRIATE BOX FOR YOUR SPECIFIC APPLICATION

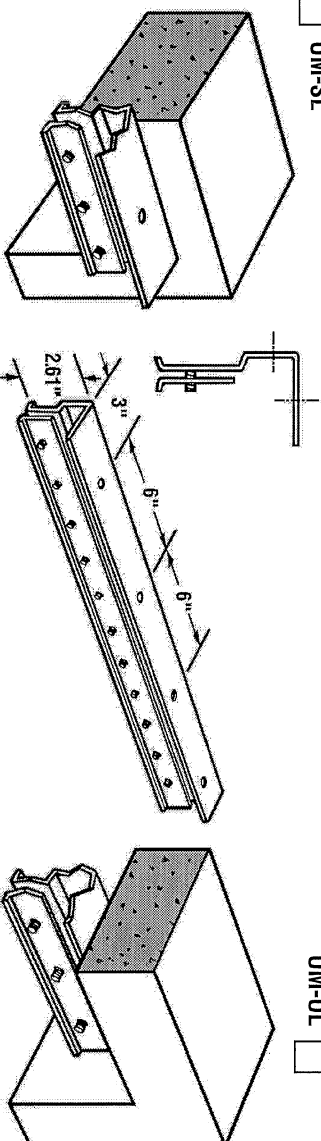The SAF-T® LOC System

PVC LOC Tab

STANDARD
WALL MOUNT
SL-LC

2.68"
3"
2"
6"
LOC Studs
5/16" Diameter

STANDARD
HEADER MOUNT
UL-LC

1.53"
3"
2"
6"
LOC Studs
5/16" Diameter

PVC LOC Tab

UNIVERSAL HARDWARE

UNIVERSAL
WALL MOUNT
UM-SL-LC

2.62"
3"
2"
6"
LOC Studs
5/16" Diameter

PVC LOC Tab

UNIVERSAL
HEADER MOUNT
UM-UL-LC

PVC LOC Tab

CUSTOMER:
ADDRESS:
CITY/STATE:
JOB:
MODEL:
LOCATION:

IMPORTANT
PLEASE COMPLETE THE REVERSE SIDE
OF THIS FORM

CERTIFIED FOR CONSTRUCTION

TO:
DATE:
COMPANY:
CITY/STATE:

TMI INC. DEALER REPRESENTATIVE

COMPANY:
ADDRESS:
CITY/STATE:
PHONE (   )   EXT.

TMI, LLC
5350 Campbells Run Road
Pittsburgh, PA 15205-9738

800-888-9750 LLC   Tel: 412-787-9750 • Fax: 412-787-3665

SAF-T® LOC STRIP DOORS

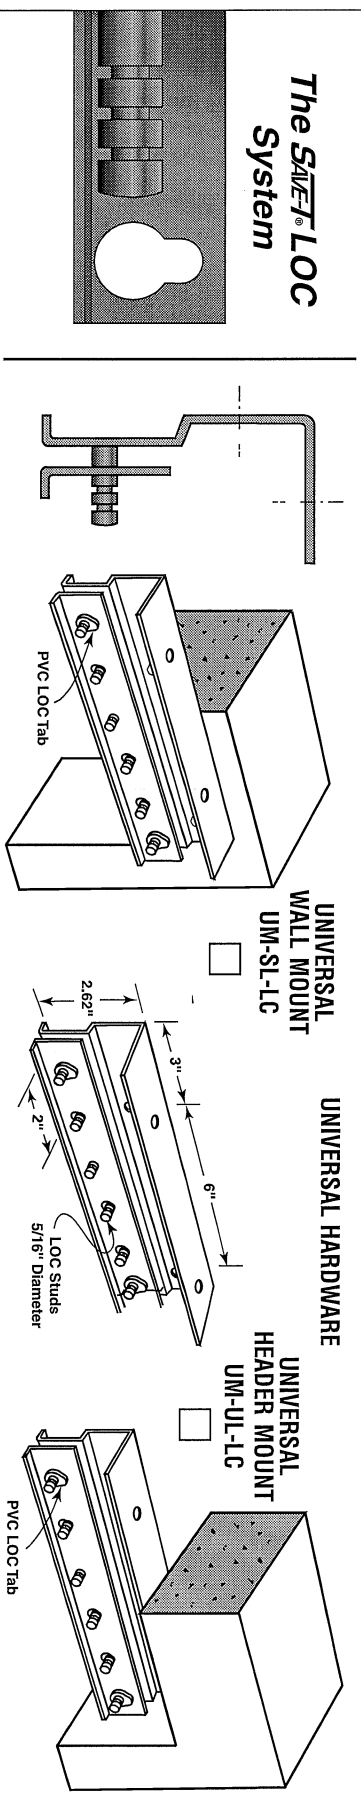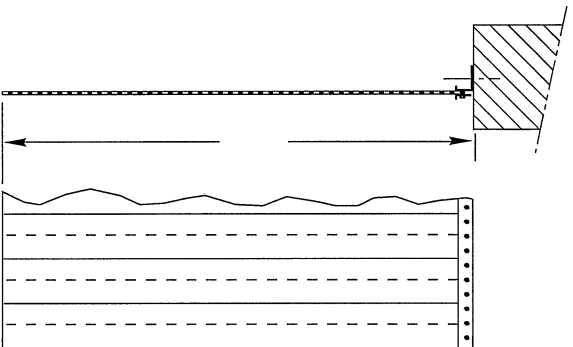DRAWING BY: CHECKED BY:
DATE: DATE:

SHEET   OF

REVISIONS			
	NO.	DATE	DESCRIPTION

STANDARD SAVE-T® STRIP OVERLAP CONFIGURATIONS

PLEASE INDICATE THE WIDTH AND OVERLAP DESIRED BY CHECKING THE APPROPRIATE BOX

6"
- ☐ 100%
- ☐ 67%
- ☐ 50%

8"
- ☐ 100%
- ☐ 67%
- ☐ 50%

12"
- ☐ 100%
- ☐ 67%
- ☐ 50%
- ☐ 33%

16"
- ☐ 100%
- ☐ 75%
- ☐ 50%
- ☐ 25%

HEADER MOUNT

H

WALL MOUNT

*

If applicable . . add this to the **H** dimension to the right

DOORWAY OPENING

PLEASE INDICATE BOTH THE HEIGHT AND WIDTH OF THE DOORWAY OPENING

W = ' "

H = ' "

* Note:
FOR WALL MOUNT ONLY

If additional coverage is required include this in the doorway width and height

IMPORTANT
PLEASE COMPLETE THE REVERSE SIDE OF THIS FORM

M-SERIES PVC STRIP DOORS

BRACKET HARDWARE

13/4"
11/2"
31/4"

OVERLAP CONFIGURATION

Strip Overlap

Heat Sealed Loops

WALL MOUNTING
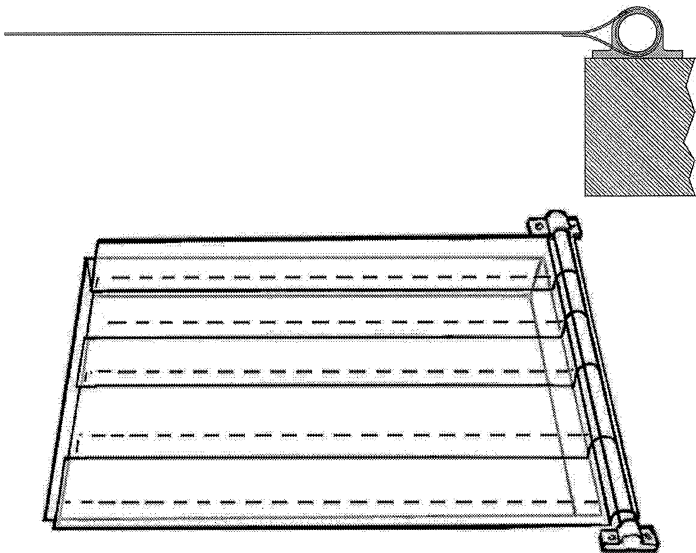
HEADER MOUNTING
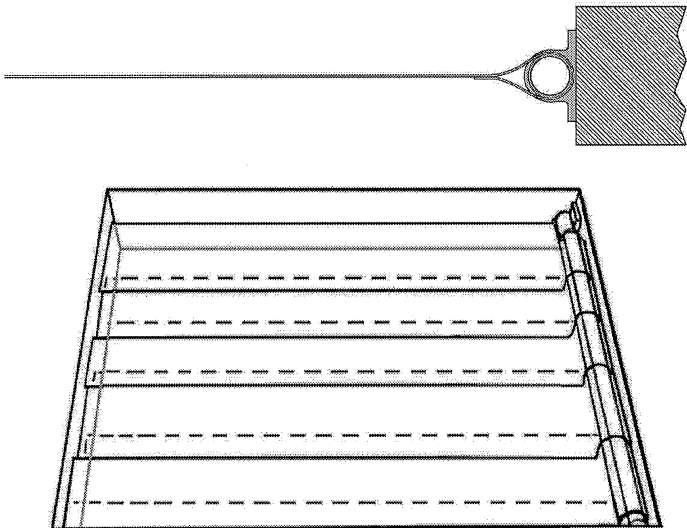
OPENING SIZE: _____ ” Wide x _____ High

STRIP DOOR SIZE (Ex: 3486 = 34" Wide x 86" High)

WIDTH		HEIGHT	
☐ 34	☐ 60	☐ 80	
☐ 40	☐ 66	☐ 86	
☐ 47	☐ 73	☐ 96	
☐ 53	☐ 79		

Other: _____   Other: _____

PVC STRIP MATERIAL
☐ STANDARD CLEAR (0° to 150° F)
☐ USDA POLAR GRADE (-20° to 140° F)
☐ EXTRA LOW TEMP GRADE (-40° to 140° F)

STRIP WIDTH X THICKNESS
☐ 4" WIDE X .060" THICK
☐ 6" WIDE X .060" THICK (STANDARD CLEAR ONLY)
☐ 6" WIDE X .060" THICK
☐ 8" WIDE X .080" THICK

UNIVERSAL MOUNTING STYLE HARDWARE
☐ IN-JAMB
☐ WALL/SURFACE MOUNT

CURTRON M-SERIES PVC STRIP DOOR

JOB NAME/LOCATION

CUSTOMER/LOCATION

CUST. ORDER NO.

CUST. PO ORDER NO.