



928CJ1400

Citrus Juicer

SAFETY


Juicer should only be operated by trained individuals.
Make sure to read the operation and safety manual before using.

- Read all instructions before use.
- Check the voltage before plugging in the juicer.
- Ensure the switch is off before plugging in the juicer.
- Never submerge the motor base in water.
- Unplug from the power supply when not in use, before adding or removing parts, and before cleaning.
- Do not operate the juicer with a damaged cord or plug.
- Do not let the cord hang over the edge of the counter or touch a hot surface.
- Avoid contact with moving parts.

ASSEMBLY

Make sure unit is off and unplugged before assembly and disassembly.

1. Position the bowl so it is flat on the motor housing.
2. Adjust the spout position so it extends over the motor base opening.
3. Place the desired sized reamer and pulp strainer inside the bowl and rotate until the motor drive coupling is in position.
4. Attach the splash guard onto the bowl.

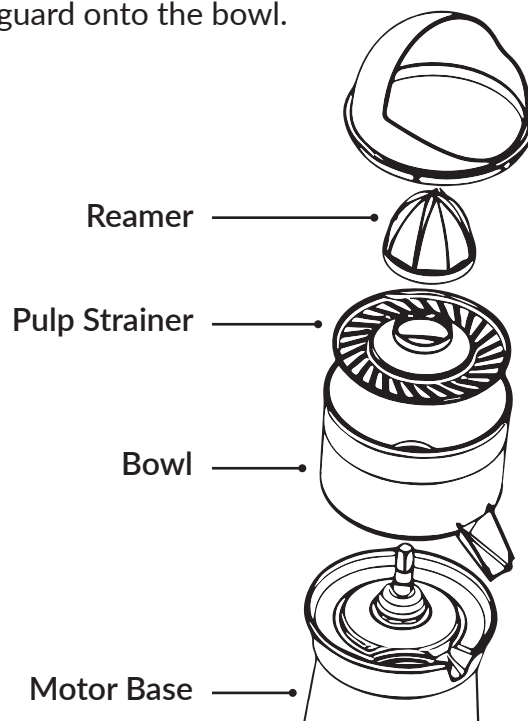

OPERATION

1. After unit is properly assembled (see assembly instructions), plug into proper 120V outlet.
2. Switch unit to “ON” (allow motor to reach full speed before proceeding).
3. Place halved citrus fruit on reamer and apply firm downward pressure.
4. DO NOT press so hard that the reamer stops spinning. This can wear down the motor over time and is not necessary to juice the citrus fruit being used.

CAUTION: AVOID CONTACT WITH MOVING PARTS.

CLEANING

Make sure unit is off and unplugged before assembly and disassembly.

1. Remove all plastic parts from the motor housing.
2. Wipe motor base and all external surfaces with soft, damp cloth.
CAUTION: DO NOT SUBMERGE THE MOTOR BASE IN WATER.
3. Wash plastic parts with mild soap (such as Noble Chemical’s 147SUNBRIGHT) and warm water.
4. Allow parts to dry and reassemble (see assembly instructions).