

Bolt Down Base

ASSEMBLY INSTRUCTIONS



LANCASTER™
TABLE & SEATING

EXCALIBUR


SIGNATURE LINE OF INDOOR & OUTDOOR TABLES

PARTS LIST:


A Dust Cover 1/PC



C Base Plate 1/PC




B Column & Top Plate 1/PC

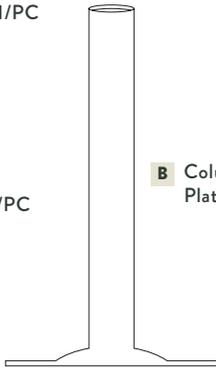

HARDWARE:

D Serrated Flange Bolt 1/PC



E Tabletop Screws 8/PCS



NOTES:


1. Inspect all pieces for damage before assembly. Do not assemble if any pieces are broken or damaged.
2. Ensure you have all required pieces before assembly.

TOOLS NEEDED:

- Wrench
- Screwdriver
- Drill (Optional)


STEP 1

Flip the column and top plate upside down with the top plate resting on the ground. Remove the bolt from the bottom of the column.

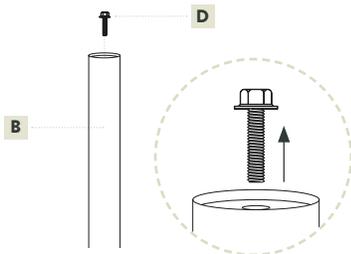


STEP 2

Slide the dust cover upside down onto the column as shown.




STEP 3

Place base plate on column and secure with bolt.



STEP 4


Flip the assembled base right side up.



STEP 5

Place base plate at the desired location and bolt to the floor.

(Mounting hardware is not included; professional installation recommended.)



STEP 6

Slide dust cover over the mounting plate. The tabletop can now be mounted to the base using the included table top screws. Be sure to measure your table top thickness and verify that the screw length is correct.

