





### Install Trim Plate Kit

1. Drill the trim plate mounting holes in the deck. See drilling requirements in the illustration below.

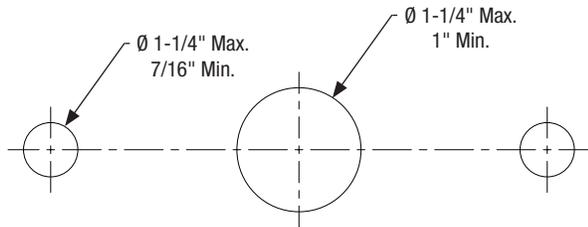


2. Attach the trim plate to the deck (gasket is already adhered to the trim plate). See illustration below.

*NOTE: Tighten the trim plate nuts to a maximum of 25 in-lb. It is normal for the washer to slightly bend when tightened.*

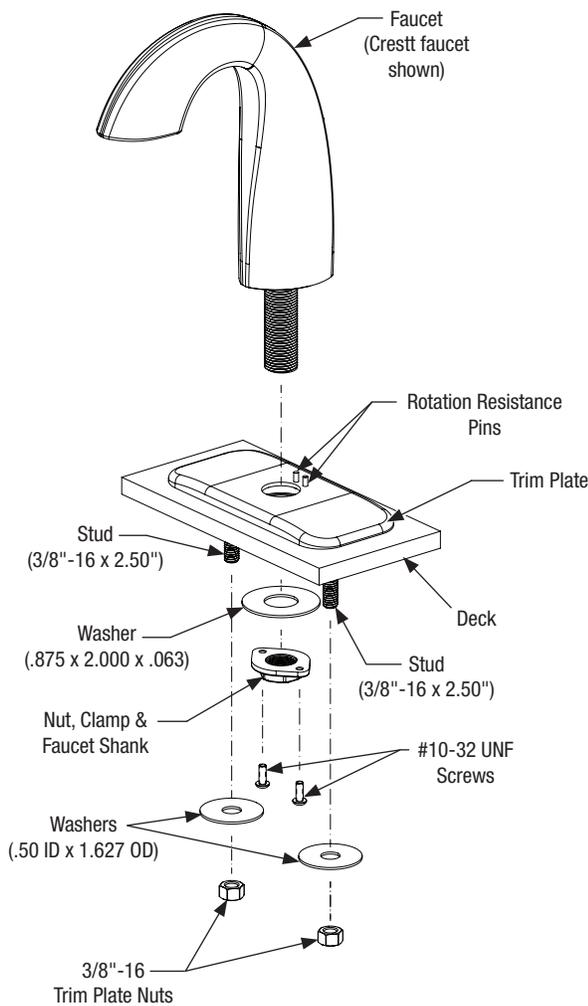

3. Attach the faucet to the trim plate as shown below.

*NOTE: When attaching the faucet to the trim plate, verify the rotation resistance pins sit between the webs of the faucet casting and go through the gasket on the bottom of the faucet.*

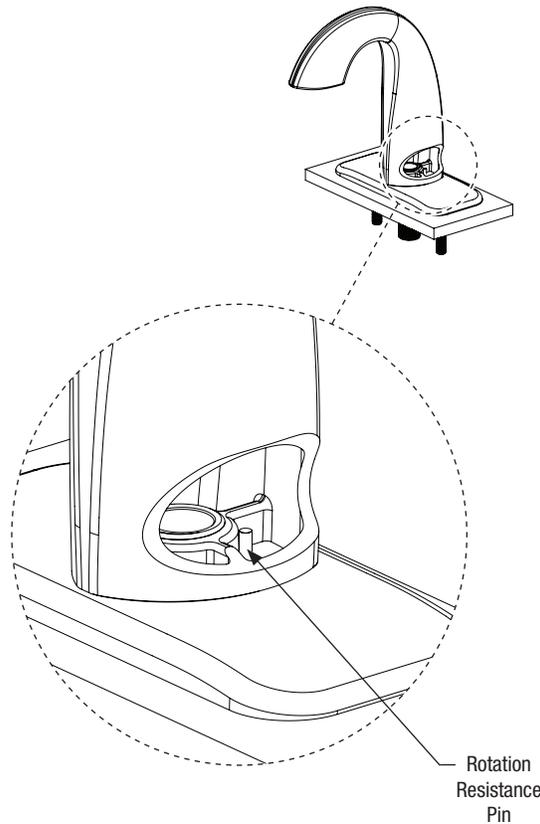

For proper installation and torque requirements, scan or click on the code to view the Verge Faucet Installation Guide.