

COXREELS® 1175 Series "Competitor" hand crank and motorized hose reels, like the 1125 Series, is an industry preferred design built with a larger chassis for larger hose capacities and hose diameters. They feature a sturdy one piece all welded "A" frame base, low profile outlet riser opendrum slot design for smooth even hose wraps around the drum.

1175 SERIES MODELS - ALL REELS SUPPLIED LESS HOSE

MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL ASSEMBLY	OUTLET RISER	PSI	APRX. LBS.	SIZE INDEX
	I.D.	O.D.	FT.	I.D.	O.D.	FT.					
1175-6-50	1"	1 7/16"	50	3/4"	1 1/4"	100	1" F NPT 90°	1" F NPT	3,000	67	1
1175-6-100	1"	1 7/16"	100	3/4"	1 1/4"	150	1" F NPT 90°	1" F NPT	3,000	70	2
1175-6-125	1"	1 7/16"	125	3/4"	1 1/4"	200	1" F NPT 90°	1" F NPT	3,000	72	3
1175-6-135	1"	1 7/16"	135	3/4"	1 1/4"	175	1" F NPT 90°	1" F NPT	3,000	70	6
1175-6-150	1"	1 7/16"	150	3/4"	1 1/4"	250	1" F NPT 90°	1" F NPT	3,000	75	4
1175-6-200	1"	1 7/16"	200	3/4"	1 1/4"	300	1" F NPT 90°	1" F NPT	3,000	83	5



1175-E Series with optional 4-way roller bracket

1175 Series

MOTOR OPTIONS When ordering, suffix the model number with selection below. *Add 5 lbs to ship weight if reel is crated

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. LBS*
A	AIR - #4 GAST	COMP. AIR MOTOR	8
AB	AIR - #6 GAST	COMP. AIR MOTOR	8
E	ELEC. - 12V DC	1/3 HP REW. REV. TYPE	13
EF	ELEC. - 24V DC	1/3 HP REW. REV. TYPE	13
EB	ELEC. - 24V DC	1/2 HP REW. REV. TYPE	26
ED	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REW. REV. TYPE	26
EA	ELEC. - EXPL. PRF. - 115V	1/2 HP REW., AC REV. TYPE	26
H	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6
C	FRONT HAND CRANK	BEVEL GEARED CRANK	3


REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	W			H		L	X	Y	Ø	Dw
	CRANK	ELEC.	AIR / HYD.	CRANK	ELEC.					
1	24½"	22"	20½"	26½"	26½"	24"	13"	20½"	10½"	7½"
2	28½"	26"	24½"	26½"	26½"	24"	17"	20½"	10½"	11½"
3	30½"	28"	26½"	26½"	26½"	24"	19"	20½"	10½"	13½"
4	32½"	30"	28½"	26½"	26½"	24"	21"	20½"	10½"	15½"
5	36⅝"	34½"	33"	26½"	26½"	24"	25½"	20½"	10½"	20"
6	36⅝"	34½"	33"	22"	22⅞"	20"	25½"	18½"	10½"	20"
Overall Dimensions						Base			Drum	

Overall Dimensions

Base

Drum

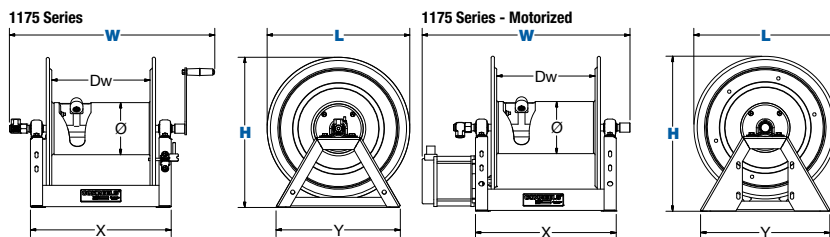

MOBILIZE YOUR REEL Complete accessory info on page 53

COXREELS® ACCESSORY FOR 1125, 1175 & 1185 SERIES		
	PORTABLE HOSE REEL CART	
	<ul style="list-style-type: none"> Steel round handle detaches for compact storage Steel front legs with rubber feet prevent sliding High grade ball bearings with hardened cup 1/2" diameter steel axle Solid 8" rubber tires See page 53 for complete list 	
	CARRY HANDLES	
	<ul style="list-style-type: none"> Easily bolts to "a" frame making the reel portable 1" tube steel construction Powder coated crinkle black See page 53 for complete list 	

1175 SERIES :: REEL SPECIFICATIONS

SWIVEL

- External fluid path with nickel plated steel 90° full-flow NPT swivel inlet
- Swivel Seals: AFLAS

DESIGN & STRUCTURE

- All welded steel "A" frame construction for superior reel structure
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation
- Adjustable tension brake to prevent "free-wheeling" during operation
- Long-handled locking pin to secure reel from rotation during transport or storage

RETRACTION

- Reliable chain & sprocket drive on motor driven models
- Solid steel direct hand crank with smooth round handle
- See Motor Options Chart

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- Water Trucks
- Construction Sites
- Fire Suppression
- Chemical Fluid Transfer
- Lubricant Dispensing
- Farming
- High-Flow Watering
- Chemical Fluid Transfer

ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories

