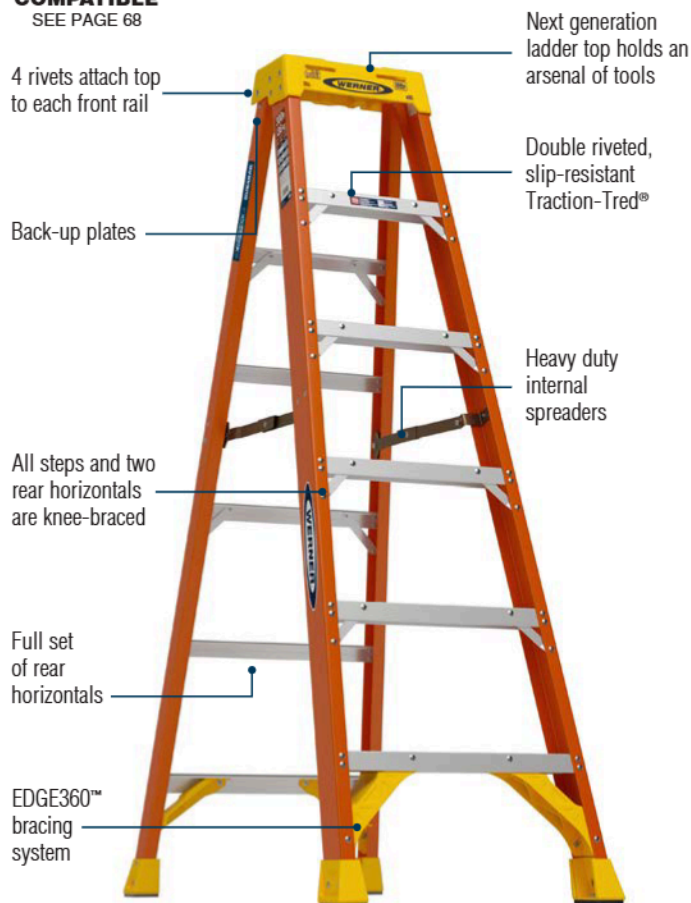


**6200 SERIES** Step Ladder**300lbs.** LOAD CAPACITY**TYPE IA**  
DUTY RATING**COMPATIBLE**  
SEE PAGE 68

Model 6206


- EDGE360™ features Integrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails
- Optional yellow molded pail shelf kit, model no. 76-2
- DURARAIL system engineered for maximum durability to withstand the toughest job site conditions

**SPECIFICATIONS**

| Model No. | Size | Approx. Width | Approx. Spread | Approx. Cu. Ft. Per Unit | Approx. Shipping Wt. Lbs. |
|-----------|------|---------------|----------------|--------------------------|---------------------------|
| 6203      | 3'   | 18-1/8"       | 23-1/8"        | 2.0                      | 13.0                      |
| 6204      | 4'   | 19-7/8"       | 29"            | 3.0                      | 16.0                      |
| 6205      | 5'   | 21-5/8"       | 35-1/8"        | 4.1                      | 19.0                      |
| 6206      | 6'   | 23-3/8"       | 41-1/4"        | 5.3                      | 22.0                      |
| 6207      | 7'   | 25-1/8"       | 47-1/2"        | 6.6                      | 26.0                      |
| 6208      | 8'   | 26-7/8"       | 53-5/8"        | 8.1                      | 30.0                      |
| 6210      | 10'  | 30-3/8"       | 65-7/8"        | 12.5                     | 39.0                      |
| 6212      | 12'  | 33-7/8"       | 78-1/4"        | 15.0                     | 48.0                      |

**DIMENSIONS**

|               |              |              |              |
|---------------|--------------|--------------|--------------|
| Top:          | 5-3/4" x 13" | Steps:       | 3" wide      |
| Front Rails:  | 3-1/8" wide  | Rear Rails:  | 1-7/8" wide  |
| Front Flange: | 1-3/16" wide | Rear Flange: | 1-3/16" wide |

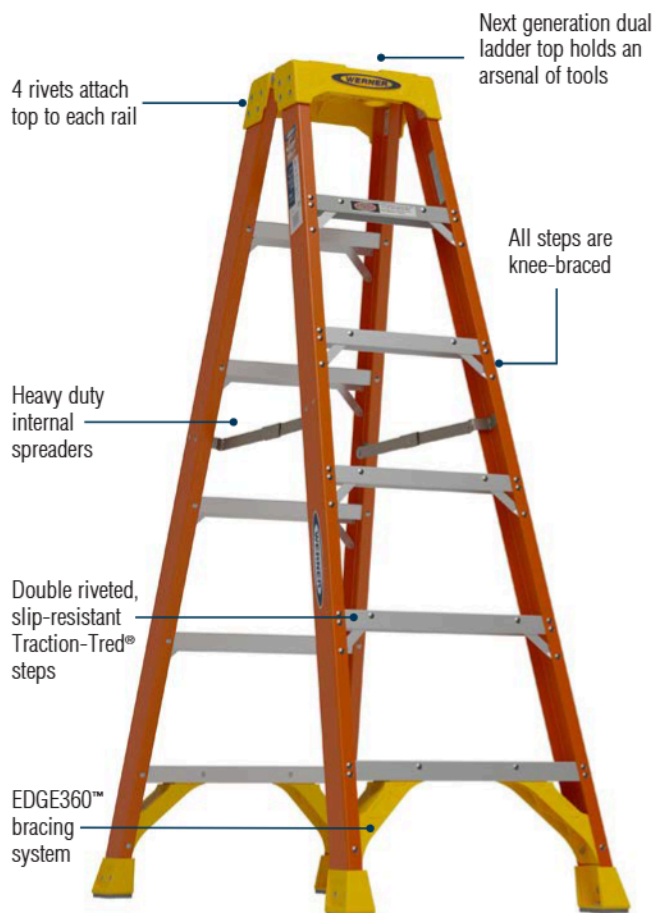**T6200 SERIES** Twin Step Ladder††**300lbs.** LOAD CAPACITY PER SIDE**TYPE IA**  
DUTY RATING

Model T6206

- EDGE360™ features Integrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails

**SPECIFICATIONS**

| Model No. | Size | Approx. Width | Approx. Spread | Approx. Cu. Ft. Per Unit | Approx. Shipping Wt. Lbs. |
|-----------|------|---------------|----------------|--------------------------|---------------------------|
| T6203     | 3'   | 18-1/8"       | 29"            | 3.1                      | 16.0                      |
| T6204     | 4'   | 19-7/8"       | 36-1/8"        | 4.6                      | 19.0                      |
| T6205     | 5'   | 21-5/8"       | 43-1/8"        | 6.2                      | 23.0                      |
| T6206     | 6'   | 23-3/8"       | 50-1/8"        | 8.0                      | 27.0                      |
| T6208     | 8'   | 26-7/8"       | 64-1/8"        | 12.3                     | 37.0                      |
| T6210     | 10'  | 30-3/8"       | 78-1/8"        | 17.3                     | 54.5                      |
| T6212     | 12'  | 33-7/8"       | 92-1/8"        | 23.2                     | 68.5                      |

††Designed for one or two person jobs. Note: When used as a double Step Ladder, the maximum load per side, including person and materials, shall not exceed the duty rating of ladder.

**DIMENSIONS**

|        |              |         |              |
|--------|--------------|---------|--------------|
| Top:   | 8-1/2" x 13" | Steps:  | 3" wide      |
| Rails: | 3-1/8" wide  | Flange: | 1-3/16" wide |