



7300 SERIES Step Ladder

375lbs. LOAD CAPACITY

TYPE IAA
DUTY RATING



Model 7306

- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7303	3'	19-3/4"	23-1/2"	2.5	13.0
7304	4'	21-1/2"	29-3/4"	3.5	16.0
7305	5'	23-1/4"	35-7/8"	4.6	19.5
7306	6'	25"	42"	5.8	22.5
7308	8'	28-1/2"	54-3/4"	8.5	31.0
7310	10'	32"	66-5/8"	11.4	40.5
7312	12'	35-1/2"	79"	14.8	50.0

DIMENSIONS

Top:	7-1/4" x 14-7/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

7300S SERIES Step Ladder with Pail Shelf

375lbs. LOAD CAPACITY

TYPE IAA
DUTY RATING



Model 7306S

- EDGE360™ features Intergrated Rail Shields, Energy Diffusing Geometry, and Oversized Foot Pads
- Every rivet backed up by metal plate or washer to protect rails

SPECIFICATIONS

Model No.	Size	Approx. Width	Approx. Spread	Approx. Cu. Ft. Per Unit	Approx. Shipping Wt. Lbs.
7303S	3'	19-3/4"	23-1/2"	2.5	16.5
7304S	4'	21-1/2"	29-3/4"	3.5	19.5
7305S	5'	23-1/4"	35-7/8"	4.6	23.0
7306S	6'	25"	42"	5.8	26.0
7308S	8'	28-1/2"	54-3/4"	8.5	34.0
7310S	10'	32"	66-5/8"	11.4	43.5
7312S	12'	35-1/2"	79"	14.8	53.0

DIMENSIONS

Top:	7-1/4" x 14-7/8"	Steps:	3" wide
Front Rails:	3-1/8" wide	Rear Rails:	1-7/8" wide
Front Flange:	1-3/16" wide	Rear Flange:	1-3/16" wide

L7300 SERIES Leansafe Ladder

375lbs. LOAD CAPACITY

TYPE IAA
DUTY RATING



Model L7300

- Designed to lean up against walls, corners and poles
- Non-marring rubber pad protects the wall in leaning mode
- LEANSAFE™ ladder top is designed to secure tools and increase productivity
- Front and rear rail are different color for added visual safety
- Rail latch locks legs together when in leaning mode
- Curved foot pads to maximize surface area when in Step Ladder and leaning mode

SPECIFICATIONS


Model No.	Size	Step ladder Mode		Leaning Mode	
		Max. Standing Height	Max. Reach Height	Max. Standing Height	Max. Reach Height
L7304	4'	1'-8"	8'-4"	10'	7'-3"
L7306	6'	3'-10"	10'	2'-10"	9'
L7308	8'	5'-9"	12'	4'-9"	11'
L7310	10'	7'-8"	14'	6'-8"	13'
L7312	12'	9'-7"	16'	8'-7"	15'

*assumes a 5'-7" person with a vertical 12" reach

L6200 SERIES Leansafe Ladder

300lbs. LOAD CAPACITY

TYPE IA
DUTY RATING

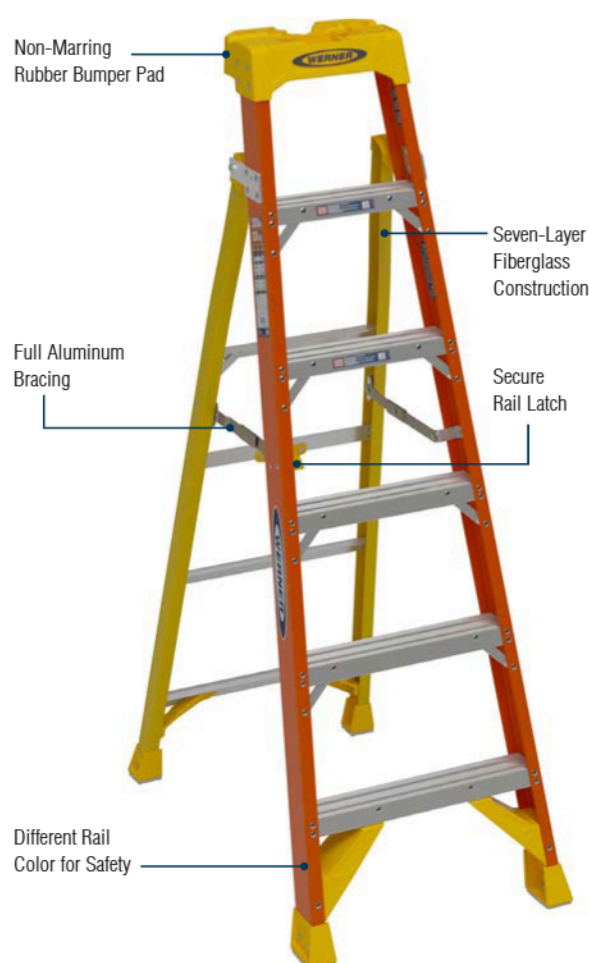

Model L6200

- Designed to lean up against walls, corners and poles
- Non-marring rubber pad protects the wall in leaning mode
- LEANSAFE™ ladder top is designed to secure tools and increase productivity
- Front and rear rail are different color for added visual safety
- Rail latch locks legs together when in leaning mode
- Curved foot pads to maximize surface area when in Step Ladder and leaning mode

SPECIFICATIONS

Model No.	Size	Step ladder Mode		Leaning Mode	
		Max. Standing Height	Max. Reach Height	Max. Standing Height	Max. Reach Height
L6204	4'	1'-8"	8'-4"	10'	7'-3"
L6206	6'	3'-10"	10'	2'-10"	9'
L6208	8'	5'-9"	12'	4'-9"	11'
L6210	10'	7'-8"	14'	6'-8"	13'
L6212	12'	9'-7"	16'	8'-7"	15'

*assumes a 5'-7" person with a vertical 12" reach