

AUTOMATION FOR A BETTER, SAFER KITCHEN



The MenuPilot® application, coupled with streamlined corporate management of menu data via the MenuCommand® web portal, reduces dependence on hardware and increases emphasis on platform. Together, these facilitate the centralized management and communication of critical menu data and training materials to foodservice operations. DayMark also delivers companion hardware with the Matt85™ direct thermal label printer and Android tablet, facilitating on-demand production of shelf-life, food rotation and complex grab & go product labeling.

THE DIFFERENCE IS NIGHT AND DAY.™

#3492-DIS
030320

800.847.0101

daymarklabels.com

DayMark®
Safety Systems

Kitchen Automation Platform




Features and Benefits

- Accessible from any internet connection
- Shelf life, nutritional facts, allergen information and prep data can be organized, monitored and modified virtually anytime and anywhere
- Updates are securely and efficiently pulled in via the cloud
- Data changes can be communicated to staff at all locations immediately
- Seamlessly integrates with the Nutritics solution
- Video and recipe data can be uploaded at a central location and automatically shared with all connected store locations
- Provides a comprehensive overview, including announcements, account metrics and number of users currently using the platform
- Allows users to print labels wirelessly
- Eliminates the need to make costly repairs and maintain labor-intensive repair depots

Complete Food Labeling System

	Item #	Description
A	IT119386	Matt85 Tablet 2.0 with Cover
B	IT118379	Matt85 Printer
C	IT118562	Wall Mount Bracket for Matt85 Printer
D	IT118589	Multi-Flex Stand and Wall Mount for Matt85 Tablet
E	IT118559	G-Hold Megastick

Direct Thermal Labels

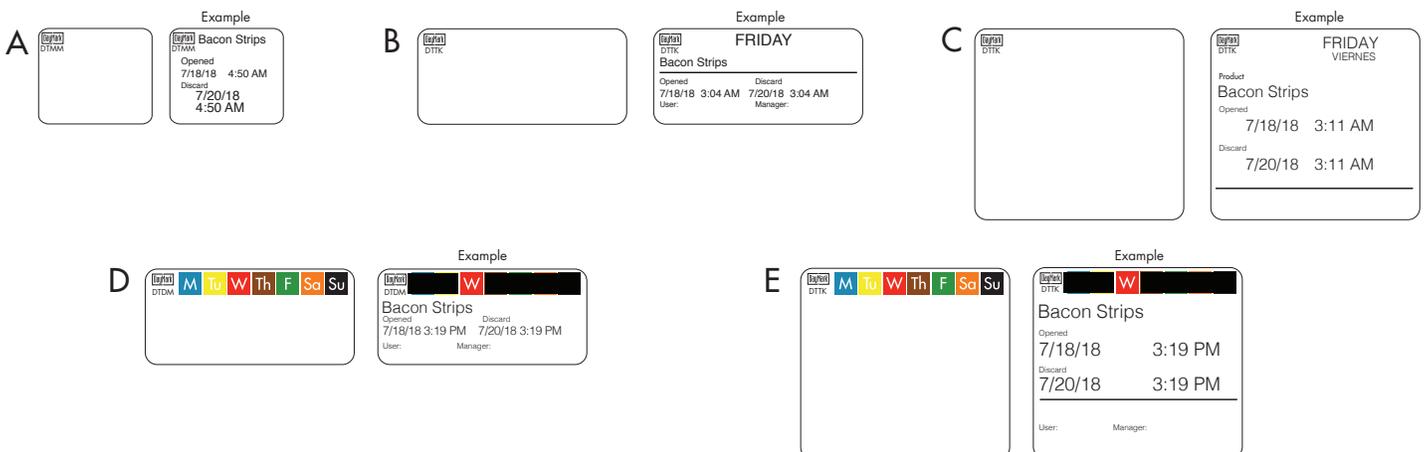

FOOD SAFETY




KITCHEN AUTOMATION


THE DIFFERENCE IS NIGHT AND DAY.™

Direct Thermal Labels

F-I

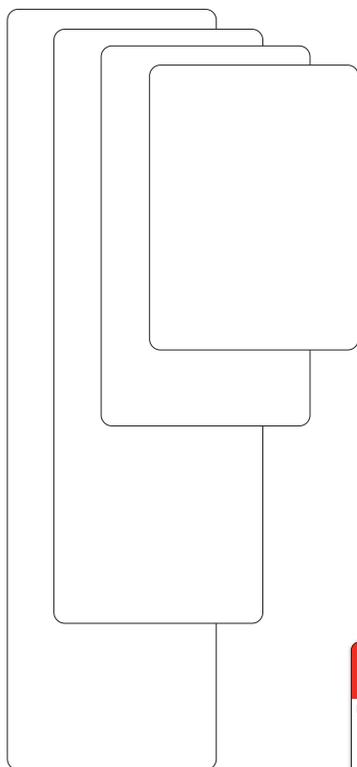


Examples

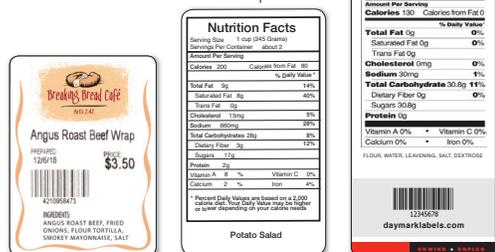

	Size	Description	Adhesive	Quantity	IT Code
A	1.2" x 1"	Blank Label	MoveMark™	2000/roll	IT115739
			DuraMark™	2000/roll	IT115734
			DissolveMark™	2000/roll	IT115853
B	2.2" x 1"	Blank Label	ToughMark™	2000/roll	IT115695
			DissolveMark™	2000/roll	IT115691
			MoveMark™	2000/roll	IT115740
			DuraMark™	2000/roll	IT115735
C	2.2" x 2"	Blank Label	ToughMark™	1000/roll	IT115697
			DissolveMark™	1000/roll	IT115693
			MoveMark™	1000/roll	IT115741
			DuraMark™	1000/roll	IT115736
D	2.2" x 1"	Day of the Week	ToughMark™	2000/roll	IT115696
			DissolveMark™	2000/roll	IT115692
			MoveMark™	2000/roll	IT115742
E	2.2" x 2"	Day of the Week	ToughMark™	1000/roll	IT115698
			DissolveMark™	1000/roll	IT115694
			MoveMark™	1000/roll	IT115743
F	2.2" x 3"	Blank Label	DuraMark™	750/roll	IT115737
G	2.2" x 4"	Blank Label	DuraMark™	500/roll	IT115738
H	2.2" x 6.25"	Blank Label	DuraMark™	350/roll	IT117418
I	2.2" x 8"	Blank Label	DuraMark™	250/roll	IT117814
J	2.2" x 4"	Tamper Evident	TamperSeal™	500/roll	IT118675
K	2.2" x 6.25"	Tamper Evident	TamperSeal™	350/roll	IT118676

J, K

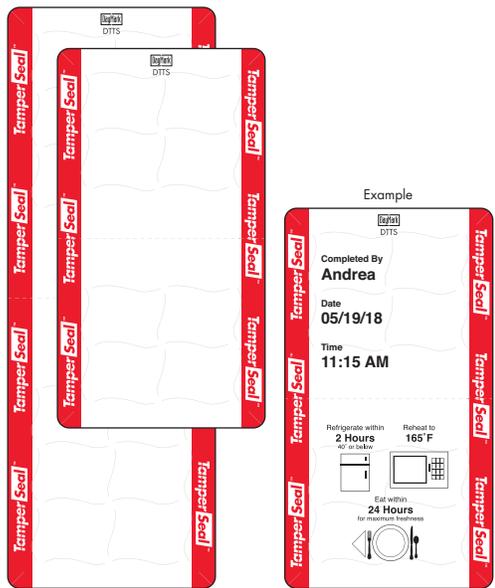

*Labels shown are not actual size.

800.847.0101

daymarkkabels.com





AUTOMATED FOOD LABELING FOR A BETTER, SAFER KITCHEN



Cloud-based Corporate Dashboard

Secure, centralized oversight of menu items, recipes and training information



App-driven Kitchen Interface

Ensured efficiencies and food labeling compliance at the location level



Plus...Wireless Hardware

Bluetooth-enabled, direct thermal printer and Android tablet

ASK ABOUT INTEGRATION WITH NUTRITICS

Complete Recipe & Nutrition Calculation Software

Labeling Adhesives for Every Application



DissolveMark™ - \$\$\$

- Dissolvable adhesive & label face
- Dissolves completely in 30 seconds in any water temperature
- Leaves no adhesive residue
- Only patented direct thermal, dissolving label
- Working temp. -40°F to 176°F
- Min. application temp. 21°F
- FSC®-certified



ToughMark™ - \$\$

- Repositionable adhesive
- Label face is virtually tear-proof
- Easiest to remove and transfer
- Leaves no adhesive buildup
- Working temp. -20°F to 250°F
- Min. application temp. 25°F




MoveMark™ - \$

- Removable adhesive
- Easy to remove and transfer
- Leaves no adhesive buildup
- Working temp. -40°F to 160°F
- Min. application temp. 10°F



DuraMark™ - \$

- Permanent adhesive
- Working temp. -40°F to 160°F
- Min. application temp. 10°F



TamperSeal™ - \$\$

- Aggressive adhesive
- Tamper evident
- Working temp. -65°F to 160°F
- Min. application temp. 35°F



FOOD SAFETY



KITCHEN AUTOMATION

THE DIFFERENCE IS NIGHT AND DAY.™

800.847.0101

daymarklabels.com



Safety Systems