

ANCHORAGE CONNECTORS AND SYSTEM KITS

PERMANENT ANCHORAGE CONNECTORS

MOUNTED D-RING

SKU	Description
410/	Steel D-ring anchor with mounting bracket, 400lb maximum capacity. For use by ONE person only




410/

BEAM TROLLEY

Adjustable and slides along with the worker to provide maximum mobility. 400 lb maximum capacity.

SKU	Description
9065/BK	Beam Trolley adjusts to fit beam flanges from 3 in to 4-1/2 in wide
LIGHTWEIGHT BEAM TROLLEY RETROFIT KITS	
9065-1/	Kit converts 9065/BK beam trolley to accommodate I-beams up to 8-1/2 in wide
9065-2/	Kit converts 9065/BK beam trolley to accommodate I-beams up to 12 in wide

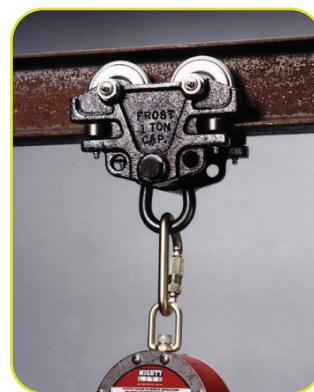

9065/BK

D-BOLT ANCHORS

Anchorage Connectors are designed as the intermediary for securing a connecting device to an anchorage. The anchorage should be easily accessible, located a safe distance above any lower obstacles and support 5,000 lbs per worker. 400lb maximum capacity.

SKU	Description
415/	D-bolt Anchor for up to 3/4 in working thickness, includes a 1/2 in diameter bolt with lockwasher and nut
416/	D-bolt Anchor for up to 4 in working thickness, includes a 5/8 in diameter bolt with lockwasher and nut
416SS/	Stainless Steel D-bolt Anchor for up to 4 in working thickness, includes a 5/8 in diameter bolt with lockwasher and nut
417/	D-bolt Anchor accommodate 5/8 in fastener, without hardware
417SS/	Stainless Steel D-bolt Anchor, without hardware
418/	D-bolt Anchor for up to 4 in working thickness includes a 3/4 in diameter bolt with lockwasher and nut
419/	D-bolt Anchor accommodate 3/4 in fasteners without hardware



415/



416/