



Ballylift Model # BL-315



Cantilevered platform extends 34" beyond base frame



Rolls thru standard doorway

FEATURES:

- Totally enclosed platform with 42" guardrails, midrails, and gate; 4" toeboards and skid resistant mat
- Two platform styles available:
 - Standard platform with steel deck (BL-315)
 - Cantilevered platform w/aluminum deck (BL-C14)
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position while anti-skid rungs provide access to platform when platform is raised
- Compact base frame rolls on two swivel and two rigid 6" casters
- Rails fold down for doorway passage and easy storage
- Base is 32" wide by 65" long, outriggers extend to 68" wide
- Leveling jacks secure lift to the floor
- Hydraulic hand pump provides easy lifting
- Standard finish is deep gray
- Meets/exceeds ANSI safety standards

BALLYLIFT ADJUSTABLE HEIGHT WORK PLATFORM

- **300 LB. CAPACITY**
- **Manually propelled maintenance lift providing working heights to 21' high**
- **Easy to use hydraulic hand pump**



BALLYLIFT • MANUALLY PROPELLED ONE WORKER LIFTS

	MODEL NUMBER	PLATFORM MAX	PLATFORM MIN	PLATFORM LENGTH	PLATFORM WIDTH	WEIGHT LBS.	WORKING HEIGHT
Standard	BL-315	15'	6' 4"	20"	28"	590	21'
Cantilevered	BL-C14	14'	6' 4"	64"	20"	900	20'

OPTIONAL ACCESSORIES

Tool Tray
Fluorescent tube holder
Platform duplex receptacle

CALL FOR PRICING: (800) 762-8327 OR VISIT OUR WEBSITE: WWW.BALLYMORE.COM

MR TELESCOPING HYDRAULIC MAINTENANCE LIFTS


Model Number	Working Height	Platform Height Max	Platform Height Min	Weight Lbs.
MR-15-AC	21'	15'	6' 4"	800
MR-15-DC	21'	15'	6' 4"	930
MR-20-AC	25'	19' 3"	6' 4"	1,000
MR-20-DC	25'	19' 3"	6' 4"	1,130
MR-24-AC	30'	23' 8"	6' 7"	1,200
MR-24-DC	30'	23' 8"	6' 7"	1,330
MR-28-AC	34'	28'	6' 10"	1,420
MR-28-DC	34'	28'	6' 10"	1,550

FEATURES:

- Select from maximum platform heights of 15', 19', 24' or 28'
- Roomy 28" x 36" platform
- Accommodates two workers
- Totally enclosed platform with 42" guard rails, midrails & gate; 4" toeboards and non-slip deck
- Built-in ladder with flat, skid resistant treads and grab rails provides access to platform in fully lowered position
- Rails fold for doorway passage and easy storage
- Non-marking 8" casters for easy rolling and maneuverability
- Self-storing outriggers extend from base for maximum stability
- Leveling jacks secure unit to floor and compensate for uneven surfaces



Rolls thru standard doorway

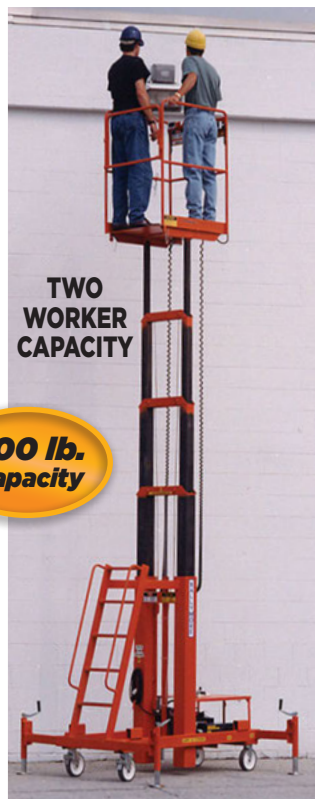

Shown with optional orange finish

MR LIFTS TELESCOPING HYDRAULIC MAINTENANCE LIFTS

- **500 LB. COMBINED TWO PERSON CAPACITY**
- **Working heights to 34'**
- **Three power options:**
 - Convenient plug in 120V AC
 - Independent 12V DC deep cycle system with battery and charger
 - Air hydraulic power requiring 90 CFM with 90 PSI pressure
- Deep gray finish
- Meets ANSI safety standards

OPTIONAL ACCESSORIES

Air-Hydraulic power
Tool Tray
Fluorescent tube holder
Platform duplex receptacle