




It's Better with Kason.

Equipment Legs & Casters

1.800.935.2766 | kasonind.com

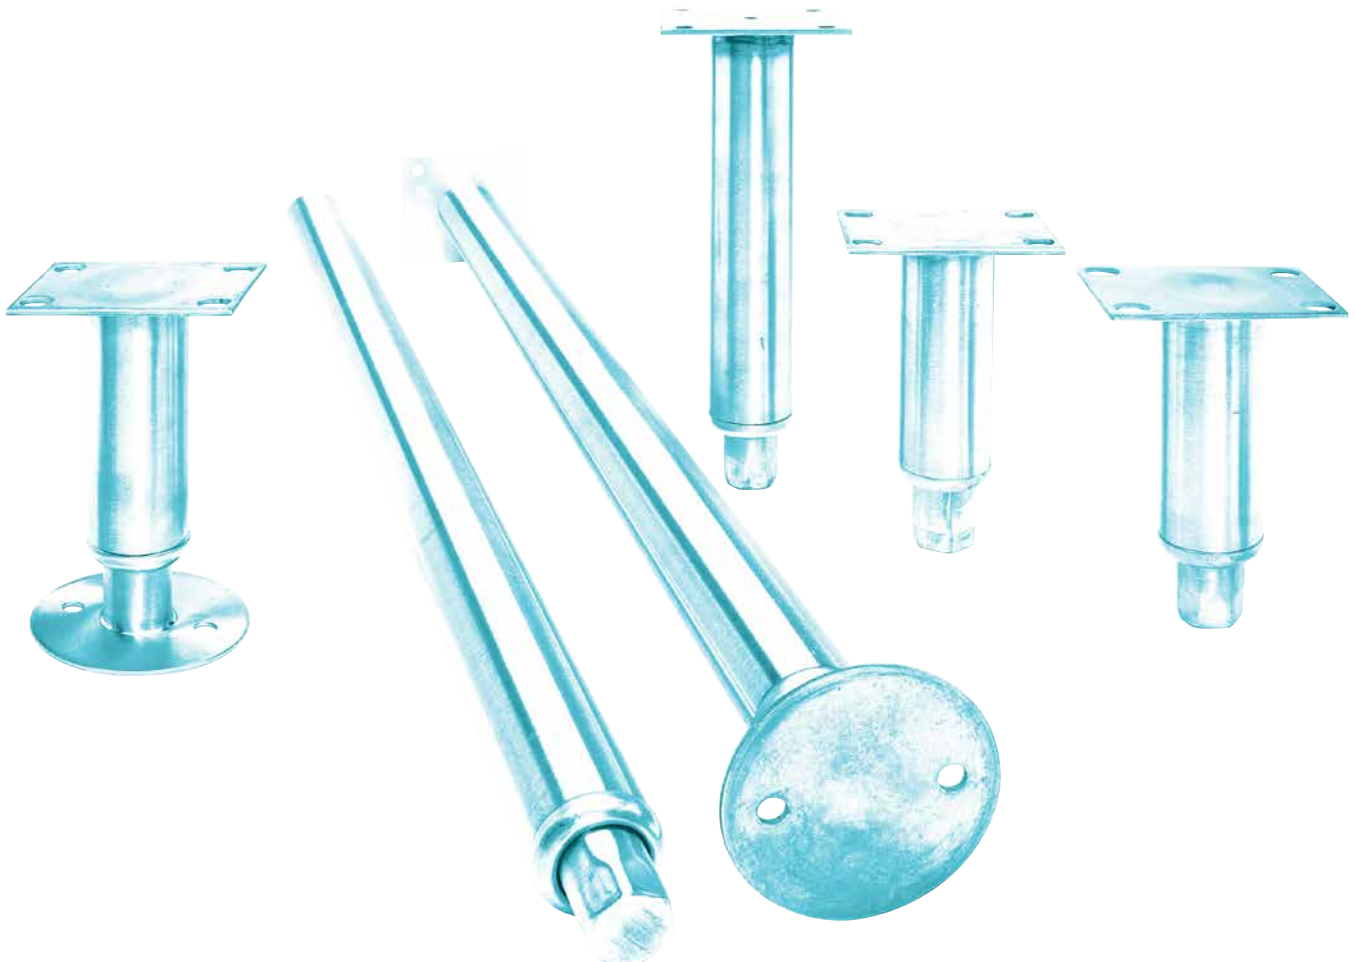

To Protect your Product Integrity

Our customers go to great lengths to build top-of-the-line coolers, freezers, foodservice equipment, industrial enclosures and delivery vans. Our goal is to preserve your product integrity by providing the highest quality door hardware and accessories for both original equipment and replacement applications.

End users need to protect products and processes, and lower operating costs. Their first line of defense is stable, airtight enclosures with doors that open with ease and close securely.

Since 1926, Kason has promised and delivered just that. Kason’s extensive lines of walk-in and reach-in door hardware satisfy the most demanding requirements. Demonstrate the value of your products with the most innovative, dependable and longlasting hardware in the business.

Research and Testing

Every Kason product must fulfill our customers’ requirements. Before we develop a new product, we research the needs of both our industry and end users. We are never satisfied with the status quo. Our dedicated research and development staff continually search for pioneering design concepts. They insist on engineering integrity, extensive product testing and precise, in-line quality control. That is how we have developed such successful and trustworthy products as SafeGuard® inside releasing safety latches, Pacesetter handles and hinges, stainless steel hinges and latches and truck door handles with removable cylinder locks.

Creative Concepts

Leading equipment manufacturers turn to Kason when they want a unique look of their own. We will adapt a stock product, design custom hardware or partner with your design engineers to develop a signature appearance just for your products. Building special and customized hardware is routine at Kason.

Quality

Kason production facilities boast state-of-the-art installations, featuring fully automated die-casting, polishing and electroplating, as well as a full range of electronically controlled and robotic machinery. We require the finest raw materials, accurate machine tolerances and the highest level of Finishing. Skilled, experienced people maintain the Kason tradition of production excellence. Our unrelenting commitment to superior manufacturing assures you consistently high quality products at the lowest possible cost. Quality assurance is integrated into every step of Kason operations to from engineering research and development through packaging and shipping.

Service

The lifeline to all your foodservice needs is our efficient and friendly Customer Service Department. A representative can quickly track product availability or the status of your order with our computerized inventory and order control system. Count on dependable global delivery as we serve you from Kason distribution centers in the continental United States and Canada as well as through authorized distributors throughout the world.

Our Promise

Satisfying your needs is our top priority. That is why Kason supplies you with hardware and accessories that reflect the same quality you demand in your own products. We strive to demonstrate an attitude that makes you want to do business with us. At Kason we offer a tradition of excellence, a philosophy of innovation and the most trusted name in specialty commercial hardware.

USA Sales & Distribution Centers
1.800.93KASON (800.935.2766)

Kason Industries, Inc.

Global Headquarters
57 Amlajack Boulevard | Newnan, GA 30265-1015, USA
800.935.3550 | FAX: 770.251.4854
Info@kasonind.com

Kason Foodservice Division
31 Amlajack Boulevard | Newnan, GA 30265-1015, USA
866.231.2157 | FAX: 770.252.8397
FoodService@kasonind.com

Kason International Division
57 Amlajack Boulevard | Newnan, GA 30265-1015, USA
770.304.3000 | FAX: 770.251.4854
International@kasonind.com

Kason Vinyl Division
31 Amlajack Boulevard | Newnan, GA 30265-1015, USA
800.472.7450 | FAX: 770.252.8397
Vinyl@kasonind.com

Kason Canada Branch
226 Industrial Pkwy North, Unit 2 | Aurora, Ontario, L4G 4C3, Canada
905.713.6515 | FAX: 905.713.6518
Canada@kasonind.com

Kason Central Branch
8889 Whitney Drive | Lewis Center, OH 43035-7106, USA
740.549.2100 | FAX: 740.549.0701
Central@kasonind.com

Kason Mid-America Branch
1239 Atlantic Avenue | Kansas City, MO 64116-4141, USA
816.472.7450 | FAX: 816.472.8580
MidAmerica@kasonind.com

Kason Western Branch
1500 East Wooley Road, Suite E
Oxnard, CA 93030-7385, USA
805.247.1088 | FAX: 805.247.1164
Western@kasonind.com

Catalog Icons

- | | |
|---|---|
|  Walk-In |  Casters & Caster Legs |
|  Vinyl |  Plumbing |
|  Sliding Doors |  Cabinet & Cafeteria |
|  Lighting & Electrical |  Canopy Hood |
|  Reach-In |  Fabrication Supplies |
|  Equipment Legs |  Truck Body |



6" Cone Equipment Leg 234

1625 Series for 1" Tubing..... 231

1645 Series Plastic Inserts..... 226

1649 Series Adjustable Equipment Legs 249

1650-2 Bullet Foot Insert Tool 234

1650/1651 Series Die-Cast Hex Inserts 226

1651 Series Die-Cast Flange Inserts..... 227

1652 Series for 1-1/2" Square Tubing..... 229

1653 Series for 1-1/4" Tubing..... 230

1654/1755 for 1-5/8" O.D. Tubing or 1-1/4" I.P.S. Pipe 232

1655 Series Corner Brackets for Adjustable Under-Shelves..... 251

1655 Series Cross Brace Fittings for 1-5/8" O.D. Vertical Legs..... 250

1655 Series Tubular Shelf Supports..... 250

1656 Series for 2" Tubing..... 228

1657 Series for 2" Square Tubing 229

1658 Mini 4" Adjustable Legs 248

1658 Series 6" Adjustable Legs..... 248

1661 Series for 1-5/8" Tubing 228

1725/1726/1740/1741 Series for 2-1/2" and 4" Appliance Legs 245

1725/1726/1740/1741 Series for 2-1/2" and 4" Suction Foot Appliance Legs..... 247

1742 Series 1" Countertop Appliance Legs..... 244

1749 Series 4" Adjustable Legs..... 246

1750, 1751 & 1752 Series..... 252

1750 Series 1-5/8" Custom Legs..... 235

1751 Series 2" Custom Legs 236

1751 Series Legs 241

1751 Series Seismic and Security Legs 240

1752 Series 1-5/8" Custom Legs 237

1752 Series Legs..... 241

1753 Series 6" Tapered Legs 238

1760 Series Stainless Steel Clad Legs with Adjustable Foot..... 239

1764/1765 Zinc Plated Steel Leg Sockets..... 233

7105 Leg and Kick Panel Clip 242


Allen Key Tool 234

Custom Equipment Legs..... 243

Custom Equipment Legs Order Form..... 252

Mounting Plates for Equipment Legs 242

1645 Series Plastic Inserts

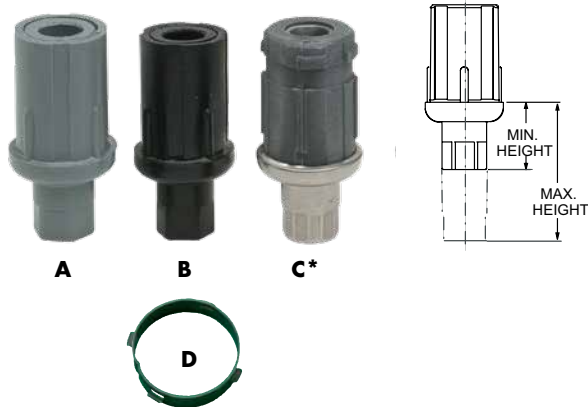

Round Foot


- Die-cast Zamak insert body with stainless steel clad foot
- Non-removable foot

Hex Foot

- Thermoplastic or die-cast Zamak insert body with die-cast or stainless steel clad foot
- Spring steel locking ring ensures tight fit when using thin-wall or oversize tubing
- Non-marking plastic glide available for some models. Order separately
- Non-removable foot

Application	Ref.	Part No.	Body	Foot	Min. Height	Max. Height	Static Load Rating lb (kg)/ft
1-5/8" (41 mm) O.D. Tubing	A	61645000257	Gray Plastic	Hex	1-3/8" (35 mm)	2-1/2" (64 mm)	200 (91)
	B	61645000258	Black Plastic	Hex	1-3/8" (35 mm)	2-1/2" (64 mm)	200 (91)
	C	61645000357	Gray Plastic	SS Clad Hex	1-3/8" (35 mm)	2-5/8" (66 mm)	300 (136)
	D	61650001000	* Accepts Locking Ring for C				

1650/1651 Series Die-Cast Hex Inserts

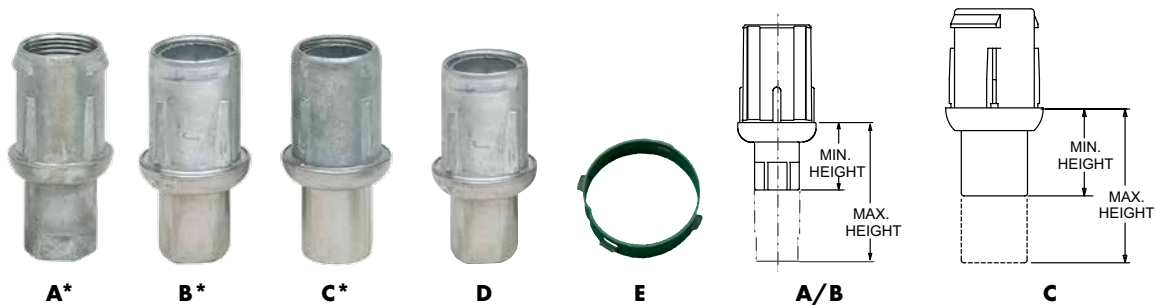

Round Foot

- Die-cast Zamak insert body with stainless steel clad foot
- Non-removable foot


Hex Foot

- Thermoplastic or die-cast Zamak insert body with die-cast or stainless steel clad foot
- Spring steel locking ring ensures tight fit when using thin-wall or oversize tubing
- Non-marking plastic glide available for some models. Order separately
- Non-removable foot

Application	Ref.	Part No.	Body	Foot	Min. Height	Max. Height	Static Load Rating lb (kg)/ft
1-5/8" (41 mm) O.D. Tubing	A	61650000257	Die-cast Zamak	Hex	1-5/16" (33 mm)	2-7/16" (62 mm)	2,000 (907)
	B	61651000257	SS Clad Zamak	Hex	1-1/2" (38 mm)	2-5/8" (66 mm)	2,000 (907)
	C	61651000256	Die-cast Zamak	SS Clad Round	1-1/2" (38 mm)	2-5/8" (66 mm)	2,000 (907)
1-1/4" Pipe and 1-1/2" O.D. Tubing	D	61651000157	Natural Zamak	SS Clad Hex	1-1/2" (38 mm)	2-5/8" (66 mm)	2,000 (907)
	Not Shown	61650000157	Natural Zamak	Hex	1-5/16" (33 mm)	2-7/16" (62 mm)	2,000 (907)
	E	61650001000	* Accepts Locking Ring for A/B/C				



1650 Not NSF Approved

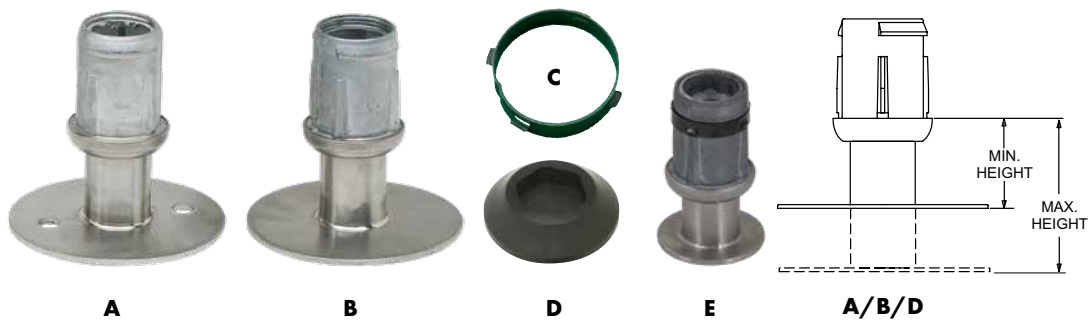

Round Foot

- Die-cast Zamak insert body with stainless steel clad foot
- Non-removable foot

Flange Foot

- Die-cast Zamak insert body
- 12 GA. (2.6 mm) stainless steel flange, #4 satin finish, with or without mounting holes
- Non-removable foot



Application	Ref.	Part No.	Body	Foot	Min. Height	Max. Height	Static Load Rating lb (kg)/ft
1-5/8" (41 mm) O.D. Tubing	A	61651000357	SS Clad Zamak	3-1/2" SS Flange, 2 Mounting Holes	1-1/2" (38 mm)	2-5/8" (66 mm)	2,000 (907)
	A	61651000357R	SS Clad Zamak	3-1/2" SS Flange, 2 Mounting Holes	1-1/2" (38 mm)	2-5/8" (66 mm)	2,000 (907)
	B	61651000358	SS Clad Zamak	3-1/2" SS Flange, No Mounting Holes	1-1/2" (38 mm)	2-5/8" (66 mm)	2,000 (907)
	C	61650001000	* Accepts Locking Ring for A/B/E				
	D	61651000001	Large Black Plastic Glide for 1651000257				
	E	61651000361R	SS Clad Zamak	2" SS Flange, No Mounting Holes	1-1/2" (38 mm)	2-5/8" (66 mm)	2,000 (907)

Note: 61651000357R comes with pre-installed locking ring.



1650 Not NSF Approved



1656 Series for 2" Tubing

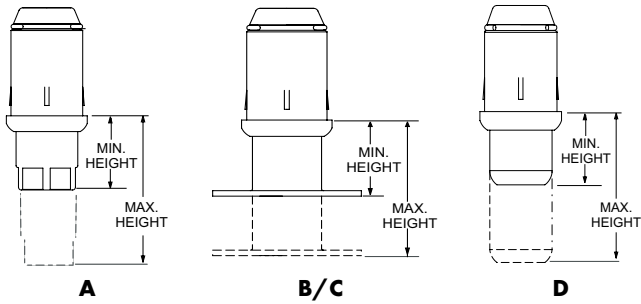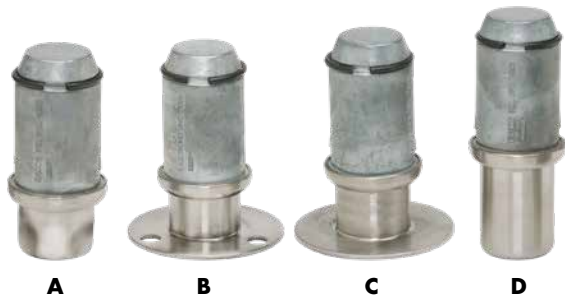

- Full 2" (51 mm) height adjustment
- Die-cast zinc insert with stainless steel-clad hex, round or flange foot
- Flange with or without mounting holes
- Features integrated locking ring

Ref.	Part No.	Foot	Min. Height	Max. Height	Static Load Rating lb (kg)/ft
A	61656000257	SS Clad Hex	1" (25 mm)	3" (76 mm)	2400 (1088.6)
B	61656000258	SS Flange, 3 Holes	1" (25 mm)	3" (76 mm)	2400 (1088.6)
C	61656000259	SS Flange, No Holes	1" (25 mm)	3" (76 mm)	2400 (1088.6)
D	61656000260	SS Round	2.094" (53.188 mm)	4" (101.6 mm)	2400 (1088.6)

1661 Series for 1-5/8" Tubing

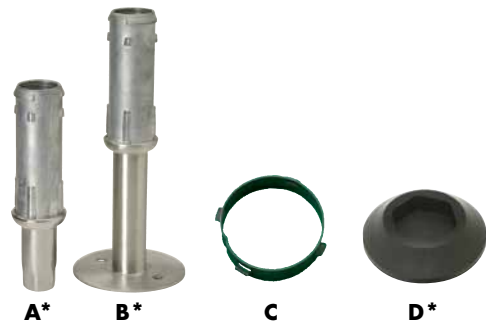

- Full 3" (76 mm) adjustment engineered to satisfy recommended food service ergonomic standards
- Provides greater tolerance and higher clearance
- Die-cast zinc insert with stainless steel-clad hex or flange foot
- Optional spring steel locking ring ensures tight fit when using thin-wall or oversize tubing. Ring and plastic glide sold separately

Ref.	Part No.	Description	Min. Height	Max. Height	Static Load Rating lb (kg)/ft
A	61661000257	3" Adj. Insert, SS Clad Hex Foot	1-1/2" (38 mm)	4-1/2" (114 mm)	2000 (907)
B	61661000357	3" Adj. Insert, SS Flange Foot, 2 Holes	1-1/2" (38 mm)	4-1/2" (114 mm)	2000 (907)
C	61650001000	Locking Ring	1-1/2" (38 mm)	4-1/2" (114 mm)	2000 (907)
D	61651000001	Black Plastic Glide for Hex Foot	1-1/2" (38 mm)	4-1/2" (114 mm)	2000 (907)




1650 Not NSF Approved

1652 Series for 1-1/2" Square Tubing




Hex



- Die-cast Zamak body, natural or nickel plated finish
- Die-cast Zamak foot, natural, stainless steel clad

Flange




- Die-cast Zamak body, chrome or nickel plated finish
- 12 GA. (2.6 mm) stainless steel flange foot with #4 satin finish, with or without mounting holes

Ref.	Part No.	Body	Foot	Min. Height	Max. Height
A	61652000257	Die-cast Zamak	Die-cast Zamak Hex	1-5/16" (33 mm)	2-7/16" (62 mm)
B	61652000258	Nickel Plated Zamak	SS Clad Hex	1-1/2" (38 mm)	2-5/8" (66 mm)
C	61652000357	Chrome Plated Zamak	SS Flange, 2 Holes	1-1/2" (38 mm)	2-5/8" (66 mm)
D	61652000358	Chrome Plated Zamak	SS Flange, No Holes	1-1/2" (38 mm)	2-5/8" (66 mm)

Static load rating 2000 lb (907 kg) per foot

1657 Series for 2" Square Tubing

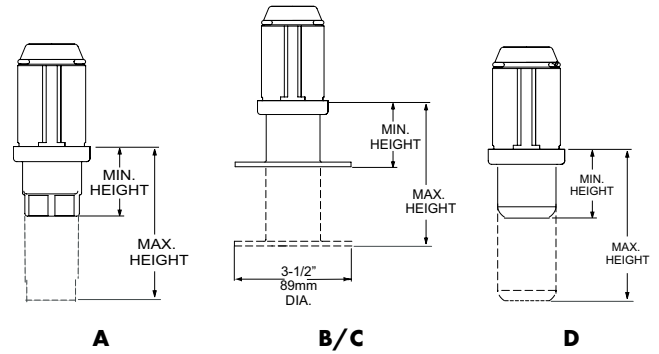


- Full 2" (51 mm) height adjustment
- Die-cast zinc insert with stainless steel-clad hex, round or flange foot
- Flange with or without mounting holes
- Features integrated locking ring

Ref.	Part No.	Body	Foot	Min. Height	Max. Height
A	61657000257	Die-cast Zamak	SS Clad Hex	1" (25 mm)	3" (76 mm)
B	61657000258	Die-cast Zamak	SS Flange, 3 Holes	1" (25 mm)	3" (76 mm)
C	61657000259	Die-cast Zamak	SS Flange, No Holes	1" (25 mm)	3" (76 mm)
D	61657000260	Die-cast Zamak	SS Round	2-7/16" (62 mm)	4-7/16" (113 mm)

Static load rating 2400 lb (1088.6 kg) per foot





1653 Series for 1-1/4" Tubing

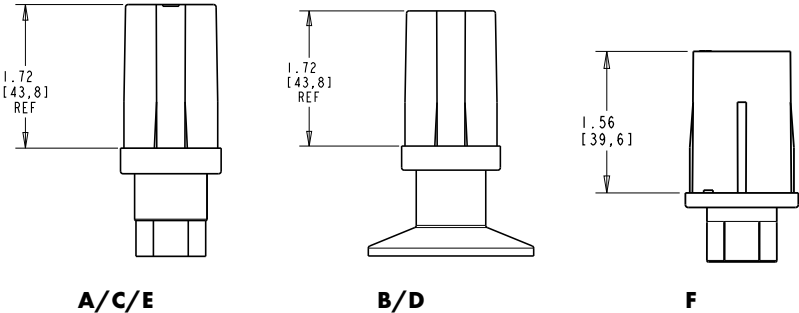

- Die-cast, Zamak body available in natural or nickel plated finish
- Feet available in hex and flange foot
- For use with 1-1/4" square or round 16 or 18 gauge tubing

Type	Ref.	Part No.	Body	Foot	Min.Height	Max. Height	Static Load Rating lb (kg)/ft
Square Tubing	A	61653000357	Natural Finish Zamak	Hex	1-3/8" (35 mm)	2-1/2" (64 mm)	2000 lb (907kg)
	B	61653000358	Nickel Plated Zamak	2-3/32" Flange	1-3/8" (35 mm)	2-3/8" (60 mm)	2000 lb (907kg)
	C	61653000359	Nickel Plated Zamak	Hex	1-5/16" (33 mm)	2-1/2" (64 mm)	2000 lb (907kg)
	D	61653000360	Nickel Plated Zamak	2-3/32" Flange, 1 Mounting Hole	1-3/8" (35 mm)	2-3/8" (60 mm)	2000 lb (907kg)
	E	61653000361	Natural Finish Zamak	Hex, 1 Mounting Hole	1-5/16" (33 mm)	2-1/2" (64 mm)	2000 lb (907kg)
Round Tubing	F	61653000362	Nickel Plated Zamak	Hex	3/4" (38 mm)	2-1/2" (64 mm)	2000 lb (907kg)



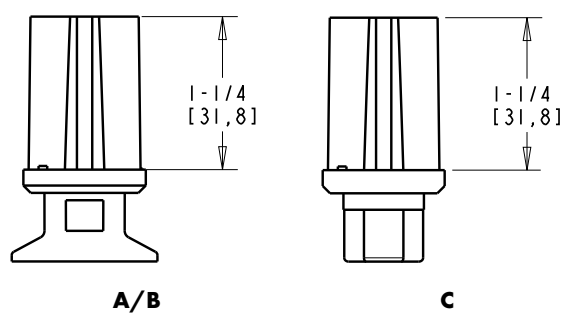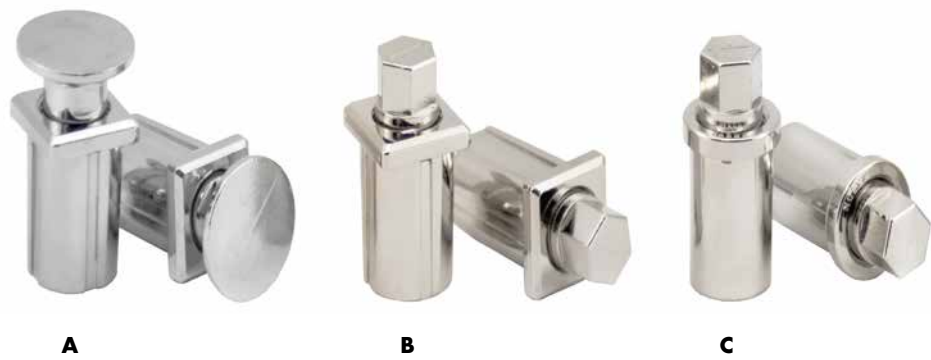

- Die-cast, Zamak body available in natural or nickel/chrome plated finish
- Feet available in hex and flange foot
- For use with 1" square or round 16 or 18 gauge tubing










Type	Ref.	Part No.	Body	Foot	Min.Height	Max. Height	Static Load Rating lb (kg)/ft
Square Tubing	Not Shown	61625000257	Natural Finish Zamak	1-3/16" Flange	3/4" (19 mm)	1-11/16" (43 mm)	1200 lb (545 kg)
	A	61625000258	Nickel Plated Zamak	1-3/16" Flange	3/4" (19 mm)	1-11/16" (43 mm)	1200 lb (545 kg)
	B	61625000357	Nickel Plated Zamak	Hex	3/4" (19 mm)	1-11/16" (43 mm)	1200 lb (545 kg)
Round Tubing	C	61625000358	Nickel Plated Zamak	Hex	3/4" (19mm)	1-11/16" (43mm)	1200 lb (545kg)

© 2022 Kason Industries, Inc.

0422 LIT 001



1654/1755 for 1-5/8" O.D. Tubing or 1-1/4" I.P.S. Pipe

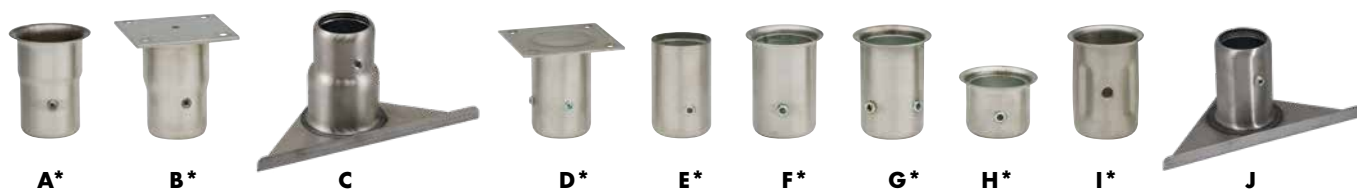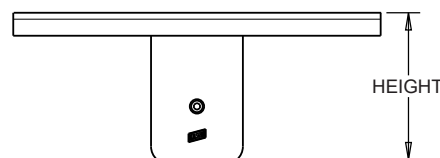
**A****B****C****D****E****F/G/H****I****J**

Application	Ref.	Part No.	Description	Height
1-5/8" (40 mm) O.D. Tubing or 1-1/4" (30 mm) I.P.S. Pipe	A	61654000260	Bell Top, 1 Set Screw	3-7/16" (87 mm)
	B	61654000280	Bell Top, Welded Plate, 1 Set Screw	3-9/16" (91 mm)
	C	61654000301	Bell Top Triangle Mounting Plate	3-1/2" (89 mm)
	D	61655000282	Straight top, Welded Plate, 2 Set Screws	3-1/4" (83 mm)
	E	61655000261	Straight Top, 1 Set Screw	3-3/16" (81 mm)
	F	61655000260	Flange Top, 1 Set Screw	3-1/8" (79 mm)
	F	61655000265	Flange Top, 1 Set Screw	3-1/8" (79 mm)
	G	61655000263	Flange Top, 2 Set Screws	3-1/8" (79 mm)
	H	61655000264	Flange Top, 1 Set Screw	1.75" (45 mm)
	I	61755000260	Flange Top, Unlined, 1 Set Screw	3-1/8" (79 mm)
	J	61655000301	Triangle Mounting Plate, 1 Set Screw	3-1/4" (83 mm)
	N/A	61655000003	NSF Plastic Plug for 3/8-24 Hex Screw	

Set screws provided. To order additional 0.375-24 set screws, specify part no. 1655000001.

- 16 GA. (1.5 mm) 300 stainless steel, #4 satin finish
- Models 1654 & 1655 lined with 12 GA. (3 mm) steel, zinc plated sleeve
- Strong 3/8-24 hex set screw provided for tight fitting leg assembly (5/16-24 set screw also available for 61655000265)
- Multiple set screw models available
- Available with 3-1/2" sq. (89 mm), 11 GA. (2.5 mm) stainless steel welded mounting plate
- For NSF applications, order optional push-in plastic plugs for set screws




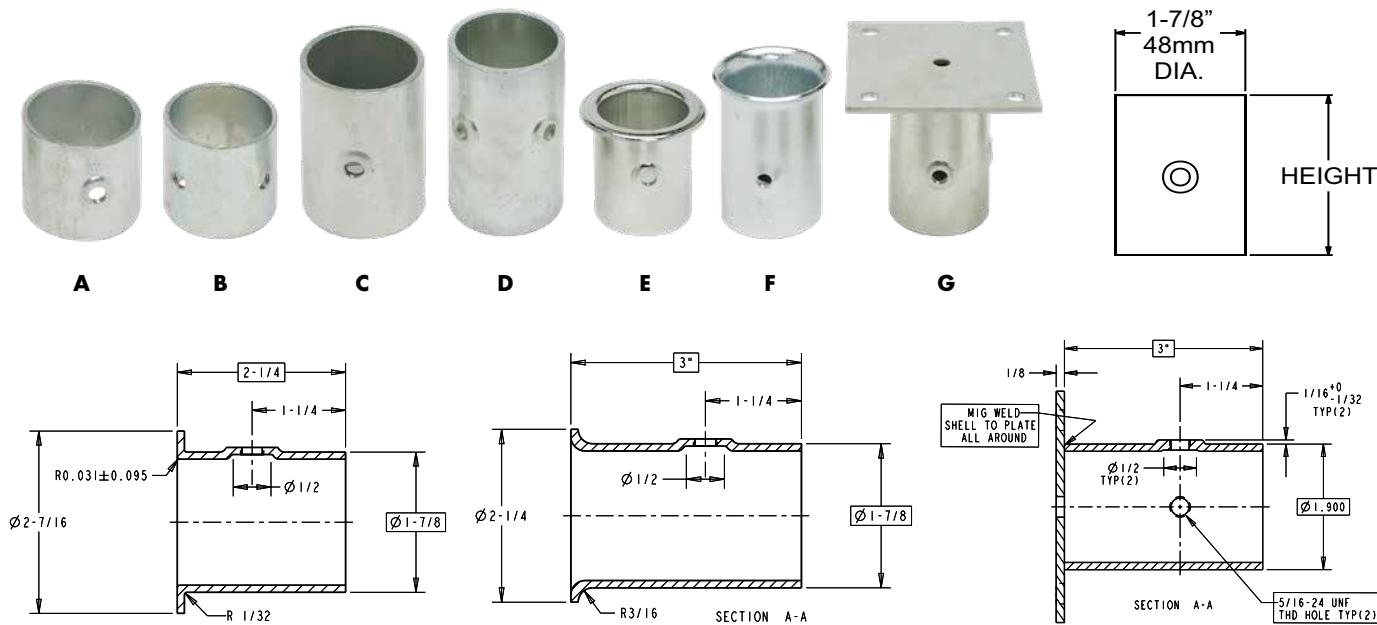

Application	Ref.	Part No.	Description	Height
1-5/8" (40 mm) O.D. tubing or 1-1/4" (30 mm) I.P.S. pipe	A	61764000008	Straight Top, 1 Set Screw Hole	1-11/16" (43 mm)
	B	61764000018	Straight Top, 2 Set Screw Holes	1-11/16" (43 mm)
	C	61765000008	Straight Top, 1 Set Screw Hole	2-9/16" (65 mm)
	D	61765000018	Straight Top, 2 Set Screw Holes	3" (76 mm)
	E	61765000014	Flange Top, 1 Set Screw Hole	2-1/4" (57 mm)
	F	61765000016	Flange Top, 1 Set Screw Hole	3" (76 mm)
	G	61765000017	Welded Mounting Plate, 3-1/2" Sq., 1 Set Screw Hole	3" (76 mm)
	Not shown	61765000001	Zinc Plated Steel Set Screw, 5/16-24 (Provided with Leg Socket)	

- Bright zinc plating prevents rust
- Multiple set screw models available
- Zinc plated steel set screws provided

6" Cone Equipment Leg

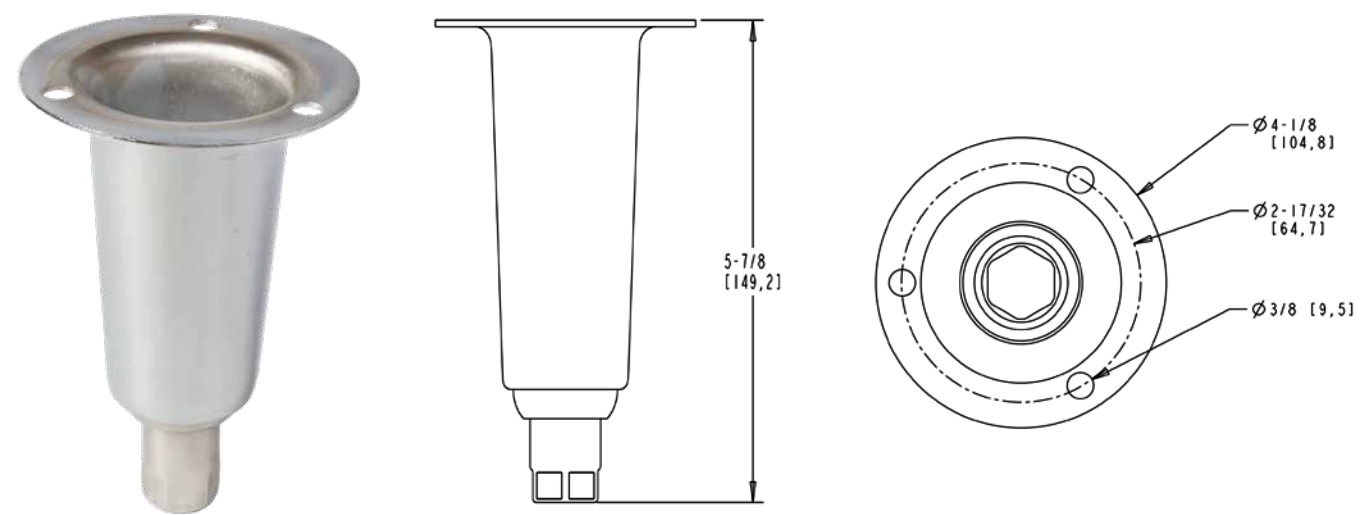

2000 lb load rating.

Part No.	Body	Min. Height	Max. Height	Foot
69000003601	Chrome Plated Steel	5-7/8"	7"	Hex Foot

1650-2 Bullet Foot Insert Tool



Slides into place on bullet feet for easier installation on tubing.

Allen Key Tool



Comfortable grip for easier installation.

Part No.	Shape	Hex Size
60000200596	Hex	5/32"
60000200597	Hex	3/16"



- 3" (76 mm) standard adjustment available
- Stainless steel tubing is 16 GA. #300 series with #4 satin finish
- Mild steel tubing, zinc plate or powder coated available special order
- Leg height to your specification from 4" (102 mm) to 36" (914 mm), with some restrictions
- Threaded steel stem, welded or separate plate options for easy mounting
- Many sizes in stock for immediate shipment

Tubing	Heights	Top Styles	Welded Mounting Plates	Description
Zinc Plated Steel 1-5/8" (40 mm) O. D., 16 GA. (1.5 mm) – or – Stainless Steel 1-5/8" (40 mm) O. D., 16 GA. (1.5 mm)	Specify in 1/8" (3 mm) increments from 4" (102 mm) to 36" (914 mm) Some restrictions apply.	Plain Weld Top		S/S Clad Zamak Hex Static Load Ratings 2000 lb (907 kg) 
		Flush Stud 1/2-13, 5/8-11	Welded Plate 3-1/2" sq. (89 mm), Round Holes 	Natural Zamak Hex Static Load Ratings 2000 lb (907 kg) 
		Through Stud 1/2-13, 5/8-11	Welded Plate 2-1/2" x 3-5/8" (64 x 92 mm), Slotted Holes 	Gray or Black Thermoplastic Hex Static Load Rating 200 lb (91 kg) 
				Plastic, SS Clad Hex Static Load Rating 300 lb (136 kg) 
				SS Flange, 2 Holes Static Load Ratings 2000 lb (907 kg) 
				SS Flange, No Holes Static Load Ratings 2000 lb (907 kg) 

Select options and user order form on Page 252. For removable plates see page 242.



1751 Series 2" Custom Legs



- Leg height to your specification (some restrictions apply)
- 3" (76 mm) standard adjustment available
- Stainless steel tubing is 16 GA. #300 series with #4 satin finish
- Integral feet
- Static load ratings up to 2000 lb (907 kg)
- Leg height to specification from 4" (102 mm) to 36" (914 mm) with some restrictions
- Many sizes in stock for immediate shipment
- Non-removable feet available
- Threaded steel stem, welded or separate plate options for easy mounting
- Special studs and mounting plates are available to meet individual mounting requirements

Tubing	Heights	Top Styles	Welded Mounting Plates	Integral Foot
Stainless Steel 2" (50 mm) O.D. 16 GA. (1.5 mm)	Specify in 1/8" (3 mm) increments from 4" (102 mm) to 36" (914 mm). Some restrictions apply.	Plain Weld Top		Hex 
		Flush Stud 1/2-13, 5/8-11 3/4 -10		Round 
			Welded Plate 3-1/2" sq. (89 mm), Round Holes	Round, Plastic Glide 
		Through Stud 1/2-13, 5/8-11 3/4 -10	Welded Plate 2-1/2" x 3-5/8" (64 x 92 mm), Slotted Holes	Flange, No Holes 
				Flange, 2 or 3 Holes 

Select options and user order form on Page 252. For removable plates see page 242.





- 3" (76 mm) standard adjustment available
- Stainless steel tubing is 16 GA. #300 series with #4 satin finish
- Integral foot
- Static load ratings up to 2000 lb (907 kg)
- Leg height to specification from 4" (102 mm) to 36" (914 mm) with some restrictions
- Many sizes in stock for immediate shipment
- Non-removable feet available
- Threaded steel stem, welded or separate plate options for easy mounting

Tubing	Heights	Top Styles	Welded Mounting Plates	Integral Foot
Stainless Steel 1-5/8" (40 mm) O.D. 16 GA. (1.5 mm)	Specify in 1/8" (3 mm) increments from 4" (102 mm) to 36" (914 mm) Some restrictions apply.	Plain Weld Top		Hex 
		Flush Stud		Round 
			Welded Plate 3-1/2" sq. (89 mm) Round Holes	Round Plastic Glide 
		Through Stud	Welded Plate 2-1/2" x 3-5/8" (64 x 92 mm) Slotted Holes	Flange, No Holes 
				Flange, 2 Holes 

Select options and user order form on Page 252. For removable plates see page 242.



1753 Series 6" Tapered Legs



- 16 GA. (1.5 mm), 300 series stainless steel, #4 satin finish
- Threaded steel stem, welded or separate plate options for easy mounting. See page 242

Ref.	Part No.	Mounting Type	Foot
A	61753HF60T5	1/2-13 Through	Hex
B	61753HF60F7	3/4-10 Flush	Hex
C	61753HF60T7	3/4-10 Through	Hex
D	61753HF60N0	Welded Plate, 3-1/2" Sq.	Hex
E	61753F360F7	3/4-10 Flush	3-Hole Flange
F	61753F360T7	3/4-10 Through	3-Hole Flange
Not Shown	61753RF60W0	Plain Weld Top	Round
Not Shown	61753HF6080	Leg B, Packed with No.1780 Mounting Plate	
Static load rating 2000 lb (907 kg) per leg.			





U. S. Patent No. 7,159,829 and D562,631

- Stainless steel clad with strong, engineered plastic internal construction
- Round foot with non-marking plastic glide
- Select from three heights
- Innovative design ensures Kason quality
- Removable mounting plates sold separately. See page 242

Product No.	Customer	Tubing	Heights/ Adjustments
1760PG60T3	Manitowoc		
1760PG60T5			
1760PG60T6		Stainless Steel Clad 1-5/8" (40 mm) O. D. 2" (50 mm) O. D.	4" (102 mm) / 1.75" (45 mm)
1760PG60T7			6" (152 mm) / 2" (50 mm)
1760NF37F7			
Static load rating 2000 lb (907 kg) per foot.			

1751 Series Seismic and Security Legs



- 16 GA. (1.5 mm) 300 series stainless steel tubing,
- 11 GA. (3 mm) flange. No. 4 satin finish
- Mounts with threaded stud or welded plate
- Special studs and mounting plates are available to meet individual mounting requirements
- See page 242 for removable mounting plates
- Static load rating 2000 lb (907 kg) per leg

Seismic Restraint Legs

- Standard 6" height/adjustable Foot
- Center hole in flange base fits over rod permanently anchored in the floor
- Leg and rod are fastened with a stainless steel pin (not furnished)
- Complies with SMACNA requirements

Security Legs

- Specified for applications requiring secured, floor-fastened, adjustable legs
- Ideal for marine and institutional uses

Leg Type	Tubing	Height
Seismic Restraint	1751 Series 2" (50 mm) O. D., 16 GA. (1.5 mm) Stainless Steel	Specify in 1/8" (3 mm) increments from 4" (102 mm) to 36" (914 mm) (some restrictions apply)
Security	1752 Series 1-5/8" (40 mm) O. D., 16 GA (1.5 mm) Stainless Steel	
Select options and user order form on Page 252.		



1751 Series Legs



Legs and mounting plates packaged together for easy ordering.

Part No.	Description	Mounting Stud
61751HF60T7	2" OD x 6" H, SS, 3/4-10 x 3/4" Through Hex Foot	3/4-10 Through Stud
61751HF60F7	2" OD x 6" L, SS, 3/4-10 Flush Hex Foot	3/4-10 Flush Stud
61751HF6080	2" OD x 6" H, SS, 17807-4 MTG Plate Hex Foot	3.5 x 3.5 Square
61751HF40T7	2" OD x 4" H, SS, 3/4-10 x 3/4" Through Hex Foot	3/4-10 Through Stud
61751HF40F7	2" OD x 4" H, SS, 3/4-10 Flush Hex Foot	3/4-10 Flush Stud
61751P360T7	2" OD x 6" H, SS, 3/4-10 x 3/4" Through P3 Foot	3/4-10 Through Stud
61751P360F7	2" OD x 6" H, SS, 3/4-10 Flush P3 Foot	3/4-10 Flush Stud
61751P36080	2" OD x 6" H, SS, 17807-4 MTG Plate P3 Foot	3.5 x 3.5 Square
61751PG60T7	2" OD x 6" H, SS, 3/4-10 x 3/4" Through PG Foot	3/4-10 Through Stud
61751PG60F7	2" OD x 6" H, SS, 3/4-10 Flush PG Foot	3/4-10 Flush Stud



1752 Series Legs



Legs and mounting plates packaged together for easy ordering.

Part No.	Description	Mounting Stud
61752HF60T5	1-5/8" OD x 6" H, SS, 1/2-13 x 3/4" Through Hex Foot	1/2-13 Through Stud
61752HF60F5	1-5/8" OD x 6" H, SS, 1/2-13 Flush Hex Foot	1/2-13 Flush Stud
61752HF6080	1-5/8" OD x 6" H, SS, 17805-4 MTG Plate Hex Foot	3.5 x 3.5 Square
61752HF40T5	1-5/8" OD x 4" H, SS, 1/2-13 x 3/4" Through Hex Foot	1/2-13 Through Stud
61752HF40F5	1-5/8" OD x 4" H, SS, 1/2-13 Flush Hex Foot	1/2-13 Flush Stud
61752HF4080	1-5/8" OD x 4" H, SS, 17805-4 MTG Plate Hex Foot	3.5 x 3.5 Square

Mounting Plates for Equipment Legs

**A****B****A****B**

- Rugged 11 GA. (3 mm) steel
- Zinc plated to prevent rust
- Recessed dimple ensures flush mounting
- Mounting holes also match many popular caster plate patterns

Ref.	Part No.	Size	Threaded Hole Size	Screw Hole Type
	61780500004	3-1/2" (88.9 mm) Sq.	1/2-13	Round
A	61780600004	3-1/2" (88.9 mm) Sq.	5/8-11	Round
	61780700004	3-1/2" (89 mm) Sq.	3/4-10	Round
	61783500004	2-1/2" x 3-5/8" (64 x 92 mm)	1/2-13	Slotted
B	61783600004	2-1/2" x 3-5/8" (64 x 92 mm)	5/8-11	Slotted
	61783700004	2-1/2" x 3-5/8" (64 x 92 mm)	3/4-10	Slotted

7105 Leg and Kick Panel Clip

**A*****B**

- Holds removable panels
- Clips snap on and off
- Great for maintenance access
- Allows for easy mounting of kick panel plates

Ref.	Part No.	Description
A	67105000004	Steel spring clip up to 2" tubing
	67105000005	
B	67105000008	Polypropylene Clip up to 1-1/2" tubing
Not Shown	67105000009	Polypropylene up to 1-5/8" tubing





- Built to your specifications
- Folded equipment legs
- Unique styles
- Heavy-duty legs and feet
- Caster legs for mobile applications
- Functional design

Kason Foodservice can engineer and fabricate virtually any type of equipment leg you desire. Our expert engineering and sales staff will assist you in the design and specification of custom legs to meet your specific needs.

Our custom fabrication facilities are second to none. Kason Foodservice equipment legs are backed by Kason's outstanding reputation for producing premier quality products.

Talk with your Kason representative or contact Kason Foodservice, toll free 866.231.2157.




1742 Series 1" Countertop Appliance Legs




- Thermoplastic or zinc body, plastic or rubber foot, steel stud
- 1" (25 mm) minimum height adjusts to 1-1/2" (38 mm) height
- Optional thread converter screws onto 1/4" stud to convert to 3/8" stud


Part No.	Leg Material	Leg Finish	Foot	Mounting Stud
61742000358	Thermoplastic	Chrome	Blk. Rubber	1/4-20
61742000359	Thermoplastic	Chrome	Blk. Rubber	3/8-16
61742000360	Thermoplastic	Black	Hex	3/8-16
61742000361	Thermoplastic	Chrome	Hex	3/8-16
61742000362	Thermoplastic	Gray	Round	1/4-20
61742000363	Thermoplastic	Gray	Round	3/8-16
61742000364	Thermoplastic	Gray	Hex	1/4-20
61742000365	Thermoplastic	Gray	Hex	3/8-16
61742000368	Thermoplastic	Chrome	Round	1/4-20
61742000369	Thermoplastic	Chrome	Hex	1/4-20
61742000370	Thermoplastic	Black	Round	1/4-20
61742000371	Thermoplastic	Black	Hex	1/4-20
61742000366	Zinc	Chrome	Round	1/4-20
61742000367	Zinc	Chrome	Round	3/8-16
61742000458	Zinc	Chrome	Blk. Rubber	1/4-20
61742000001	Thread Converter, Converts 1/4" stud to 3/8"			

Static load rating: 50 lb (23 kg) per leg

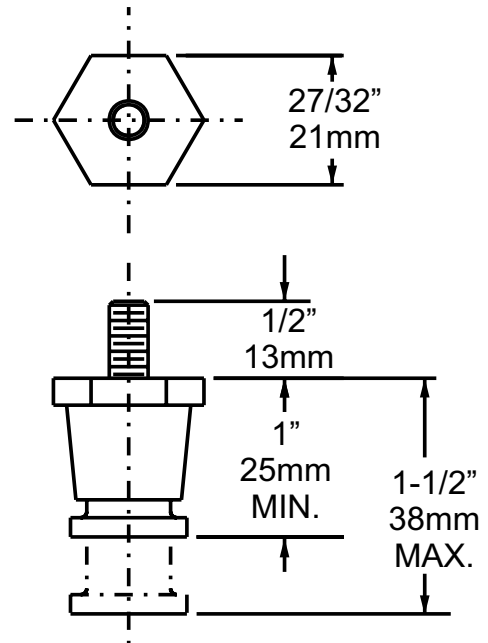


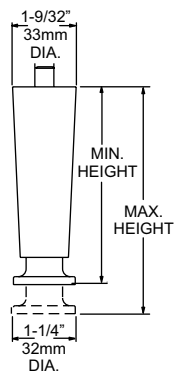


A-B

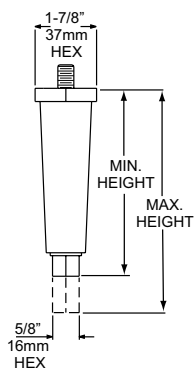

C-D/F-G

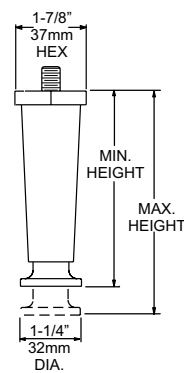

E/H-I

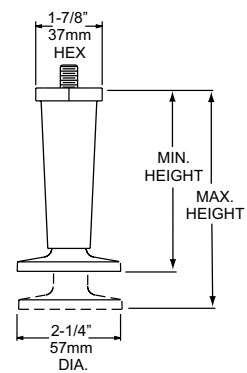

J


- Impact-resistant thermoplastic or nickel plated die-cast Zamak
- Mounts with 3/8-16 through stud; 1/4-20 through stud available
- Height adjustments shown below
- Supplied in packs of 4 for easy knock down shipping

Ref.	Part No.	Mounting	Material/Finish	Foot Type	Min. Height	Max. Height	Static Load Rating Per Leg
A	61741000358	3/8-16 Through	Nickel Plated Zamak	Flange	4" (102 mm)	5" (127 mm)	250 lb (113 kg)
B	61726000259	3/8-16 Through	Nickel Plated Zamak	Flange	2-1/2" (64 mm)	3-1/2" (89 mm)	250 lb (113 kg)
C	61725000257	3/8-16 Through	Black Thermoplastic	Hex	2-1/2" (64 mm)	3-1/2" (89 mm)	75 lb (34 kg)
D	61740000257	3/8-16 Through	Black Thermoplastic	Hex	4" (102 mm)	5-3/8" (137 mm)	75 lb (34 kg)
E	61740000258	3/8-16 Through	Black Thermoplastic	Flange	4" (102 mm)	5-3/8" (137 mm)	75 lb (34 kg)
F	61741000257	3/8-16 Through	Nickel Plated Zamak	Hex	4" (102 mm)	5-3/8" (137 mm)	250 lb (113 kg)
G	61741003257	3/8-16 Through	Nickel Plated Zamak	Non-skid Hex	4" (102 mm)	5-3/8" (137 mm)	225 lb (102 kg)
H	61741000258	3/8-16 Through	Nickel Plated Zamak	Flange	4" (102 mm)	5-3/8" (137 mm)	250 lb (113 kg)
I	61741003258	3/8-16 Through	Nickel Plated Zamak	Non-skid Flange	4" (102 mm)	5-3/8" (137 mm)	225 lb (102 kg)
J	61741000259	3/8-16 Through	Nickel Plated Zamak	Large Flange	4" (102 mm)	5-3/8" (137 mm)	250 lb (113 kg)
Not Shown	61726000257	3/8-16 Through	Nickel Plated Zamak	Hex	2-1/2" (64 mm)	3-1/2" (89 mm)	250 lb (113 kg)
Not Shown	61740000158	1/4-20 Through	Black Thermoplastic	Flange	4" (102 mm)	5-3/8" (137 mm)	75 lb (34 kg)

Special mounting studs available in 1/4-20 or metric sizes.



1749 Series 4" Adjustable Legs

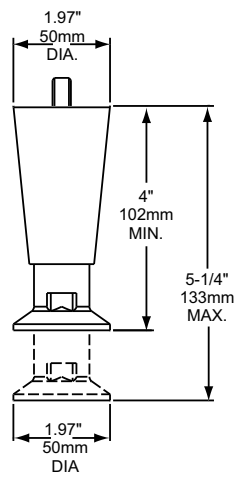

- Extra-duty construction for larger countertop appliances
- Hi-temp, impact-resistant thermoplastic body available in black or nickel finish
- Strong, die-cast flange foot is nickel plated for long wear
- Heavy-duty steel mounting stud available 3/8-16 or 1/2-13
- Height adjusts 1-1/4" (32 mm)
- Order optional non-skid foot pads separately
- 1/2-13 mounting plates available on page242

Part No.	Leg	Foot	Mounting Stud
61749000004	Black	Nickel	3/8-16 Through
61749000008	Nickel	Nickel	3/8-16 Through
61749000014	Black	Nickel	1/2-13 Through
61749000018	Nickel	Nickel	1/2-13 Through
61749000034	Nickel	Nickel	1/2-13 Flush
61749000038	Nickel	Nickel	1/2-13 Flush
6174900PAD1	Non-skid Pad for 1749 Series		
Static load rating 2000 lb (907 kg) per leg.			






- Sturdy legs with large suction cup feet keep appliances in place
- Nickel plated die-cast zinc or high impact thermoplastic leg
- Non-marring neoprene suction feet
- Injection molded foot over solid metal insert
- Fully adjustable

Ref.	Part No.	Description	Min. Height	Max. Height
A	61740002257	Black Thermoplastic	4-1/8" (102 mm)	4-7/8" (102 mm)
B	61741002257	Brushed Nickel Plated Zinc	4-1/8" (102 mm)	4-7/8" (102 mm)
C	61725002257	Black Thermoplastic	2-13/16" (52 mm)	3-9/16" (77 mm)
D	61726002257	Brushed Nickel Plated Zinc	2-13/16" (52 mm)	3-9/16" (77 mm)
E	61741002358	Brushed Nickel Plated Zinc	4-1/8" (102 mm)	4-7/8" (102 mm)


Static load rating 75 lb (34 kg) per leg.

Standard mounting stud 3/8-16 through.

Special mounting studs available in 1/4-20 or metric sizes.

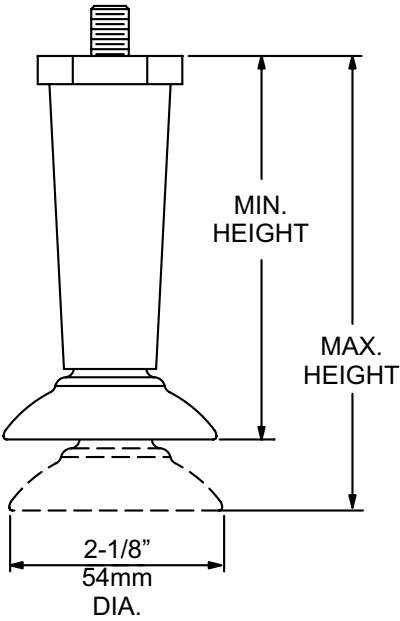


1658 Mini 4" Adjustable Legs

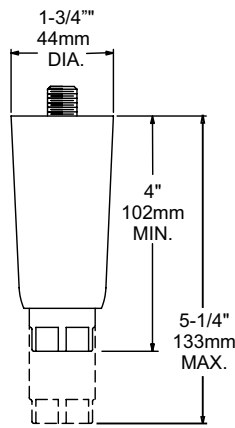

- Die-cast Zamak leg and hex foot
- Threaded steel stud for easy mounting
- Height adjusts 1-1/4" (32 mm)
- Mounting plates available on page 242

Part No.	Leg	Foot	Mounting Stud
6165800MINI	Satin Nickel Plated	Satin Nickel Plated	1/2-13 Through
Static load rating 2000 lb (907 kg) per leg.			


1658 Series 6" Adjustable Legs



- Die-cast Zamak leg and hex foot
- Threaded steel stud for easy mounting
- Height adjusts 1-3/8" (35 mm)
- Removable mounting plates are packed and sold separately. See page 242
- Gray powder coat finish is available special order
- Packed 4 per carton for knock-down shipment
- The classic 6" equipment leg

	Part No.				
Ref.	Flush Stud	Through Stud	Mounting Stud	Leg	Foot
A	6165800BN5F4	6165800BN5T4	1/2-13	Nickel Plated	Stainless Steel
B	6165800BN6F4	6165800BN6T4	5/8-11	Nickel Plated	Stainless Steel
C	6165800SB5F4	6165800SB5T4	1/2-13	Black Powder Coat	Black Powder Coat
D	6165800SB6F4	6165800SB6T4	5/8-11	Black Powder Coat	Black Powder Coat
Not Shown	6165800BN80	Leg 1658-BN Packed with 1780 Plate		Nickel Plated	Stainless Steel
Not Shown	6165800SB80	Leg 1658-SB Packed with 1780 Plate		Black Powder Coat	Black Powder Coat
Static load rating 2000 lb (907 kg) per leg.					



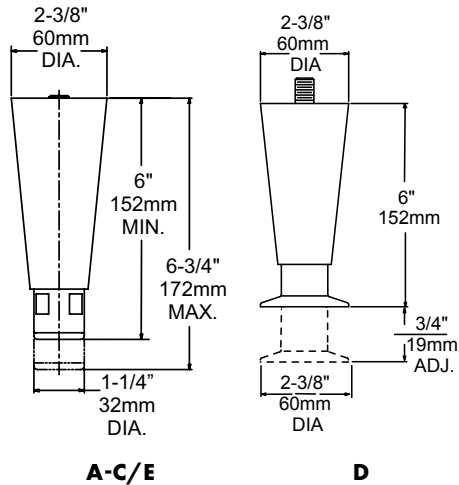

U.S. Patent No. 7,571,887




- Ideal for ice makers, reach-ins, commercial refrigerators, counters and cabinets
- Durable, black ABS plastic body
- Height adjusts 1.75" (45 mm)
- Internal, zinc-plated steel stud provides strength of metal leg
- Die-cast foot or plastic foot with internal steel reinforcement
- Available packed with plates

Ref.	Part No.	Description	Mounting Stud
A	6164900BC5F4	Hex, Chrome Plated Die-cast Zamak	1/2-13 Flush
	6164900BC5T4	Hex, Chrome Plated Die-cast Zamak	1/2-13 Through
	6164900BC6F4	Hex, Chrome Plated Zamak	5/8-11 Flush
	6164900BC6T4	Hex, Chrome Plated Zamak	5/8-11 Through
B	6164900B05F4	Hex, Die-cast Zamak	1/2-13 Flush
	6164900B05T4	Hex, Die-cast Zamak	1/2-13 Through
	6164900B06F4	Hex, Die-cast Zamak	5/8-11 Flush
	6164900B06T4	Hex, Die-cast Zamak	5/8-11 Through
C	6164900BP5F4	Hex, Black Plastic	1/2-13 Flush
	6164900BP5T4	Hex, Black Plastic	1/2-13 Through
D	61649NFBN5T4W	Nonremovable Flange, Nickel Plated Zamak	1/2-13 Through
	61649NFBN6T4W	Nonremovable Flange, Nickel Plated Zamak	5/8-11 Through
E	61649N0BN5T4W	Nonremovable Hex, Nickel Plated Zamak	1/2-13 Through
	61649N0B06T4W	Nonremovable Hex, Nickel Plated Zamak	5/8-11 Through
	61649N0BN80	Nonremovable Hex, Nickel Plated Zamak	

Static load rating 2000 lb (907 kg) per leg




1655 Series Cross Brace Fittings for 1-5/8" O.D. Vertical Legs

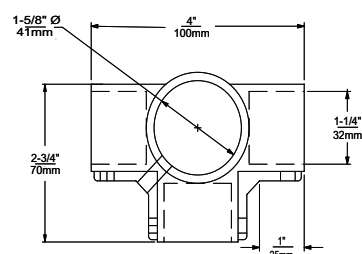**A****B****C****A****B****C**

- Quick-mate 1-5/8" (41 mm) O.D. vertical legs with 1-1/4" (32 mm) O.D. horizontal cross rails
- Die-cast aluminum construction
- Secure set screws included
- Simplify installation; no notching, welding and polishing

Application	Ref.	Part No.	Description
1-5/8" (40 mm) O.D. Legs	A	61655000800	End Fitting
w/ 1-1/4" (30 mm) O.D. Horizontal Cross Rails	B	61655000801	Corner Fitting
	C	61655000802	Center Fitting



1655 Series Tubular Shelf Supports

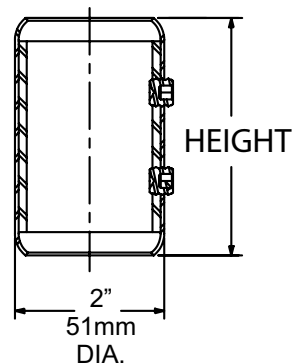**A****B****C**

- Stainless steel for 1-5/8" (40 mm) O.D. tubing
- Plated inside liner

Ref.	Part No.	Description	Height
A	61655000272	S/S w/Liner	5-1/4" (133.4 mm)
B	61655000271	S/S w/Liner	3-3/16" (80 mm)
C	61655000273	S/S w/Liner w/ 1 Set Screw	1-7/8" (47.6 mm)



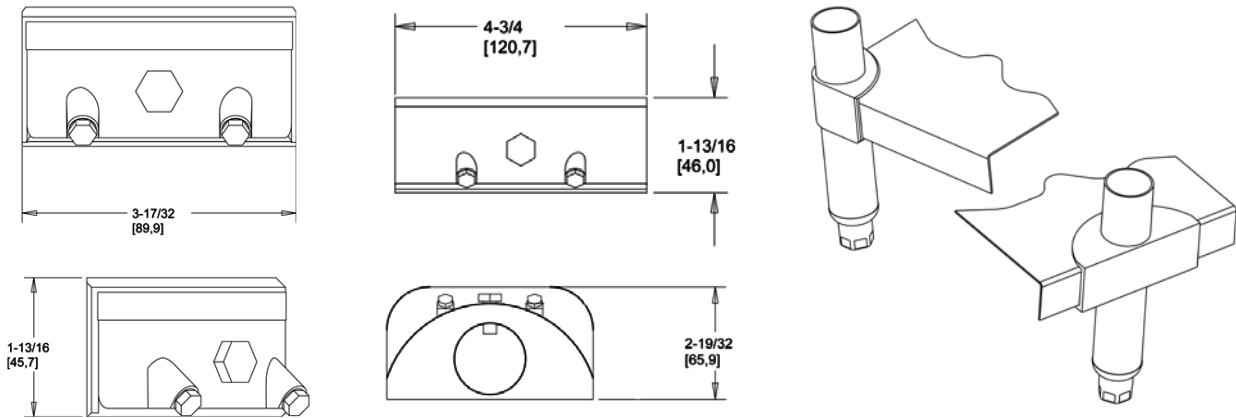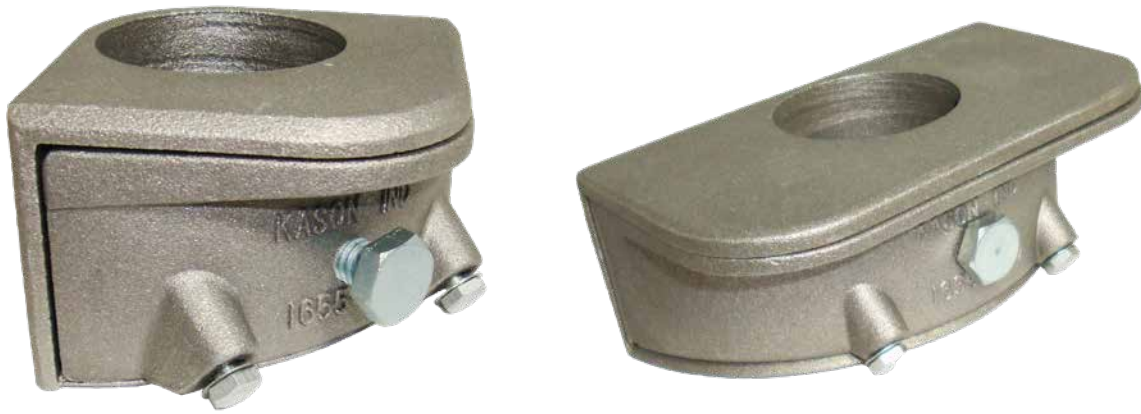

- Made of pre-finished die cast aluminum
- Designed for 1-5/8" (41 mm) O.D. tubing
- Designed to attach to pre-notched sheet metal under shelves
- Provides ability to adjust stainless table under-shelves to desired height
- Ideal for knock down shipping
- 500 lb load rating

Part No.	Description
61655001010	Under-shelf Corner Bracket, Adjustable
61655001020	Under-shelf Center Bracket, Adjustable

Custom Equipment Legs Order Form

Requested By _____

Company _____

Date _____

Address _____

Quantity _____

City _____

State _____

Zip _____

PO# _____

Phone _____

Email _____

1750, 1751 & 1752 Series

Tubing Series/Size

- ☐ 1750 1-5/8" (40 mm) O.D.
☐ 1751 2" (50 mm) O.D.
☐ 1752 1-5/8" (40 mm) O.D.

Material

- ☐ Stainless Steel
☐ Zinc Plated Steel
☐ Powder Coated

Minimum Height

(Leg top to foot bottom with foot retracted)

Maximum Height

(Leg top to foot bottom with foot extended)

Foot Type



- | | |
|---|--|
| ☐ Flange, No Holes | ☐ Black Plastic Hex |
| ☐ Flange, 2 Holes | ☐ SS Clad Plastic |
| ☐ Flange, 3 Holes | ☐ Round Toe |
| ☐ Round w/ Plastic Glide | ☐ 3" Adjustment Flange |
| ☐ Raw Hex | ☐ 3" Adjustment Hex |
| ☐ SS Clad Hex | ☐ 3" Adjustment Plastic |
| ☐ Gray Plastic Hex | |

Mounting

- ☐ Flush Stud (flush to 1/8")
☐ Through Stud (protrudes 3/4")

Stud Size

- ☐ 1/2-13
☐ 5/8-11
☐ 0.75 -10
☐ Weld Top (no stud)
☐ Mounting Plate
☐ Other
 • Plate Type _____

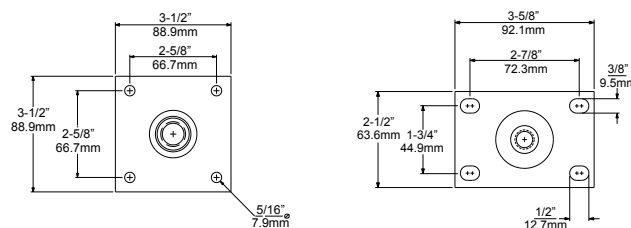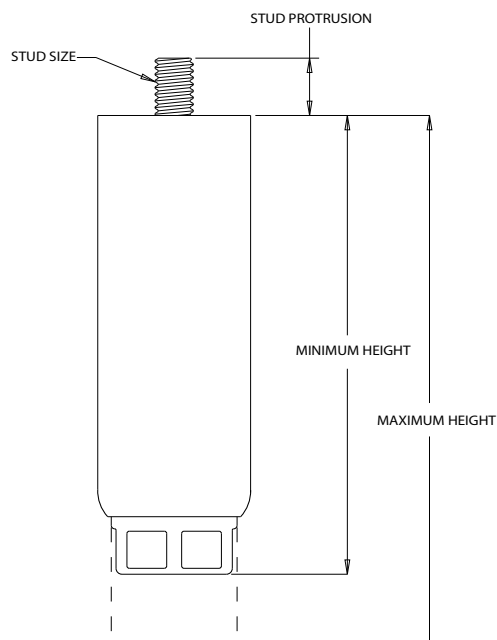

List Special Requirements

Submit for quotation to your Kason representative or to Kason Foodservice Division, fax 770.252.8397. Phone toll free 866.231.2157.