



Q2SSM-S, Q3SSM-S

Q-Series Self-Service Self-Contained Merchandisers - Standard



ADVANTAGES

Increase Impulse Buys

Display promo items from meat, deli, produce or bakery to increase sales.

Extend Product Shelf Life

Adjustable controls to set ideal temperatures based on products being merchandised

Simple Temperature Adjustment

Easily converts from meat to produce temperatures by store personnel

Merchandising Flexibility

Create ideal product facings for the product being merchandised using optional wire racks, shelves, or steps.



KEY FEATURES

Low GWP All-Natural Refrigerant

R-290 refrigerant meets all regulatory requirements and complies with the AIM Act

Location Flexibility

Plug & play design with casters allow you to feature products anywhere in your store



Q2SSM4SPA



Q3SSM4SPA



1.800.592.2060



www.hussmann.com

Q2SSM-S, Q3SSM-S Q-Series Self-Service Self-Contained Displays

SHORTENED LEAD TIMES

- Product is built on standard assembly lines

STANDARD

- Low GWP All-Natural Refrigerant R-290 meets all regulatory requirements and complies with the AIM Act
- Color exterior - black, includes painted metal case top
- Color interior - black
- Bumper - 1" black vinyl
- Shelves - Q2 - 12", Q3 - 12" and 18"
- Shelf lighting - LED ready
- Canopy lighting - LED ready
- Deck has angled adjustable wire rack
- 10" tall, 1/2" thick Plexiglas front
- Black thermoplastic front ledge
- Danfoss controller with demand defrost accessed from the front
- Energy efficient fans
- View end panel
- Power cord
- Rear air discharge flue
- Recessed caster base

OPTIONS

- LED canopy lighting: ☐ Yes ☐ No
- LED shelf lighting: ☐ Yes ☐ No
- End Panel type: ☐ View ☐ Solid

TECHNICAL INFORMATION




Scan or click QR to access additional resources at hussmann.com

DIMENSIONS


2 level

- ☐ 2' (Q2SSM2SPA)
- ☐ 4' (Q2SSM4SPA)
- ☐ 6' (Q2SSM6SPA)
- ☐ 8' (Q2SSM8SPA)

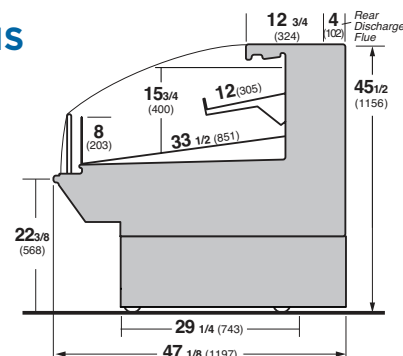

3 level

- ☐ 2' (Q3SSM2SPA)
- ☐ 4' (Q3SSM4SPA)
- ☐ 6' (Q3SSM6SPA)
- ☐ 8' (Q3SSM8SPA)

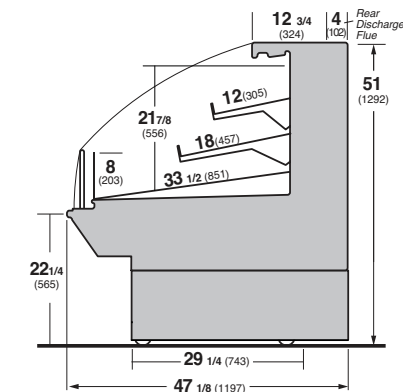

Note Dimension are in Inches (millimeters)

Model	L	D	H	Nom. HP	Ref.	Hz/Ph	Volts	Circuit Amps	Fuse Amps	NEMA Plug	Refrig. Load	A/C Load	Shipping Weight (approx.)
Q2SSM2SPA	22-1/8" (662)	47-1/8" (1196)	45-3/8" (1154)	.31	R-290	60/1	120	7.6 A	15 A	L5-15P	2480 BTU/h	2867 BTU/h	200 lb
Q2SSM4SPA	49-7/8" (1267)	47-1/8" (1196)	45-3/8" (1154)	1/2	R-290	60/1	120	12.5 A	20 A	L5-20P	3040 BTU/h	5584 BTU/h	400 lb
Q2SSM6SPA	74" (1880)	47-1/8" (1197)	45-3/8" (1154)	1	R-290	60/1	208	10.1 A	20 A	L14-20P	7170 BTU/h	8776 BTU/h	900 lb
Q2SSM8SPA	98" (2489)	47-1/8" (1197)	45-3/8" (1154)	.54 (2X)	R-290	60/1	208	12.8 A	20 A	L14-20P	4310 BTU/h	8904 BTU/h	200 lb
Q3SSM2SPA	26-1/8" (664)	47-1/8" (1197)	51" (1327)	.34	R-290	60/1	120	7.5 A	20 A	L5-15P	2480 BTU/h	3393 BTU/h	250 lb
Q3SSM4SPA	50" (1267)	47-1/8" (1197)	51" (1327)	1	R-290	60/1	120	12.1 A	20 A	L5-20P	4840 BTU/h	6749 BTU/h	700 lb
Q3SSM6SPA	74" (1880)	47-1/8" (1197)	51" (1327)	1	R-290	60/1	208	10.1 A	20 A	L14-20P	7200 BTU/h	10036 BTU/h	900 lb
Q3SSM8SPA	98" (2489)	47-1/8" (1197)	51" (1327)	.61(2x)	R-290	60/1	208	12.5 A	20 A	L14-20P	4860(2x) BTU/h	13498 BTU/h	1200 lb

NOTE: These merchandisers are designed for use in stores when temperature and humidity do not exceed 75° F (23.9° C) and 55% R.H.

We reserve the right to change or revise specifications and product design in connection with any feature of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions, or replacements for equipment previously sold or shipped.

Use Hussmann's technical data sheets to get dimensions for all store layout purposes.

For additional resources, contact your representative or visit www.hussmann.com.



NEMA L5-20P



NEMA L5-20P



L14-20P



HUSSMANN®

Hussmann Corporation
12999 St. Charles Rock Rd.
Bridgeton, MO 63044-2483
Ph: 1.800.592.2060

www.hussmann.com