



rPET PACKAGING TAPES

Shurtape® Recycled Series Packaging Tapes are made from 90% Post-Consumer Recycled (PCR) Polyester, found in PET bottles and rigid containers, and are designed to significantly reduce virgin plastic use in carton sealing operations, while contributing to a more circular plastics economy.

By combining an rPET film-based backing with our high-performance hot melt adhesive, these tapes offer uncompromised strength and functionality to provide a drop-in case sealing solution with the reliability and performance you demand.







No matter your sealing situation, Recycled Series Packaging Tapes seamlessly integrate into existing packaging lines to deliver sustainable and secure seals.






rPET PACKAGING TAPES

TECHNICAL SPECIFICATIONS

		Adhesion to Stainless Steel	Thickness	Tensile Strength	Elongation	Service Temperature Range	Application Temperature Range
 <p>HP 100</p> <p>General purpose packaging tape made with 90% post-consumer recycled (PCR) rPET film for manual or automated carton sealing. rHP 100 is engineered with an aggressive, high-tack hot melt adhesive and features Hold Strong® technology to keep carton seals intact.</p> 		53 oz/in width	1.3 mils	19 lbs/in width	125%	-20 F – 150 F	35 F – 110 F
 <p>HP 235</p> <p>Medium duty packaging tape made with 90% post-consumer recycled (PCR) rPET film for manual and automated carton sealing applications. rHP 235 is designed with an enhanced hot melt adhesive system and features Hold Strong® technology that offers higher shear, tack and adhesion to produce better seals, no matter the recycled content of the carton.</p> 		63 oz/in width	1.75 mils	23 lbs/in width	135%	-20 F – 150 F	35 F – 110 F
 <p>AP 201</p> <p>Medium duty packaging tape made with 90% post-consumer recycled (PCR) rPET film for manual or automated carton sealing. This sustainable packaging tape is constructed with a high-quality adhesive engineered to deliver clarity, UV resistance, premium aging characteristics and low odor.</p> 		22 oz/in width	1.3 mils	23 lbs/in width	135%	-20 F – 180 F	20 F – 110 F

*To learn more, visit Shurtape.com/RRQ.

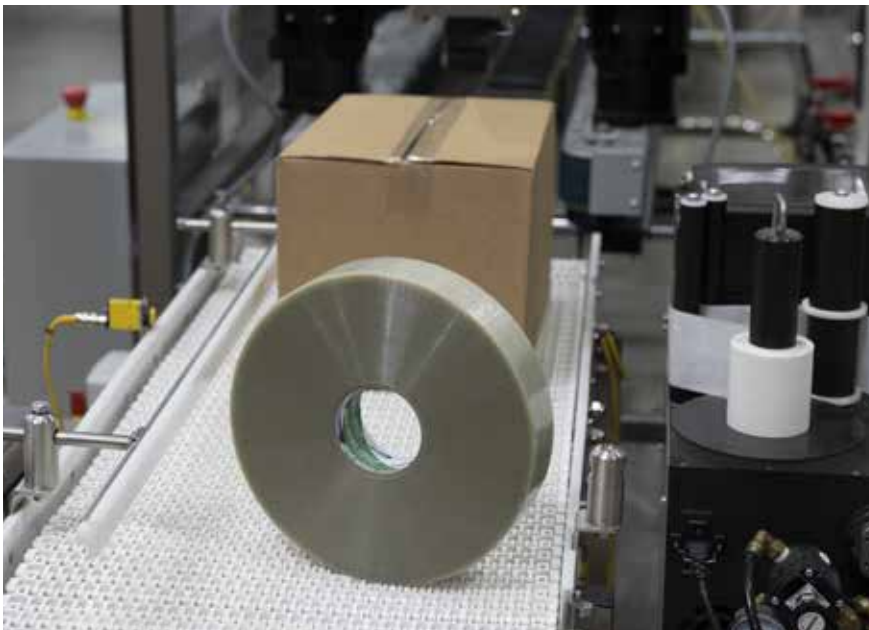

LEARN MORE

SHURTAPE.COM
1.888.442.TAPE



Shurtape®
TRUE TO YOUR WORK™

ISO 9001 CERTIFIED QUALITY SYSTEM
Printed in USA on recycled paper. © Shurtape Technologies, LLC 2025/MMC 01402