Qwik Jon® Sewage Removal Series®

Economical sewage systems designed for free-standing or built-in installation.

- Allows you to add a bathroom in previously unplumbed locations
- Choose an easy install as a freestanding unit or as a discrete installation behind the wall
- Non-clogging vortex impeller for reliable operation
- Collects used water from all fixtures including sinks, faucets, tubs, showers, and more
- Automatic reset protects the pump from thermal overload
- No gravity drain required
- Smooth surface for easy cleaning

Qwik Jon® **ULTIMA**

SPECIFICATIONS:

- Powerful 1/2 HP grinder pump
- 1" NPT discharge (can reduce down to 3/4")
- Engineered to never need cleaning and to remain maintenance-free
- Discharge can be oriented in any direction
- Cutter assembly of hardened steel
- Thermally protected motor


For more information, see Technical Data Sheet FM2800.

Qwik Jon® Toilet (Model 202) - for all Qwik Jon® models.

- ADA compliant elongated bowl
- EPA Water Sense compliant toilet with 1.28 gallon (4.8 l) per flush Includes flush handle, fill and flush valve
- Rear spigot toilet for direct connection to any Qwik Jon® model.





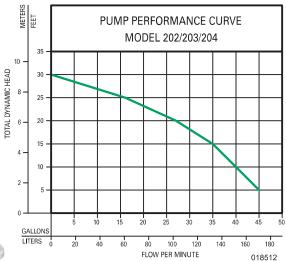


Optional Extension Kit (p/n 10-3050) - for recessed or behind-the-wall installations. Can be used with all Owik Jon® models



SPECIFICATIONS:

- A quiet, preassembled 1/2 HP grinder pump system
- Carbon/ceramic mechanical shaft seal for long life
 - Upper and lower ball bearings for efficient and quiet operation
- Non-clogging vortex impeller for reliable operation
- · Withstands total immersion (IP68)
- 1" Discharge elbow with built-in check valve
- Standard 6' (1.8 m) cord with right angle plug
- Tri-Slice® Cutter Technology three independent cutting channels provide over 250,000 cuts per minute
- Premium investment-cast 440C stainless steel cutter and cutter plate
- Flushables: toilet paper, organic waste, and sanitary items
- For residential and light commercial applications

For more information, see Technical Data Sheet FM3344.

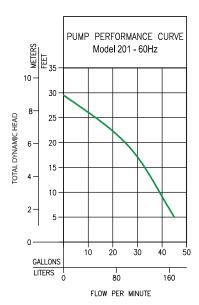





084975

CHOICE






SPECIFICATIONS:

- A quiet, preassembled 1/3 HP pump and macerator system
- Carbon/ceramic mechanical shaft seal for long life
- Upper and lower ball bearings for efficient and quiet operation
- Non-clogging vortex impeller for reliable operation
- · Recessed side handles for carrying
- Convenient snap-fit covers for easy access to macerator and electrical junction box
- Discharge elbow with built-in check valve
- Standard 6' (1.8 m) cord
- Flushables: toilet paper and organic waste
- For residential applications

For more information, see Technical Data Sheet FM3343.



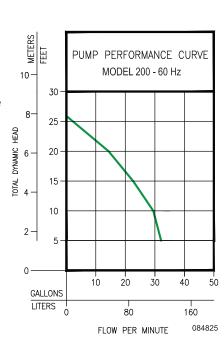

27